




1. Install Lockbox      2. Install Trims

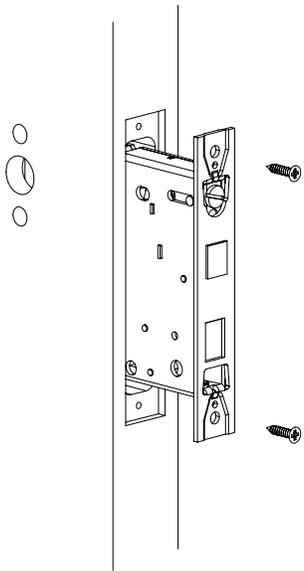

See Template for door prep





Outside

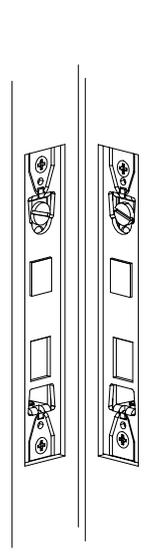

Inside

Trims Vary  
Lever shown


3. Install Faceplate      4. Install Strike Plate & Magnetic Box

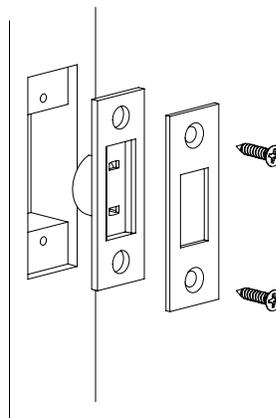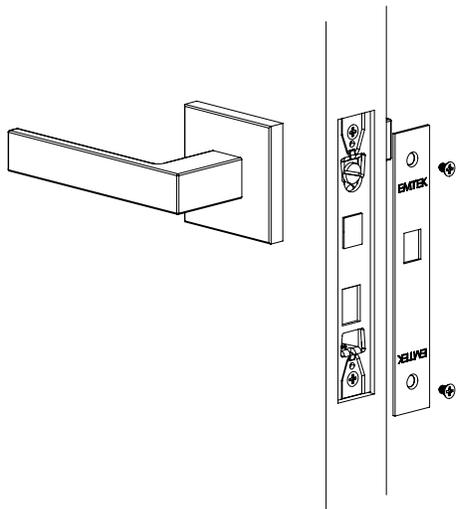


See Template for prep

Instruction to reverse Handing

Remove shoulder screw

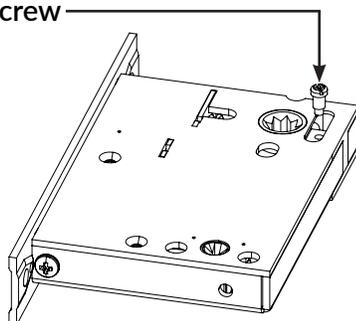

Install screw on opposite side of lock box

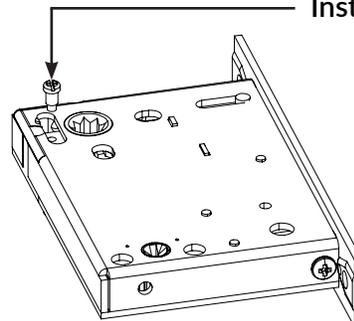

Handing can be changed to LH or RH so that the door is unlocked automatically when engaging the lever or knob from the inside. Shoulder screw should be on interior side when lock box is installed.