


INSTALLATION INSTRUCTIONS (SEE FIG. 1)

1. PREPARE DOOR JAMB/STILE PER DRAWING.
2. INSTALL MOUNTING CLIPS TO JAMB/STILE USING 8-32 X 3/8 SCREWS & PRESSED METAL NUTS. LEAVE SCREWS SLIGHTLY LOOSE TO PERMIT EASY ALIGNMENT OF CASE ASSEMBLY & CLIPS.
3. SPACERS ARE PROVIDED TO ASSURE FLUSH FINAL ASSEMBLY OF FACE PLATE & JAMB/STILE. ADD ONE OR MORE SPACERS BETWEEN JAMB/STILE & MOUNTING CLIP WHEN FACE PLATE EXTENDS BEYOND THE JAMB/STILE. WHEN THE FACE PLATE SETS INSIDE THE JAMB/STILE, SPACERS MUST BE ADDED BETWEEN THE MOUNTING CLIP & THE ELECTRIC STRIKE FACE PLATE. SEE FIG. 1 TO ATTACH SPACER TO MOUNTING CLIP. REMOVE PROTECTIVE COATING FROM SPACER & PRESS TO DESIRED MOUNTING CLIP SURFACE. MAKE SURE CLEARANCE HOLE IN SPACER ALIGNS WITH HOLE IN MOUNTING CLIP.
4. ATTACH SUBCOVER AND FACE PLATE TO THE CASE ASSEMBLY USING TWO 8-32 X 1/4 SCREWS.
5. USING WIRE NUTS PROVIDED, CONNECT WIRES COMING FROM THE STRIKE TO THE WIRES COMING FROM THE LOW VOLTAGE SIDE OF THE TRANSFORMER.
6. INSERT ELECTRIC STRIKE INTO JAMB AND ATTACH TO THE CLIPS USING TWO #12 COMBINATION SCREWS.
7. SECURE 8-32 MOUNTING CLIP SCREWS HOLDING MOUNTING TO JAMB.

STATIC STRENGTH	DYNAMIC STRENGTH	PRELOAD	ENDURANCE
1500 LBS	70 FT-LB FORCE	25 LBS	500,000 CYCLES

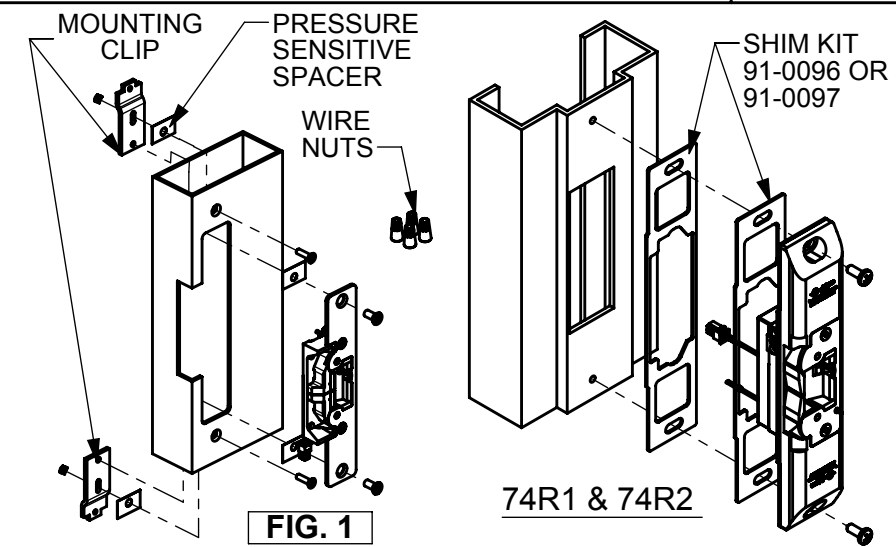

7400 ALUMINUM DOOR JAMBS

MEASUREMENT	FRACTIONAL INCHES	DECIMAL INCHES
A	DOOR CENTERLINE TO JAMB EDGE	
B	6 1/8	6.125
C	3 3/8	3.375
D	21/32	.656
E	5/8	.625
F	1 11/16	1.688
G	4 7/8	4.875
H	8-32	
I	5/32	.156
J	1 1/4	1.250

7410 ALUMINUM JAMBS

MEASUREMENT	FRACTIONAL INCHES	DECIMAL INCHES
A	DOOR CENTERLINE TO JAMB EDGE	
B	9 3/16	9.1875
C	3 3/8	3.375
D	21/32	.656
E	5/8	.625
F	1 11/16	1.688
G	7 31/32	7.969
H	12-24	
I	5/32	.156
J	1 7/16	1.4375

7430 ALUMINUM DOOR JAMBS



MEASUREMENT	FRACTIONAL INCHES	DECIMAL INCHES
A	DOOR CENTERLINE TO JAMB EDGE	
B	8 1/8	8.125
C	3 3/8	3.375
D	21/32	.651
E	5/8	.625
F	1 11/16	1.688
G	6 7/8	6.875
H	8-32	
I	5/32	.156
J	1 1/4	1.250

7401 ALUMINUM STILE

MEASUREMENT	FRACTIONAL INCHES	DECIMAL INCHES
A	DOOR CENTERLINE TO JAMB EDGE	
B	6 1/8	6.125
C	3 3/8	3.375
D	21/32	.656
E	5/8	.625
F	1 11/16	1.6875
G	4 7/8	4.875
H	8-32	
I	5/32	.156
J	1 1/4	1.25


7431 ALUMINUM STILE

MEASUREMENT	FRACTIONAL INCHES	DECIMAL INCHES
A	DOOR CENTERLINE TO JAMB EDGE	
B	8 1/8	8.125
C	3 3/8	3.375
D	21/32	.656
E	5/8	.625
F	1 11/16	1.6875
G	6 7/8	6.875
H	8-32	
I	5/32	.156
J	1 1/4	1.25

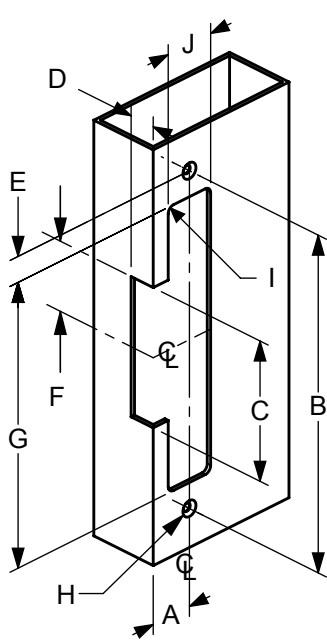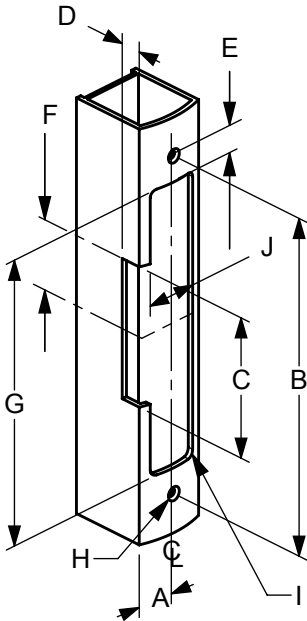

74R1 STRIKE

MEASUREMENT	FRACTIONAL INCHES	DECIMAL INCHES
A	15/16	.9375
B	8 1/4	8.250
C	4 1/2	4.500
D	2 1/4	2.250
E	1 5/8	1.625
G	1 23/32	1.719
H	Ø 3/16	

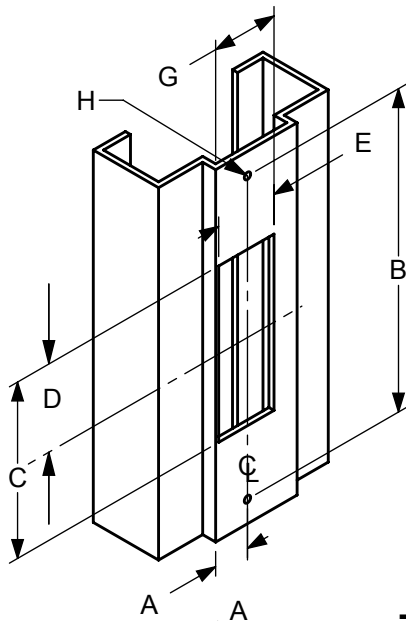


7410 WOOD JAMBS

MEASUREMENT	FRACTIONAL INCHES	DECIMAL INCHES
A	DOOR CENTERLINE TO JAMB EDGE	
B	7 7/16	7.4375
C	3 3/8	3.375
D	21/32	.656
E	1/4	.250
F	1 7/16	1.4375
G	7 15/16	7.9375
H	3/32	.09375
J	12-24	
K	5/32	.156
L	1 7/16	1.4375


7411 WOOD JAMBS

MEASUREMENT	FRACTIONAL INCHES	DECIMAL INCHES
A	DOOR CENTERLINE TO JAMB EDGE	
B	9 29/64	9.453
C	3 3/8	3.375
D	21/32	.656
E	3/8	.375
F	1 11/16	1.688
G	10 1/4	10.250
H	1/8	.125
J	12-24	
K	5/32	.156
L	1 7/16	1.4375

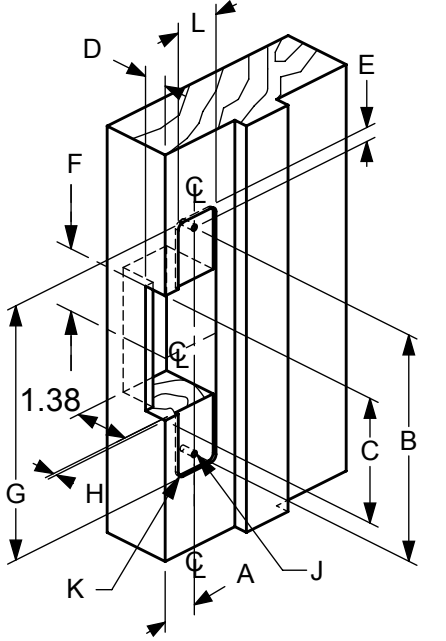

7440 METAL JAMB


MEASUREMENT	FRACTIONAL INCHES	DECIMAL INCHES
A	DOOR CENTERLINE TO JAMB EDGE	
B	4 1/8	4.125
C	3 3/8	3.375
D	21/32	.656
E	3 5/8	3.625
F	1 11/16	1.6875
G	4 7/8	4.875
H	8-32	
J	1 1/4	1.25

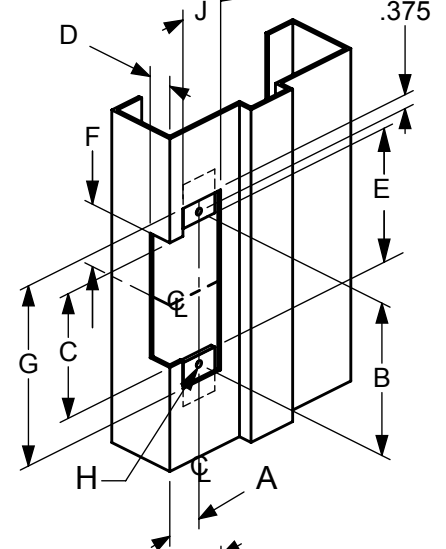

7440 WOOD DOOR*

MEASUREMENT	FRACTIONAL INCHES	DECIMAL INCHES
A	DOOR CENTERLINE TO JAMB EDGE	
B	4 1/8	4.125
C	3 3/8	3.375
D	1 23/32	1.718
E	3 5/8	3.625
F	1 11/16	1.6875
G	4 7/8	4.875
H	8-32	
J	1 1/4	1.25

* REQUIRES WDC7400

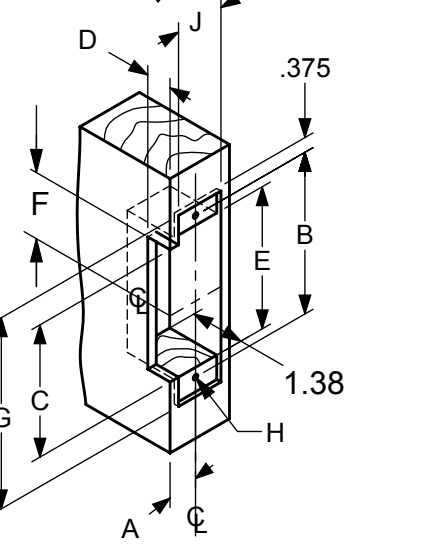


FOR EXTENDED LIP: (DIM "A" DOOR TO JAMB EDGE)			
DASH NO.	DIM "A"	DASH NO.	DIM "A"
NONE	1.06	-08	2.38
-01	1.50	-09	2.50
-02	1.63	-10	2.63
-03	1.75	-11	2.75
-04	1.88	-12	2.88
-05	2.00	-13	3.00
-06	2.13		
-07	2.25		

**PRODUCT MUST BE INSTALLED
ACCORDING TO ALL APPLICABLE
BUILDING AND LIFE SAFETY CODES**

74R2 METAL JAMB

MEASUREMENT	FRACTIONAL INCHES	DECIMAL INCHES
A	7/8	.875
B	8 1/4	8.25
C	4 1/2	4.50
D	21/32	.656
E	9 1/16	9.063
F	8-32	
G	1 5/8	1.625

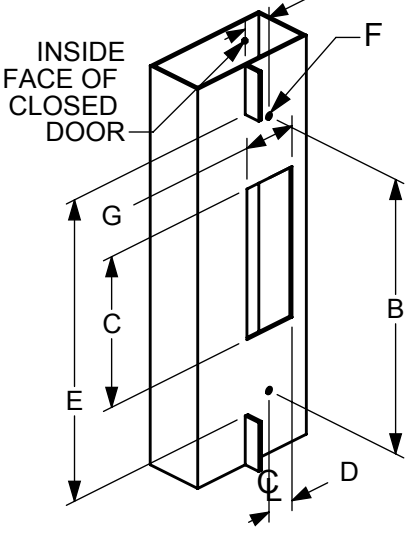

www.adamsrite.com
Phone: 800-872-3267

Fax: 800-232-7329

ASSA ABLOY

7400 ELECTRIC STRIKE

80-0180-309

Rev. 13

CR: 00170

Date: 04-26-18



**TRADEMARK
HARDWARE**
WWW.TMHARDWARE.COM

NOTES:
FAIL-SECURE OPERATION (AS SHIPPED)
UNLOCKS WHEN ENERGIZED. IF POWER FAILS, THE STRIKE REMAINS IN LOCKED POSITION.
FAIL-SAFE OPERATION (FIELD SELECTABLE)
LOCKS WHEN ENERGIZED. USED IN APPLICATIONS REQUIRING AUTOMATIC UNLOCKING IN CASE OF POWER FAILURE.

AVAILABLE VOLTAGES
12V DC CONTINUOUS DUTY,
*16V DC CONTINUOUS DUTY,
24V DC CONTINUOUS DUTY.

(* REQUIRES 16 VOLT ADAPTOR)

WIRING

THE NUMBER OF WIRES WILL VARY DEPENDING ON FEATURES OF THE STRIKE. THE VOLTAGE AND AMPERAGE RATINGS ARE MARKED ON ALL STRIKE LABELS. THE SOLENOID WIRES ARE NOT POLARIZED.


MONITORING (OPTIONAL)

MONITORED STRIKES CONTAIN TWO, INTERNALLY MOUNTED, SWITCHES: ONE IS ACTIVATED BY THE LATCH BOLT'S PENETRATION OF THE STRIKE AND THE OTHER INDICATES THE ENERGIZED LOCK/UNLOCKED STATUS OF THE SOLENOID.


ALL UNUSED LEADS FROM MONITOR SWITCHES SHOULD BE INSULATED.

COMMON CONTACT - BLACK
NORMALLY OPEN CONTACT (NO) - WHITE
NORMALLY CLOSED CONTACT (NC) - RED
MAXIMUM SWITCHING CURRENT - 500 mA @ 30 VDC

SHIM PLATES ARE PRE-INSTALLED AT THE FACTORY. A THINNER SET OF SHIMS IS ALSO INCLUDED. IF NECESSARY, THE SHIMS CAN BE REMOVED ALTOGETHER TO CORRECT MISALIGNMENTS BETWEEN STRIKE AND LATCH.

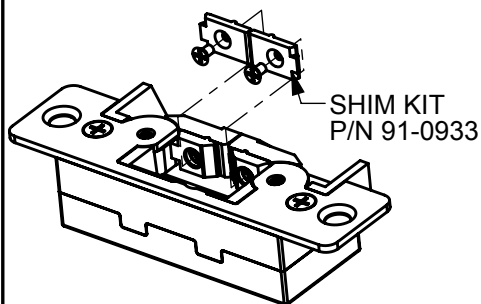


MONITORED VERSION ONLY

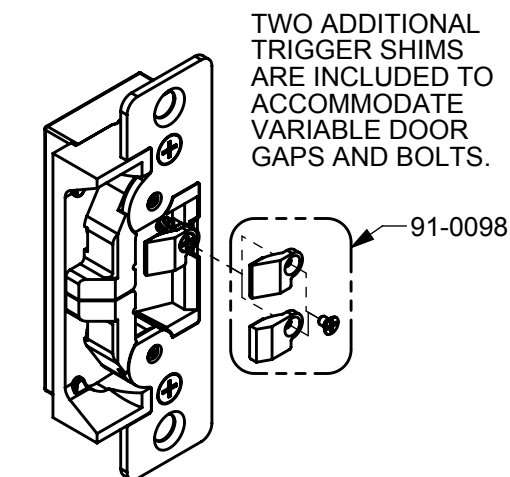

CURRENT DRAW	
VOLTS	mA
12 DC	440
24 DC	230
16 DC	458


Control Switch (N.O.)
(ex. Pushbutton, keypad, Card Reader) **DRY CONTACTS!**

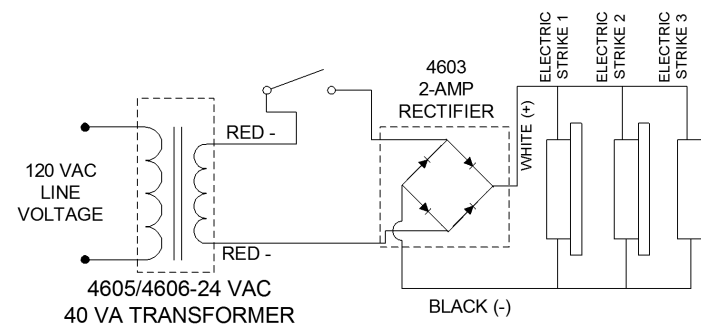

TYPICAL ELECTRIC STRIKE WIRING DIAGRAM
INTERMITTENT/CONTINUOUS DUTY 24 VDC

FIELD REVERSIBLE (FAIL-SECURE) TO FAIL-SAFE

FAIL-SAFE CONFIGURATION

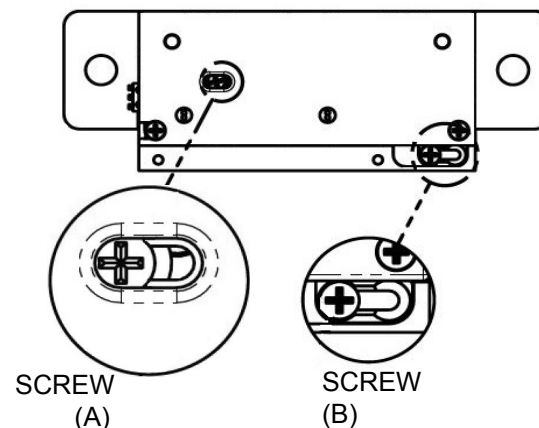


FAIL-SECURE TO FAIL-SAFE

STEP 1 LOOSEN SCREW (A) (2 TURNS ONLY!)
SHIFT TO LEFT & TIGHTEN.

STEP 2 LOOSEN SCREW (B) (2 TURNS ONLY!)
SHIFT LOWER PLATE TO RIGHT & TIGHTEN.

FIELD REVERSIBLE (FAIL-SAFE) TO FAIL-SECURE


FAIL-SECURE CONFIGURATION

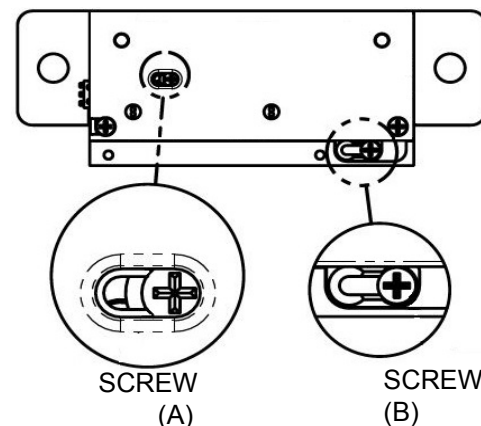

**PRODUCT MUST BE INSTALLED
ACCORDING TO ALL APPLICABLE
BUILDING AND LIFE SAFETY CODES**


WIRE CODING (MONITORED VERSION)

COLOR CODE:
Red : NC
White : NO
Black : Common

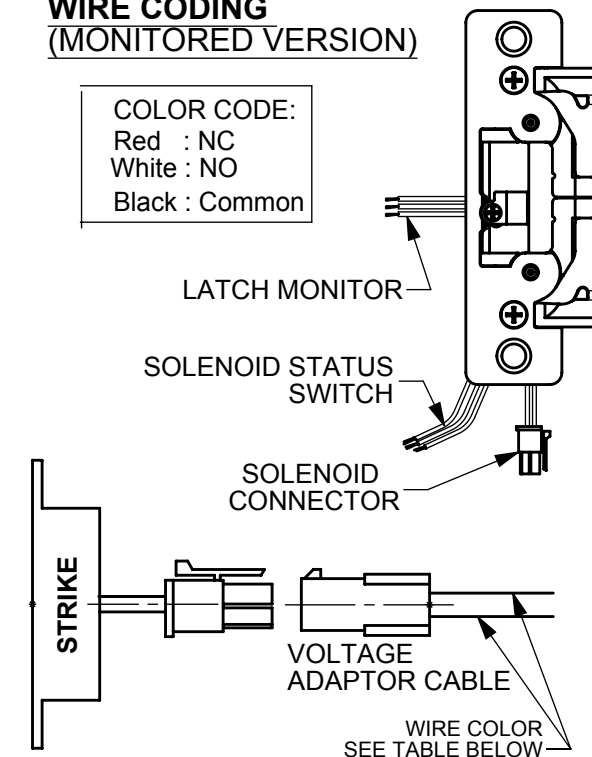

VOLTAGE ADAPTOR CABLE		
PART NO.	WIRE COLOR	APPLICATION
VA7400-12	BLACK	12VDC
VA7400-24	RED	24VDC
VA7400-16VDC (OPTIONAL KIT)	WHITE	16VDC

SOLENOID WIRING DIAGRAM

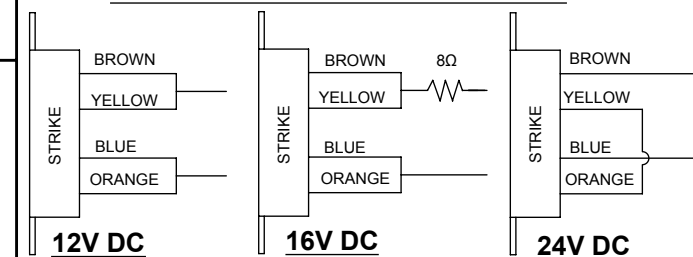

FOR WOOD DOOR APPLICATIONS

THE SPACER IS DESIGNED TO SIMPLIFY MORTISING ON WOOD DOOR APPLICATIONS

