


HIDDEN SLIDING DOOR SYSTEM

Hide Slide™ Series for Wood Doors

For Sliding Panels up to 176 lbs.




Wall to Door Clearances

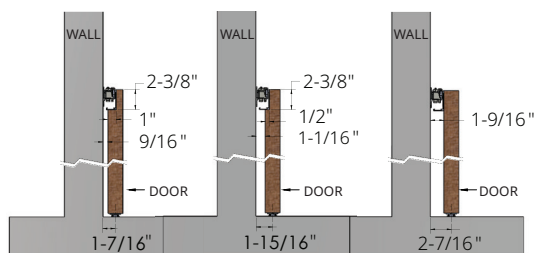

Note: Depth of top route determines clearance between wall and door.

Overlap Configurations

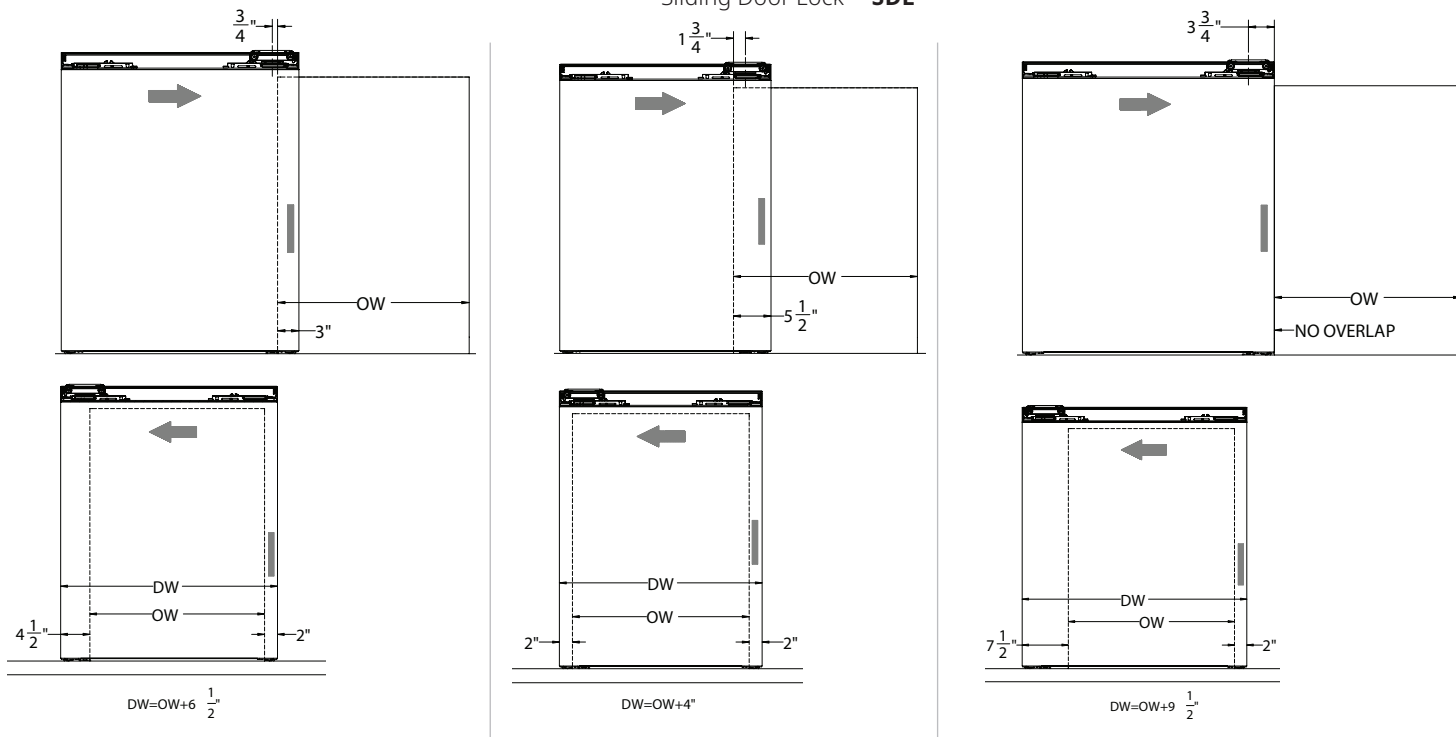

Notes: Door width determined by overlap configurations.
Minimum top of door overlap is 2-1/2", undercut 3/8"

PEMKO
ASSA ABLOY

Experience a safer
and more open world

Configurations:

- Single
- Bi-parting

Features:

- Soft open and close
- Nylon wheels with steel ball bearings for smooth operation
- 176 lb. panel capacity
- 5 year warranty
- Meets ADA push force requirements
- Patent-pending

Installations:

- Side Wall Mount (only)

Hide Slide Kits Include:

1 ea	Aluminum Track	1 ea	Top Hanger
2 ea	Soft Close Devices	2 ea	End Caps
2 ea	Back up Stops	2 ea	Top Wall Guides
2 ea	Bottom Wheels	1 ea	Bottom Guide Channel
1 ea	Bottom Guide		Insert

STANDARD KIT SIZE

Part Number	Track Length	Door Width
Hide Slide	70 7/8"	31" - 71"

Options:

Flush Pull
Mill Aluminum
Bottom Track

503SF (For Rockwood options, [click here](#))

18/1A for use when door is over carpet or any flooring that is not smooth and hard. Order 2" wide by length as required both edges beveled

Sliding Door Lock **SDL**

800-824-3018 | www.pemko.com
Check the web site for the up-to-date catalog

Copyright © 2015-2021, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.