



**TRADEMARK
HARDWARE**
WORLD OF QUALITY HARDWARE


WINDOW LOCK

**FOR USE ON DOUBLE HUNG WINDOWS TO PROVIDE
WEATHERTIGHT FASTENING AND SECURITY.**

INSTALLATION INSTRUCTIONS

TOOLS REQUIRED: Phillips screwdriver, pencil and awl.

1. Position hook side of window lock (A) on center of bottom rail of upper window, mark and secure.
2. Position cam lever side of window lock (B) on top center rail of lower window to align with hook side of window lock (A). Check for proper alignment, mark and secure.

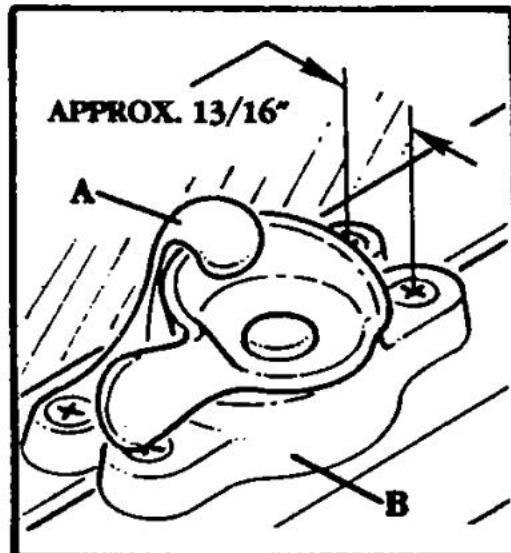

www.tmhardware.com



845-388-1300



845-388-1388



sales@tmhardware.com