

# 1. Install Lock Body


# 2. Install Outside Plate

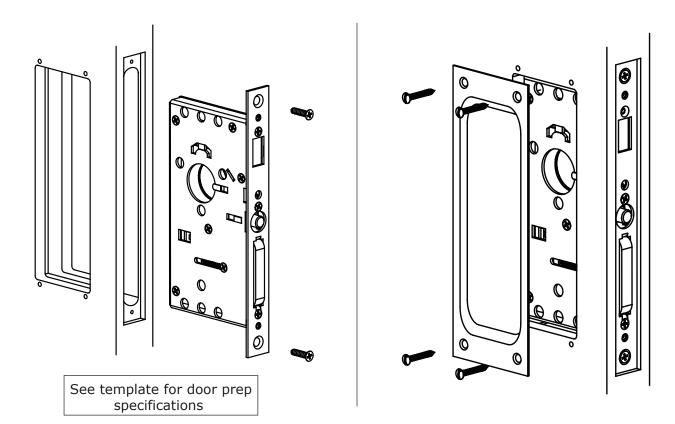

### 3. Install Inside Plate


#### 4. Install Trim Plate

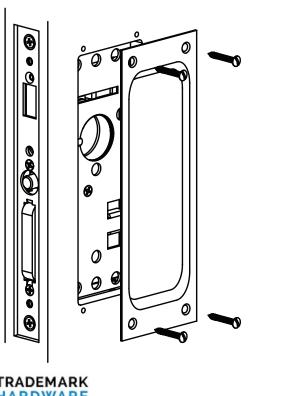

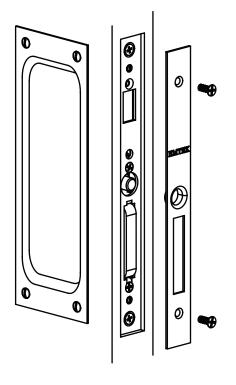


1. Install Lock Body

2. Hold Outside plate in place

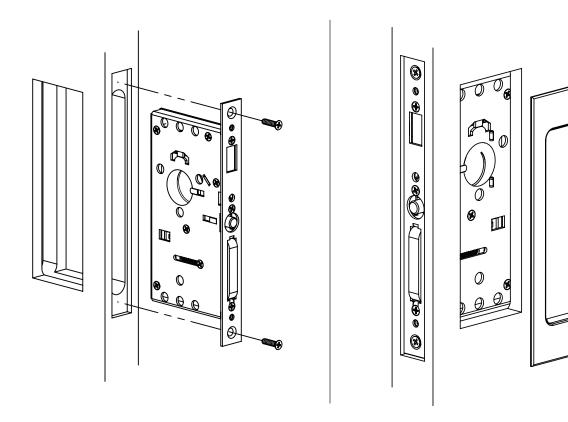

## 3. Secure both inside & outside Plates

## 4. Install Trim Plates

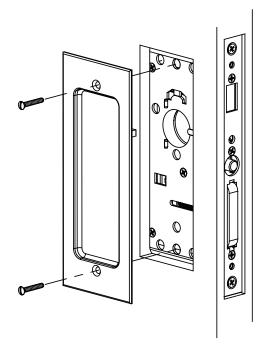

Secure both inside and outside plates using machine screws (provided)

