



Job Name/Title: _____ Catalog Number _____
Contractor: _____ Notes: _____

LED Utility Wraparound

CCT SELECTABLE



Traditional Look, Modern Features

Topaz's LED Utility Wraparound features a durable steel housing and prismatic U-shaped lens to project clear, crisp light from the bottom and sides. The similarities from a traditional 2-lamp wraparound end there as this 3 CCT selectable fixture can easily be adjusted to match any lighting environment. Versatile for a wide range of applications, this fixture can be surface mounted or suspended with the included accessories.

FEATURES

- CCT Selectable: 3000K | 4000K | 5000K
- Traditional design
- 120-277V with 0-10V dimming
- Steel housing with white finish
- Prismatic style PMMA lens
- Includes 3' hanging chains, V-hooks and mounting hardware
- Emergency battery backup kit available for 90 minutes of illumination in the event of a power outage (sold separately)

SUGGESTED APPLICATIONS

- New construction or remodel
- Garages
- Utility rooms
- Workshops
- Stairways and corridors
- Basements
- Suitable for use in closets: Compliant with NFPA 70®, NEC section 410.16 (A)(3) and 410.16 (C)(5)





Job Name/Title: _____ Catalog Number _____
Contractor: _____ Notes: _____

LED Utility Wraparound CCT SELECTABLE

GENERAL SPECIFICATIONS

Input Voltage, Frequency: 120-277V, 50/60Hz

Power Factor, THD %: >0.9, <20%

Dimmable: 0-10V down to 10%¹

Efficacy: 125 LPW

Minimum CRI: 82

Functional Life (L70): 50,000 hours

Location Rating: Dry

Ambient Operating Temperature: -5°F to 104°F

ITEM SPECIFICATIONS / ORDER INFO

Catalog Number	Order Code	UPC	Lumens	Wattage	Input Current @120/277V	CCT	Beam Angle	Size	DLC ID*
LWRAPU4/40W/CTS/D-36	70719	751338039070	4,700	40W	0.32/0.15A	3000K 4000K 5000K	150°	48"	PKGWE6O7

NOMENCLATURE

F-LWRAP = Fixture - Linear Wraparound **U4** = Utility 4' **40W** = 40 Watt / **CTS** = Color Temperature Selectable / **D** = Dimmable

ACCESSORIES (SOLD SEPARATELY)


Catalog Number	Order Code	UPC	Lumens	Wattage	Description
BEL4W-UNV	72764	847098046301	500	4W	90 Min. Emergency Battery Backup Kit

ENERGY SAVINGS

Catalog Number	LED Wattage	Fluorescent Replacement Wattage	Watts Saved	Yearly Savings	5 Year Savings
Based on 12 hours/day and \$0.11/kWh					
LWRAPU4/40W/CTS/D-36	40W	2 x 32W T8	24W	\$12	\$58

DIMENSIONS / WEIGHTS

Catalog Number	(A)	(B)	(C)	Weight	Knockout Information
LWRAPU4/40W/CTS/D-36	48.51"	5.15"	2.44"	3.5 Lbs.	(1) 1/2" KO on bottom panel (2) 1/2" KO on each side panel

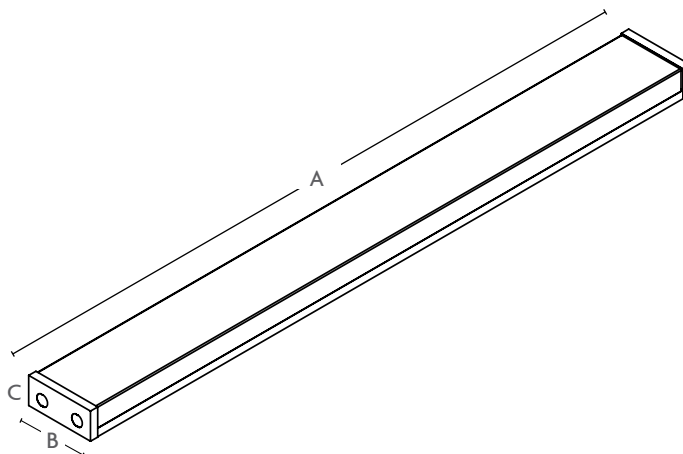

NOTES:

*DLC Primary Use: Direct Linear Ambient Luminaires

¹Dimming with standard 0-10V control system or wall dimmers. Dimming complies with IEC60929 Annex E. Fixture may not be compatible with all dimmers. Dimming performance may vary based on selected dimmer.

Visit www.topaz-usa.com/led-dimmer-compatibility for up-to-date dimmer compatibility information.

Specifications subject to change without prior notice. Replacement wattage shown depends on application and fixture.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to product packaging for more information.

Revised August 2021