

LED Outdoor Fixture Accessories

Button Photocell and Stem and Swivel Photocell



Button Photocell



Stem and Swivel Photocell

SUGGESTED APPLICATIONS

- Classic Wall Packs
- Low Profile Wall Packs
- Flood Lights
- Canopy Lights

GENERAL SPECIFICATIONS

Input Voltage, Frequency: 120-277V, 50/60Hz

Leads Info: AWG#18

Ambient Operating Temperature: -40°F to 158°F

SPECIFICATIONS / ORDER INFO

| Catalog Number | Order Code | UPC | Wattage | Rated Loading | On / Off Levels |
|-----------------------|------------|--------------|---------|---|---------------------------|
| F-WP-PC-95 | 72748 | 751338030671 | 2W | 500W Tungsten 850W Ballast 5A E-Ballast | 10-20Lx On 30-80Lx Off |
| F-WP-PC-ADJ-95 | 72749 | 751338030688 | 1.5W | 1,800W Tungsten 1,000W Ballast | 10-20Lx On 30-60Lx Off |


NOMENCLATURE

F-WP=Fixture Wall Pack **PC** = Photocell **Blank** = Button photocell
ADJ = Adjustable stem and swivel photocell

PRODUCT DIMENSIONS

| Catalog Number | Dimensions | Weight |
|-----------------------|-----------------------|----------|
| F-WP-PC-95 | 2.14" x 1.14" x 1.73" | 0.5 Lbs. |
| F-WP-PC-ADJ-95 | 3.46" x 1.06" x 180° | 0.5 Lbs. |

WIRING DIAGRAM

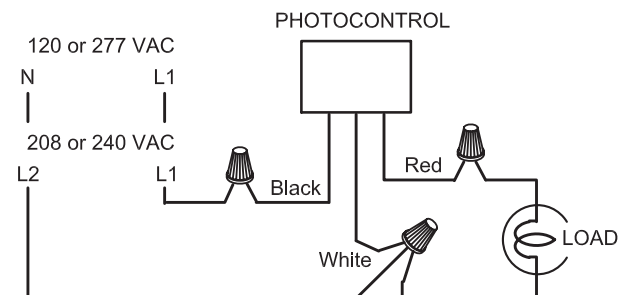

NOTES:

Specifications subject to change without prior notice.

WARNING: Some products included in this specification may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

January 2021