

## Notes:

- 1. Do not scale drawing. All dimensions given in inches (mm).
- For strike preparation refer to:
  371 Strike Template No. 7102-0005
  497 Strike Template No. 7102-0003
- 3. Backset: 2-3/4" (70mm) standard
- 4. For wood door preparation refer to Template No. 80-8150-0034-010
- Door manufacturer must provide supports within the door to keep the door from collapsing when lock is installed. Back of latch case must also be supported.

nexTouch <sup>™</sup> Cylindrical Locks				
NTB610	Cylinder Override - Push Button			
NTB620	Cylinder Override - Cap Touch			
NTB630	No Cylinder Override - Push Button			
NTB640	No Cylinder Override - Cap Touch			

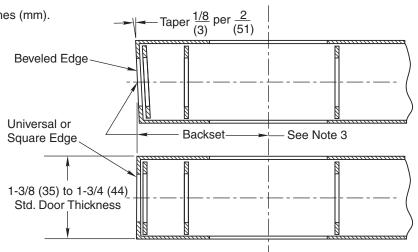

nexTouch <sup>™</sup> Cylindrical Lock Latch Options					
Latch No.	Front	Backset	Latchbolt Throw	Front Dim. A	
694 (std)	Beveled	2-3/4" (70)	1/2" (13)	1-1/8" (29)	
F694	Flat	2-3/4" (70)	1/2" (13)	1-1/8" (29)	
480B	Beveled	2-3/4" (70)	3/4" (19)	1-1/8" (29)	
F480B	Flat	2-3/4" (70)	3/4" (19)	1-1/8" (29)	

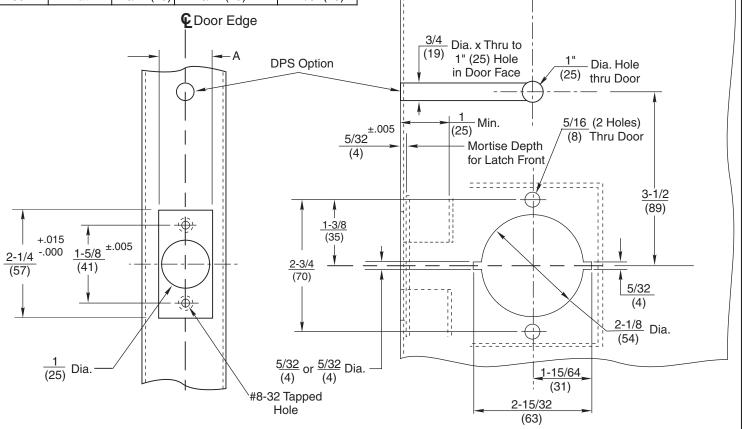

nexTouch™ Cylindrical Locks H.M. Door Preparation 2-3/4" (70mm) Backsets



C 2-1/8 Cross Bore



TEMPLATE NUMBER

DATE

80-8150-0033-010

010 | 11-17







