


5300LN SERIES Lever Locks

Backset	Latch No.	Link No.
$\frac{2-3}{4}$ (70)	380AN, 380BN	—
$\frac{3-3}{4}$ (95)	3380AN, 3380BN	—
$\frac{5}{127}$	380AN, 380BN	381AN
$\frac{6}{152}$	3380AN, 3380BN	381AN

Notes:

- When 4-7/8" (123.8) Strike is specified, refer to Yale No. 497 Strike, Template No. 7102-0003.
- When T-Strike is specified, refer to Yale No. 371 Strike, Template 7102-0005.
- Dimensions marked with * have tolerances of +.015, -0.000
- All dimensions given in inches (mm).
- Std. Locks adjustable for 1-3/8(35) to 1-3/4(44) door thicknesses. Special order locks adjustable for 2" (51) to 2-1/4" (57) door thicknesses.
- For universal or square edge doors use latchbolts with flat front (i.e. F380AN, F3380AN, etc.)

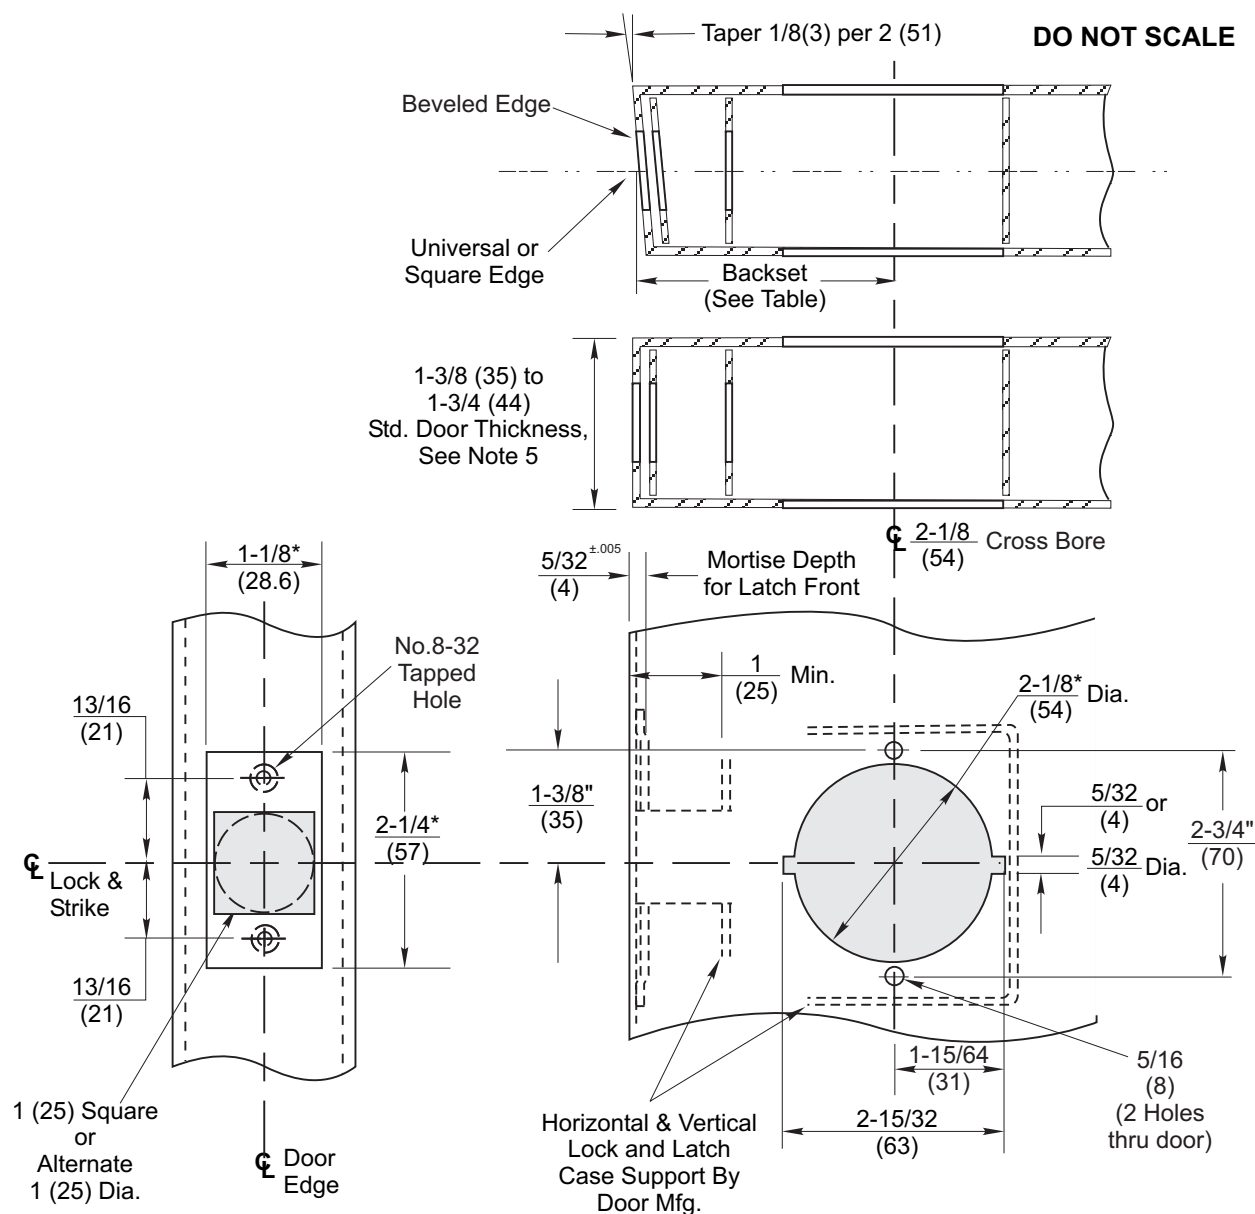

5300LN Series Lever Handle Cylindrical Locks - 1-1/8" Wide Front H.M. Door Preparation (See ANSI/BHMA A156.115) 2-3/4" and Optional Backsets

Yale

An ASSA ABLOY Group brand

www.yalecommercial.com

TEMPLATE NUMBER

7150-0066

DATE

4-08