






During "ON" hours Access Control will Open signal to Input (9). During "OFF" hours Access Control will have a Closed signal that will open with valid card read


Normally closed and common depicts the Dry output from access control

Card Reader by Others



Input 9: Security Override
Continuous contact closure of this input triggers the operator to disable Input 2 / Activation 2. This is typically used for switching off an outside wall plate.

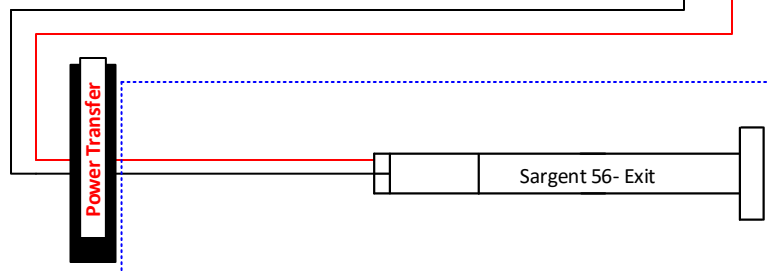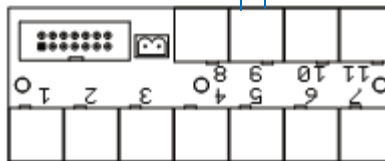

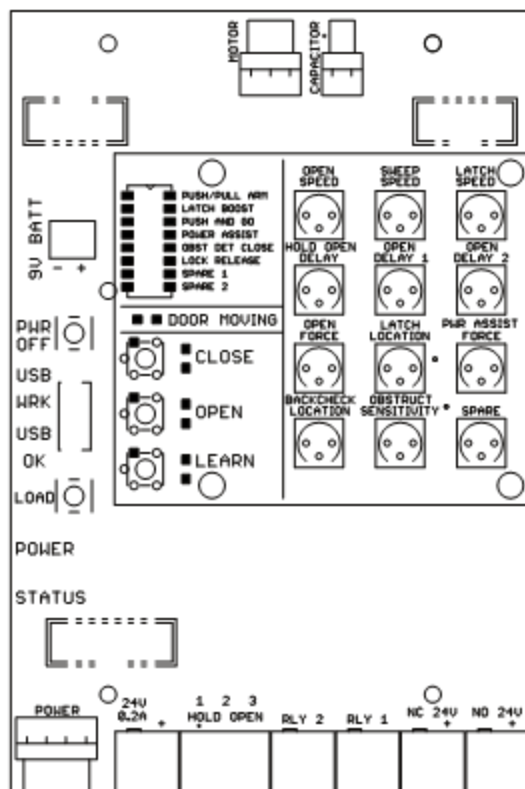

Continuous contact closure of this input triggers the operator to disable Input 2 / Activation 2. This is typically used for switching off an outside wall plate.

