



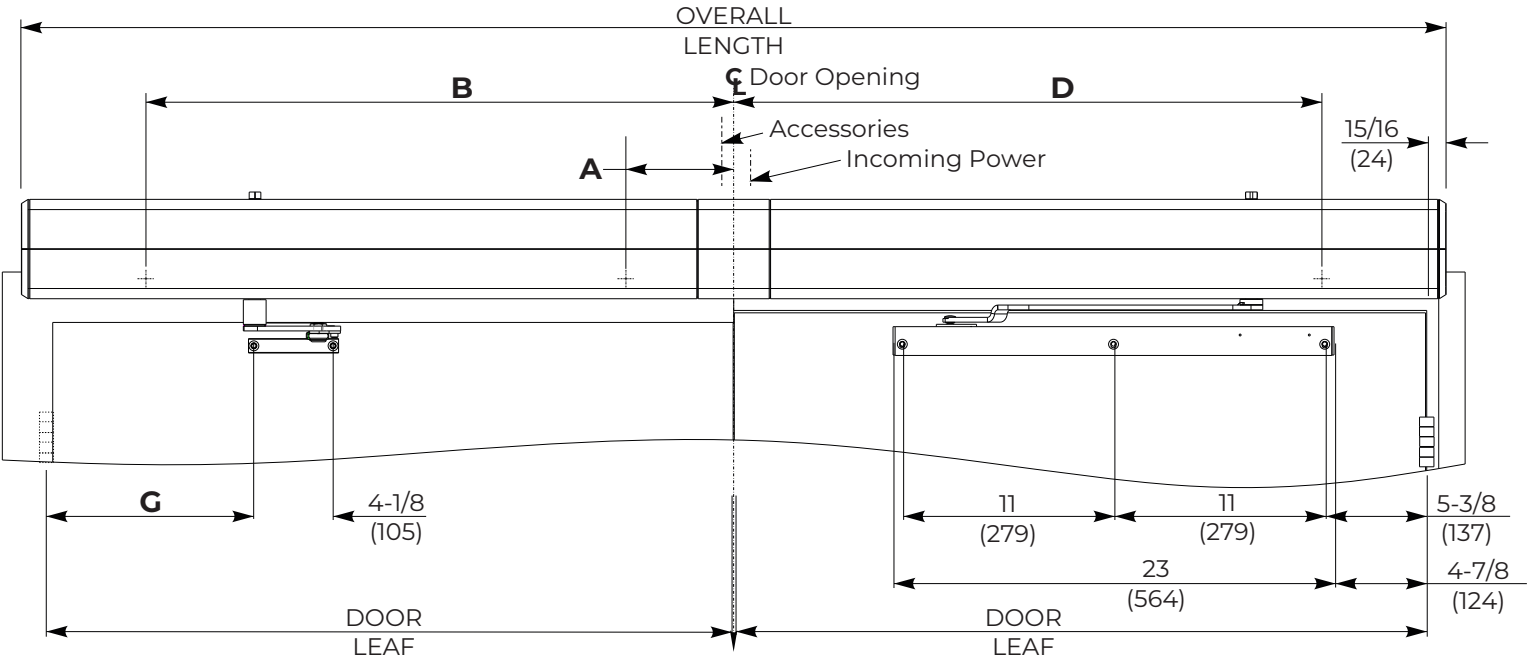

	Door Leaf Width	OAL (Overall Length)	Dim A	Dim B	Dim D
D6001DEL-36	36 (914)	74-1/4 (1886)	5-9/16 (141)	30-9/16 (776)	30-9/16 (776)
D6001DEL-38	38 (965)	78-1/4 (1988)	7-9/16 (192)	32-9/16 (827)	32-9/16 (827)
D6001DEL-40	40 (1016)	82-1/4 (2089)	9-9/16 (243)	34-9/16 (878)	34-9/16 (878)
D6001DEL-42	42 (1067)	86-1/4 (2191)	11-9/16 (294)	36-9/16 (929)	36-9/16 (929)
D6001DEL-44	44 (1118)	90-1/4 (2292)	13-9/16 (344)	38-9/16 (979)	38-9/16 (979)
D6001DEL-46	46 (1168)	94-1/4 (2394)	15-9/16 (395)	40-9/16 (1030)	40-9/16 (1017)
D6001DEL-48	48 (1219)	98-1/4 (2496)	17-9/16 (446)	42-9/16 (1081)	42-9/16 (1081)



Door Open Angle	Dim G
85°	13-1/4 (337)
90°	12-5/8 (320)
95°	12 (305)
100°	11-1/2 (292)
105°	11-1/8 (283)
110°	10-3/4 (273)

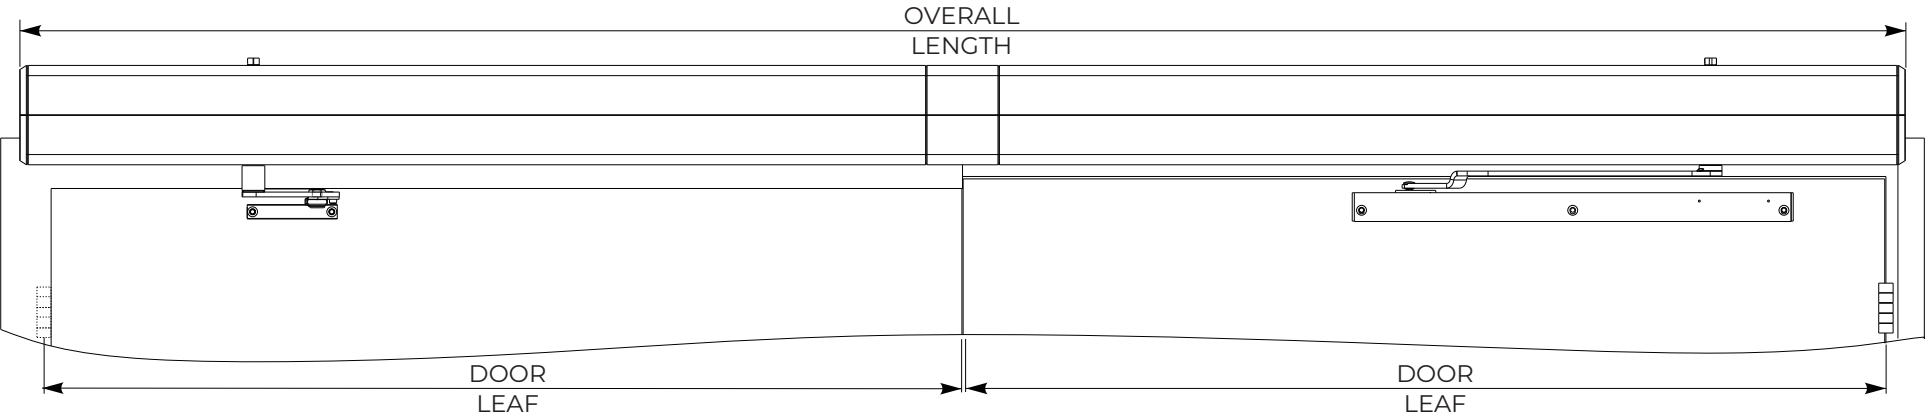

- NOTES:**
- Dimensions shown in inches / (mm) unless specified otherwise.
 - Electrical requirements:
 - Power input of 120VAC, 5Amp minimum
 - Accessories circuit for activation to operator and low voltage
 - For initial set up, doors must be un-latched and free to move
 - For additional installation instructions, see instruction sheet 80-9360-1048-020. Visit www.NortonRixson.com
 - Refer to page 2 for proper handling of product


This application uses the 6051-1L arm and track for the Pull Side door and 6061-1 arm assembly for the Push Side door

D6001DEL Series Template
shown on pairs of 36", 38", 40", 42", 44", 46", and 48" frames shown with up to 5" Butt Hinges
Reveal of up to 3" (76) on Pull and Push Side with a Maximum Opening of 110°

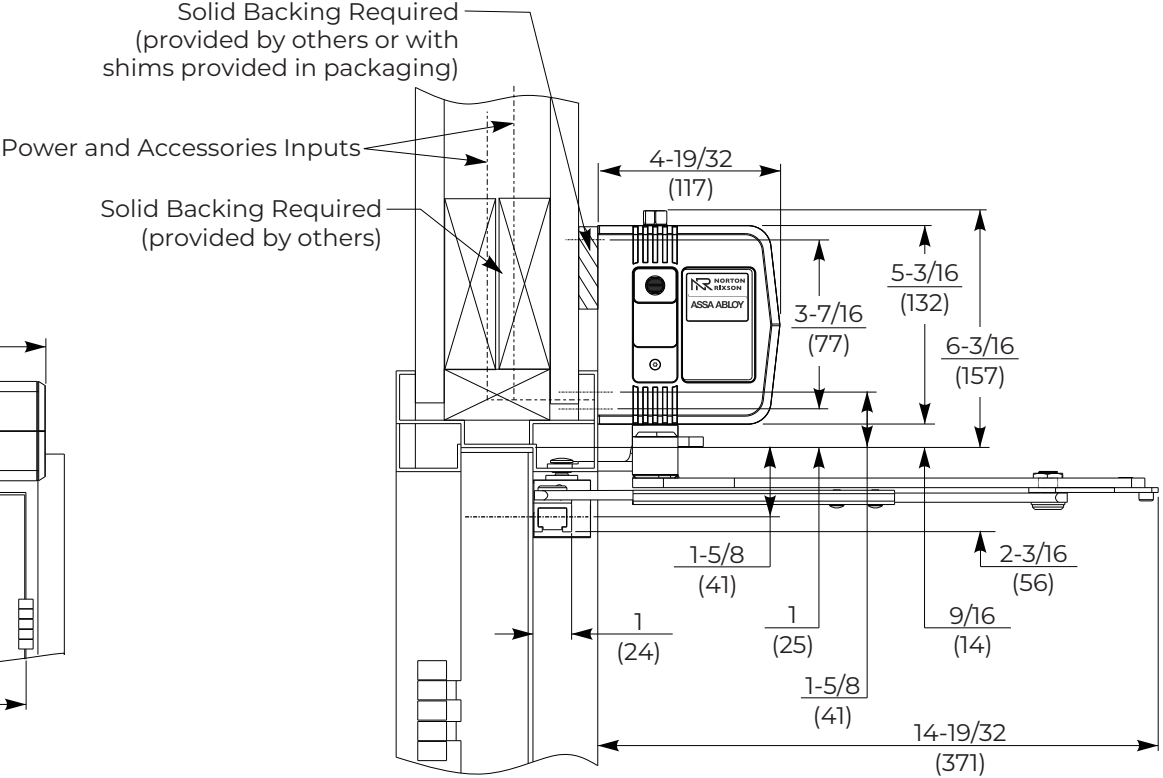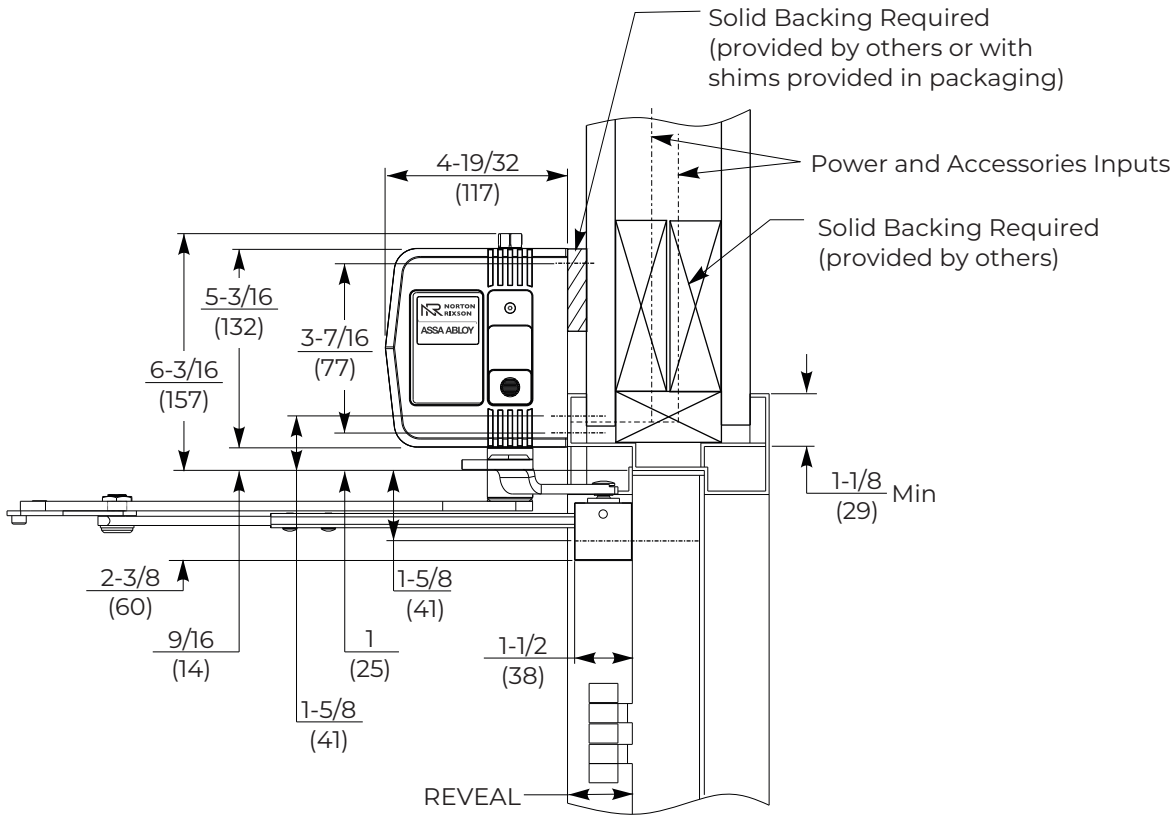






Single Pull Side

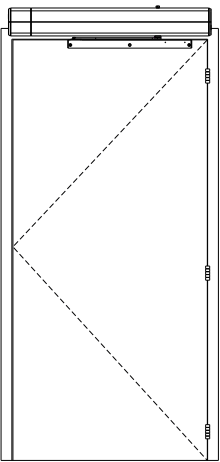



NOTE:
- All illustrations on this page
shown with 36" (914mm) wide
doors

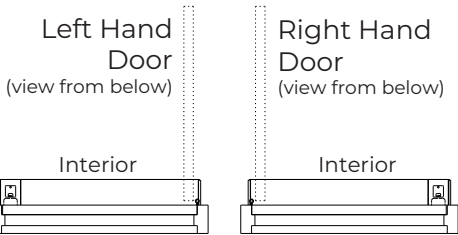



Double Door Pull Side

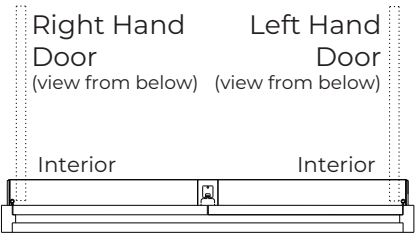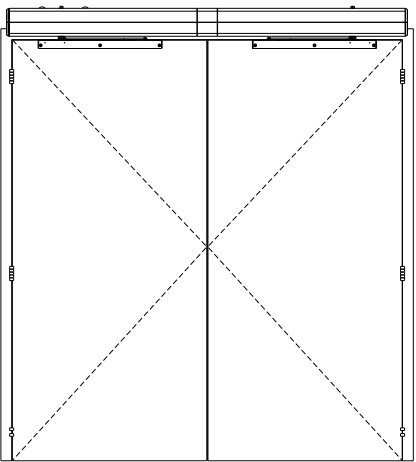



Double Door Double Egress Left Hand

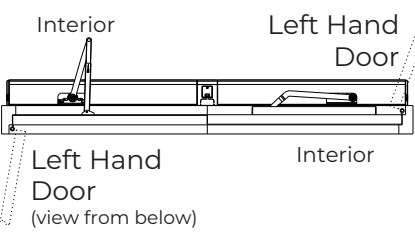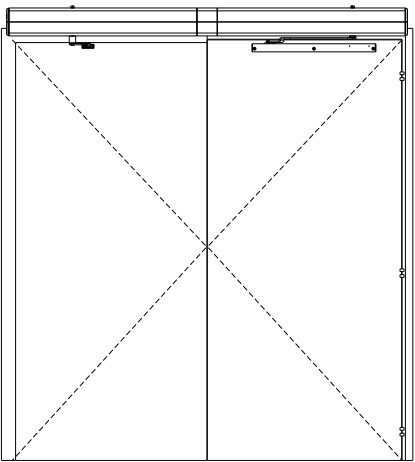



Single Push Side

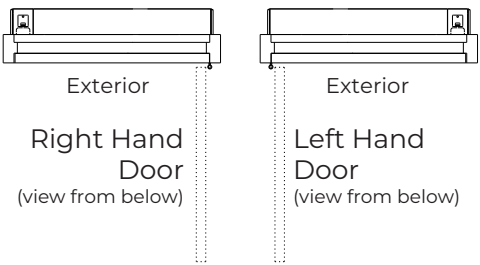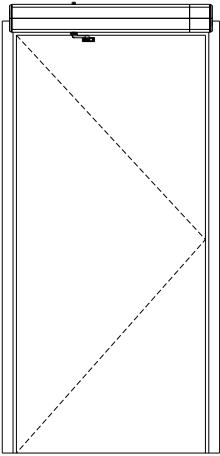

Double Door Push Side

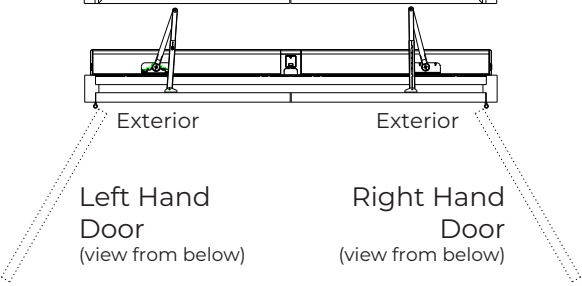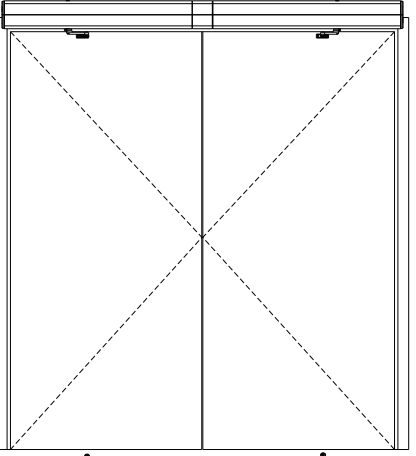

Double Door Double Egress Right Hand

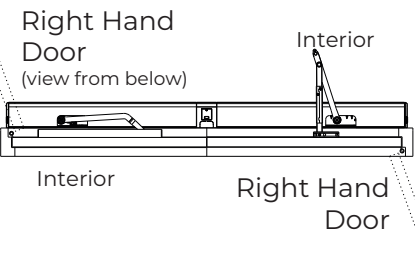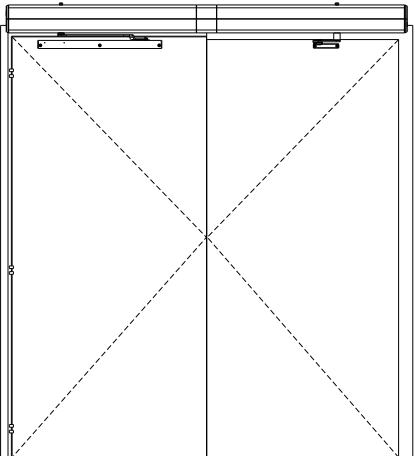



D6001DEL Series Template
shown on pairs of 36", 38", 40", 42", 44", 46", and 48" frames shown
with up to 5" Butt Hinges
Reveal of up to 3" (76) on Pull and Push Side with a Maximum Opening of 110°

Page 2



TEMPLATE NUMBER	REV	DATE
7360-1058	2	05/23

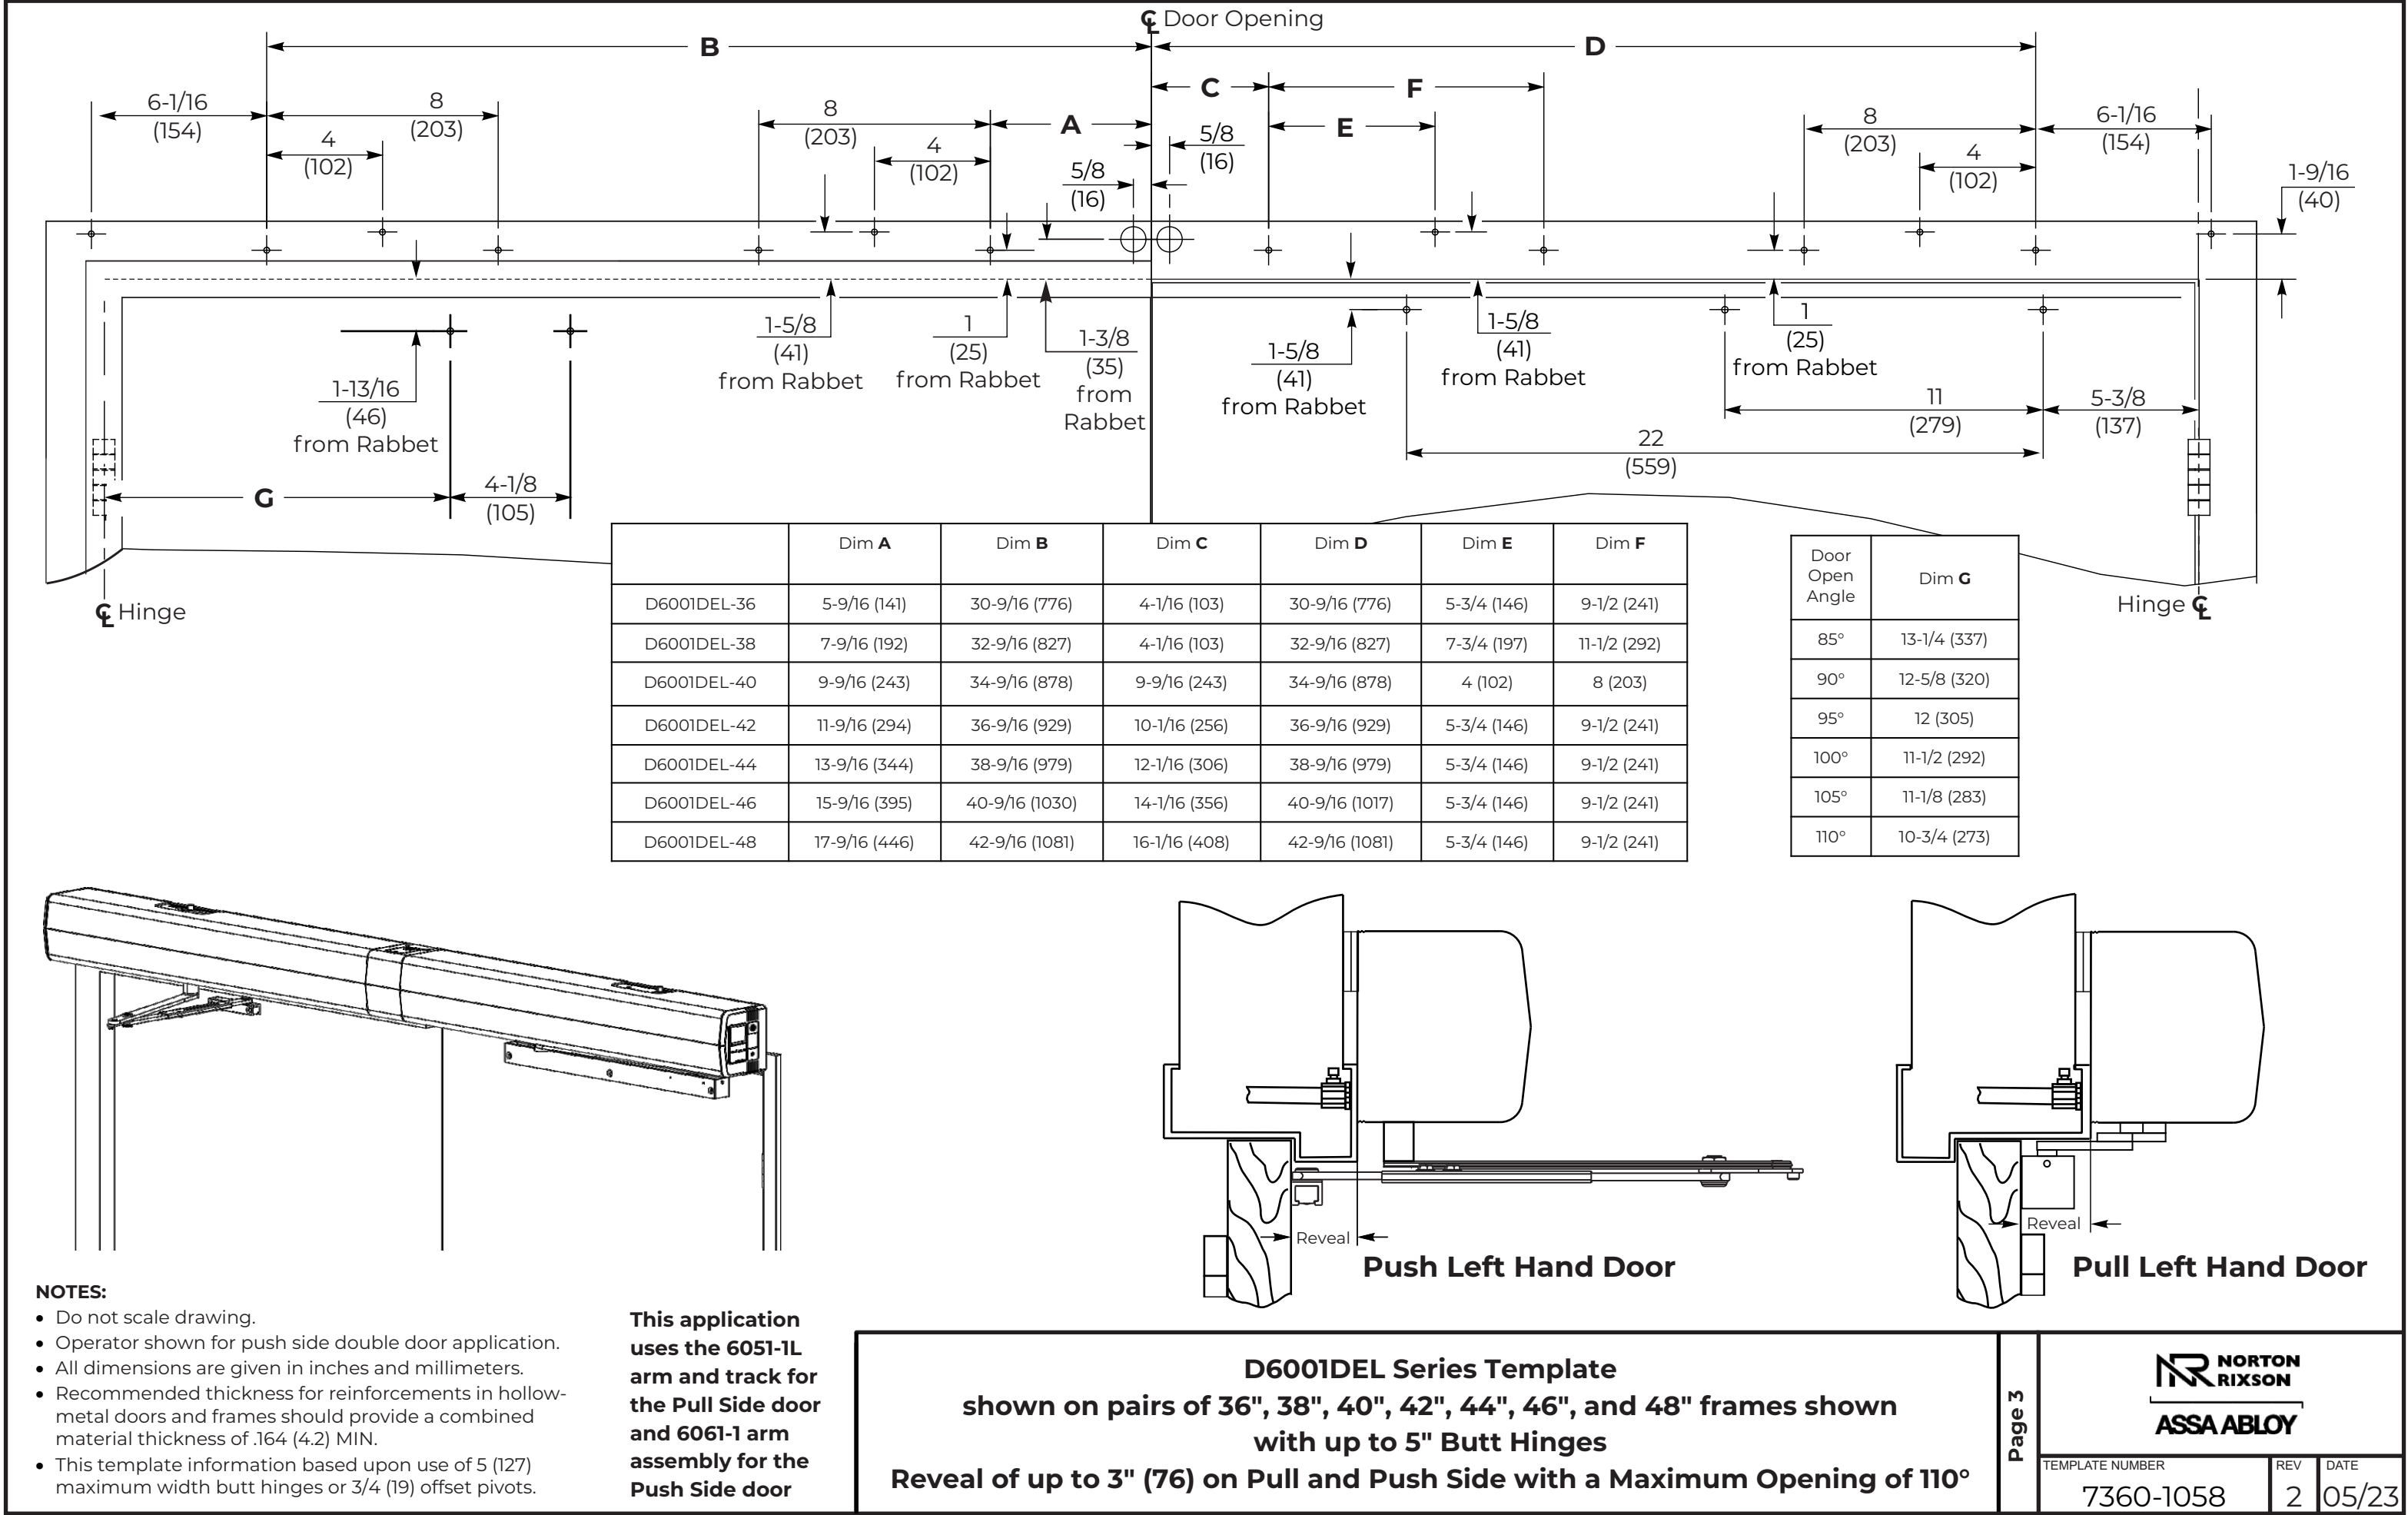

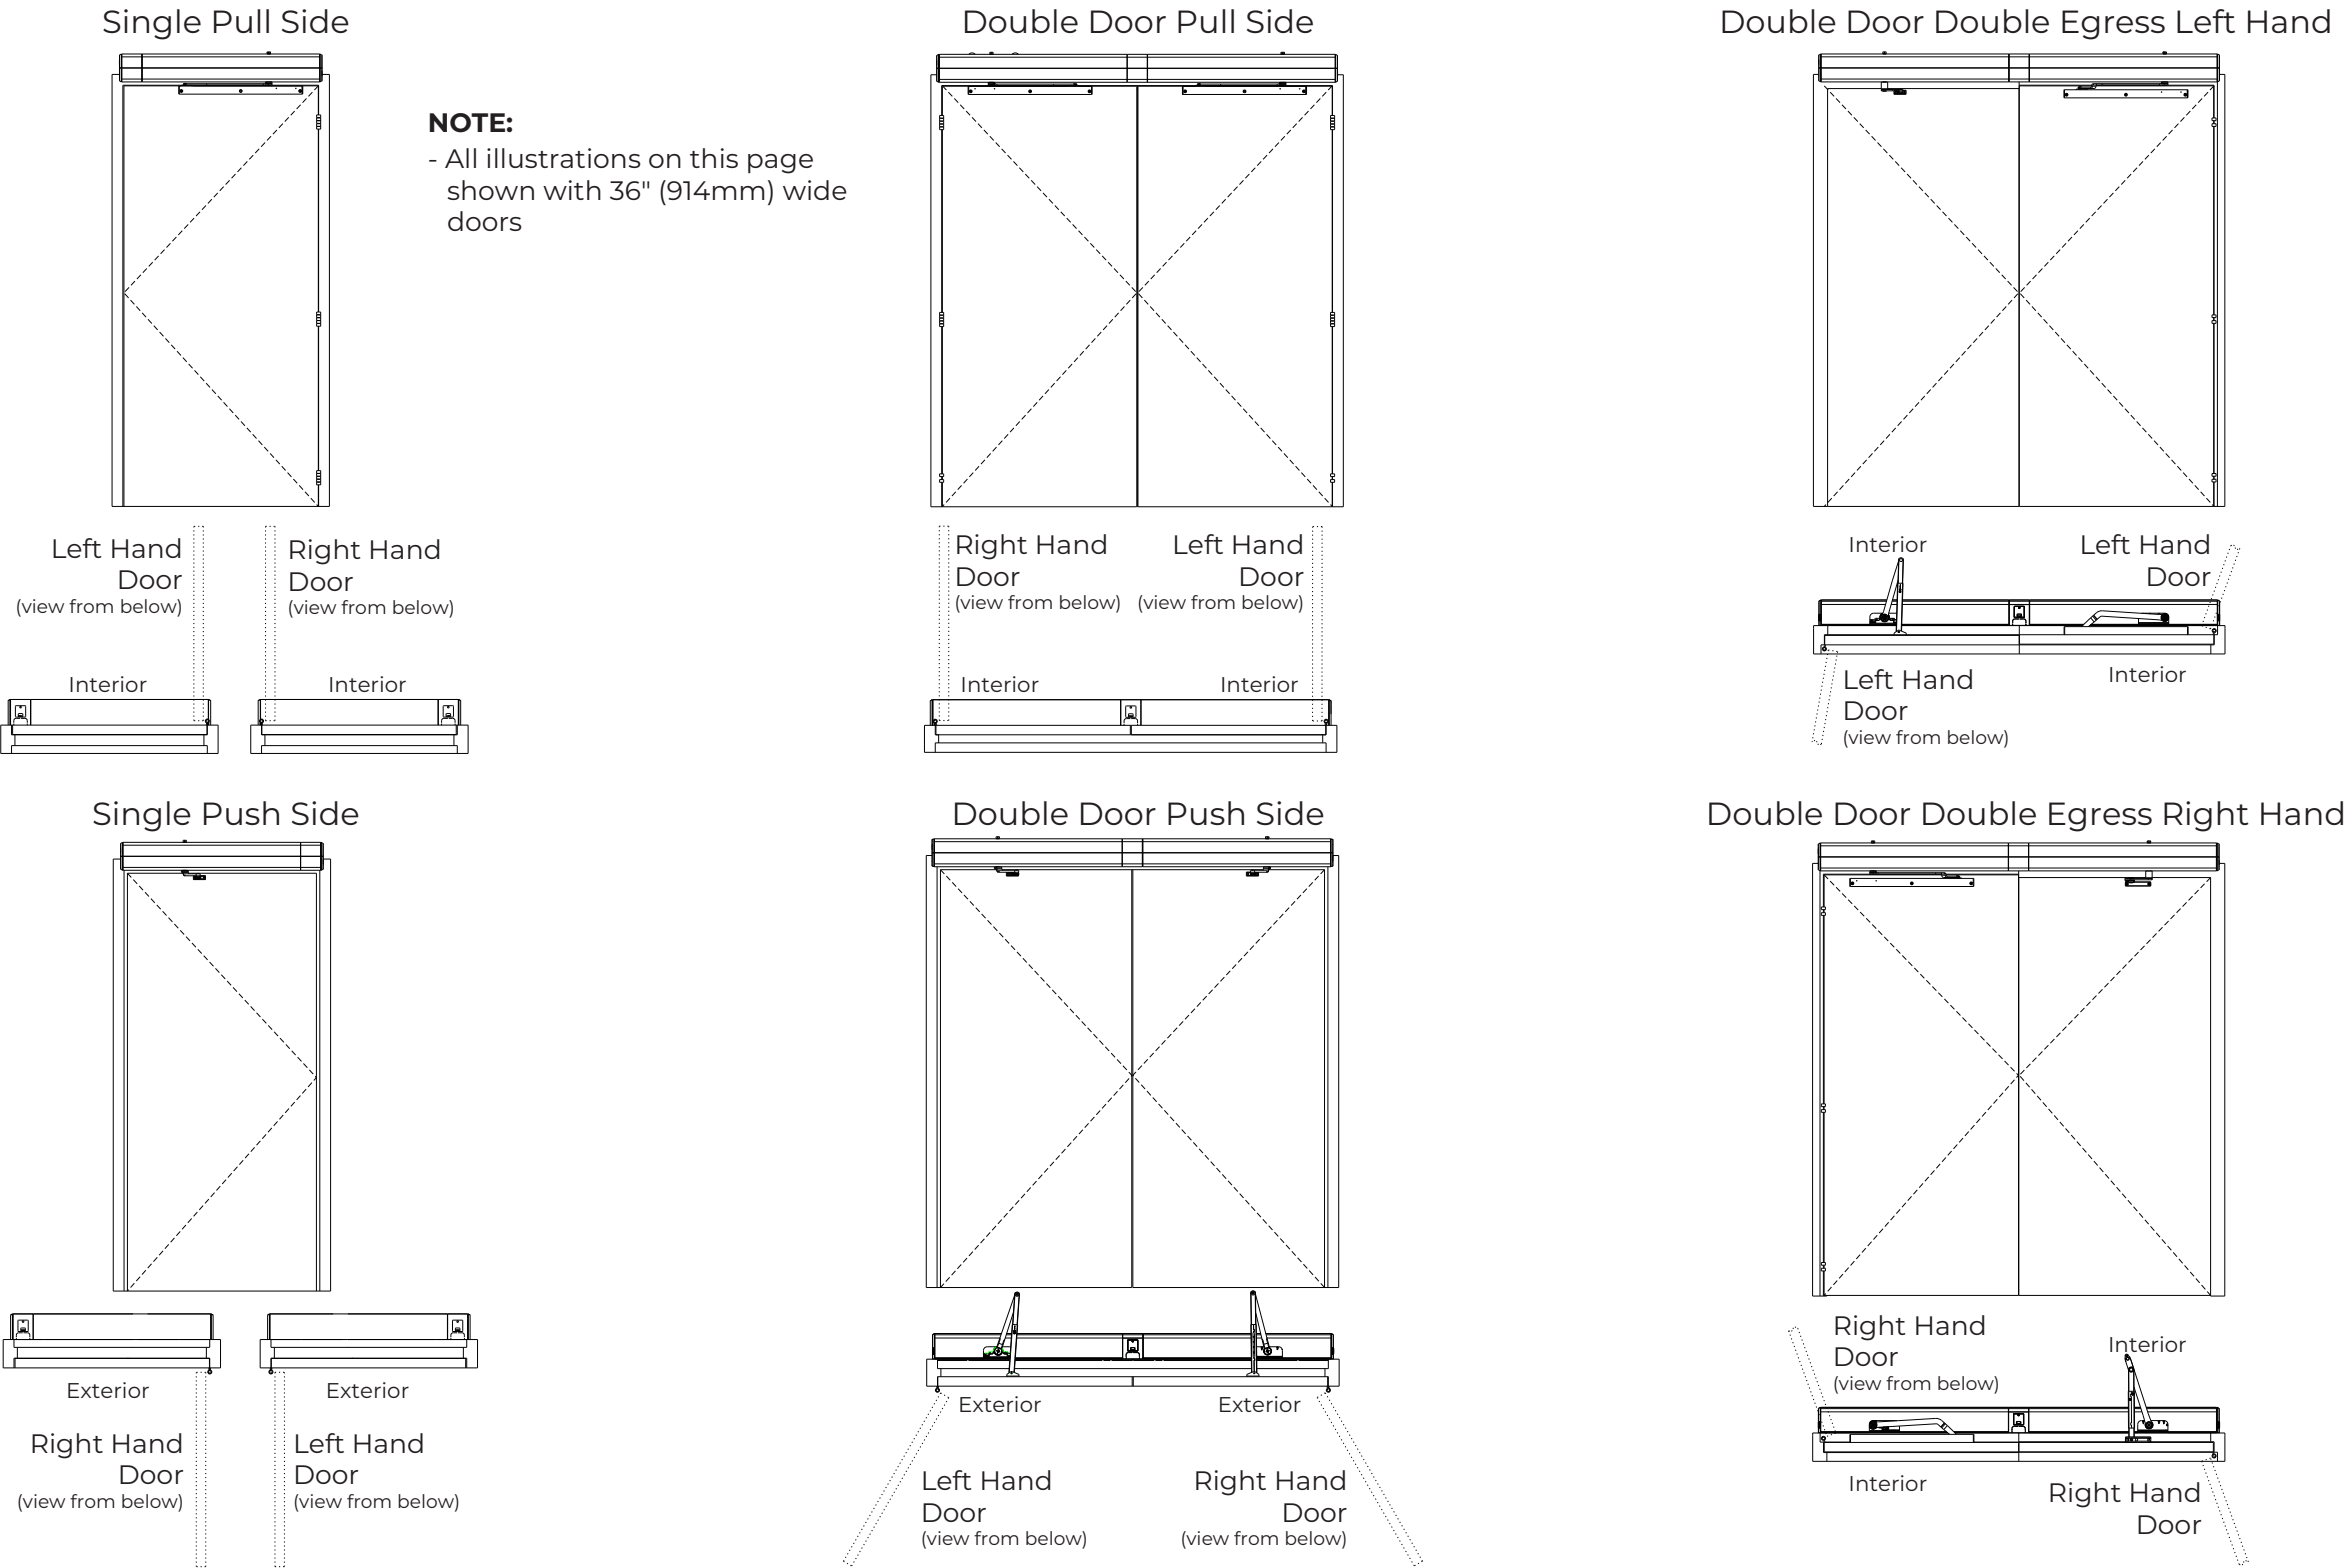


NOTE:
- All illustrations on this page
shown with 36" (914mm) wide
doors

D6001DEL2 Series Template
shown on pairs of 36", 38", 40", 42", 44", 46" and 48" frames
shown with up to 5" Butt Hinges
Reveal of 4-3/4" (121) to 7-3/8" (187) on Push and Pull sides
Maximum Opening of 100°

Page 2




TEMPLATE NUMBER	REV	DATE
7360-1062	2	05/23

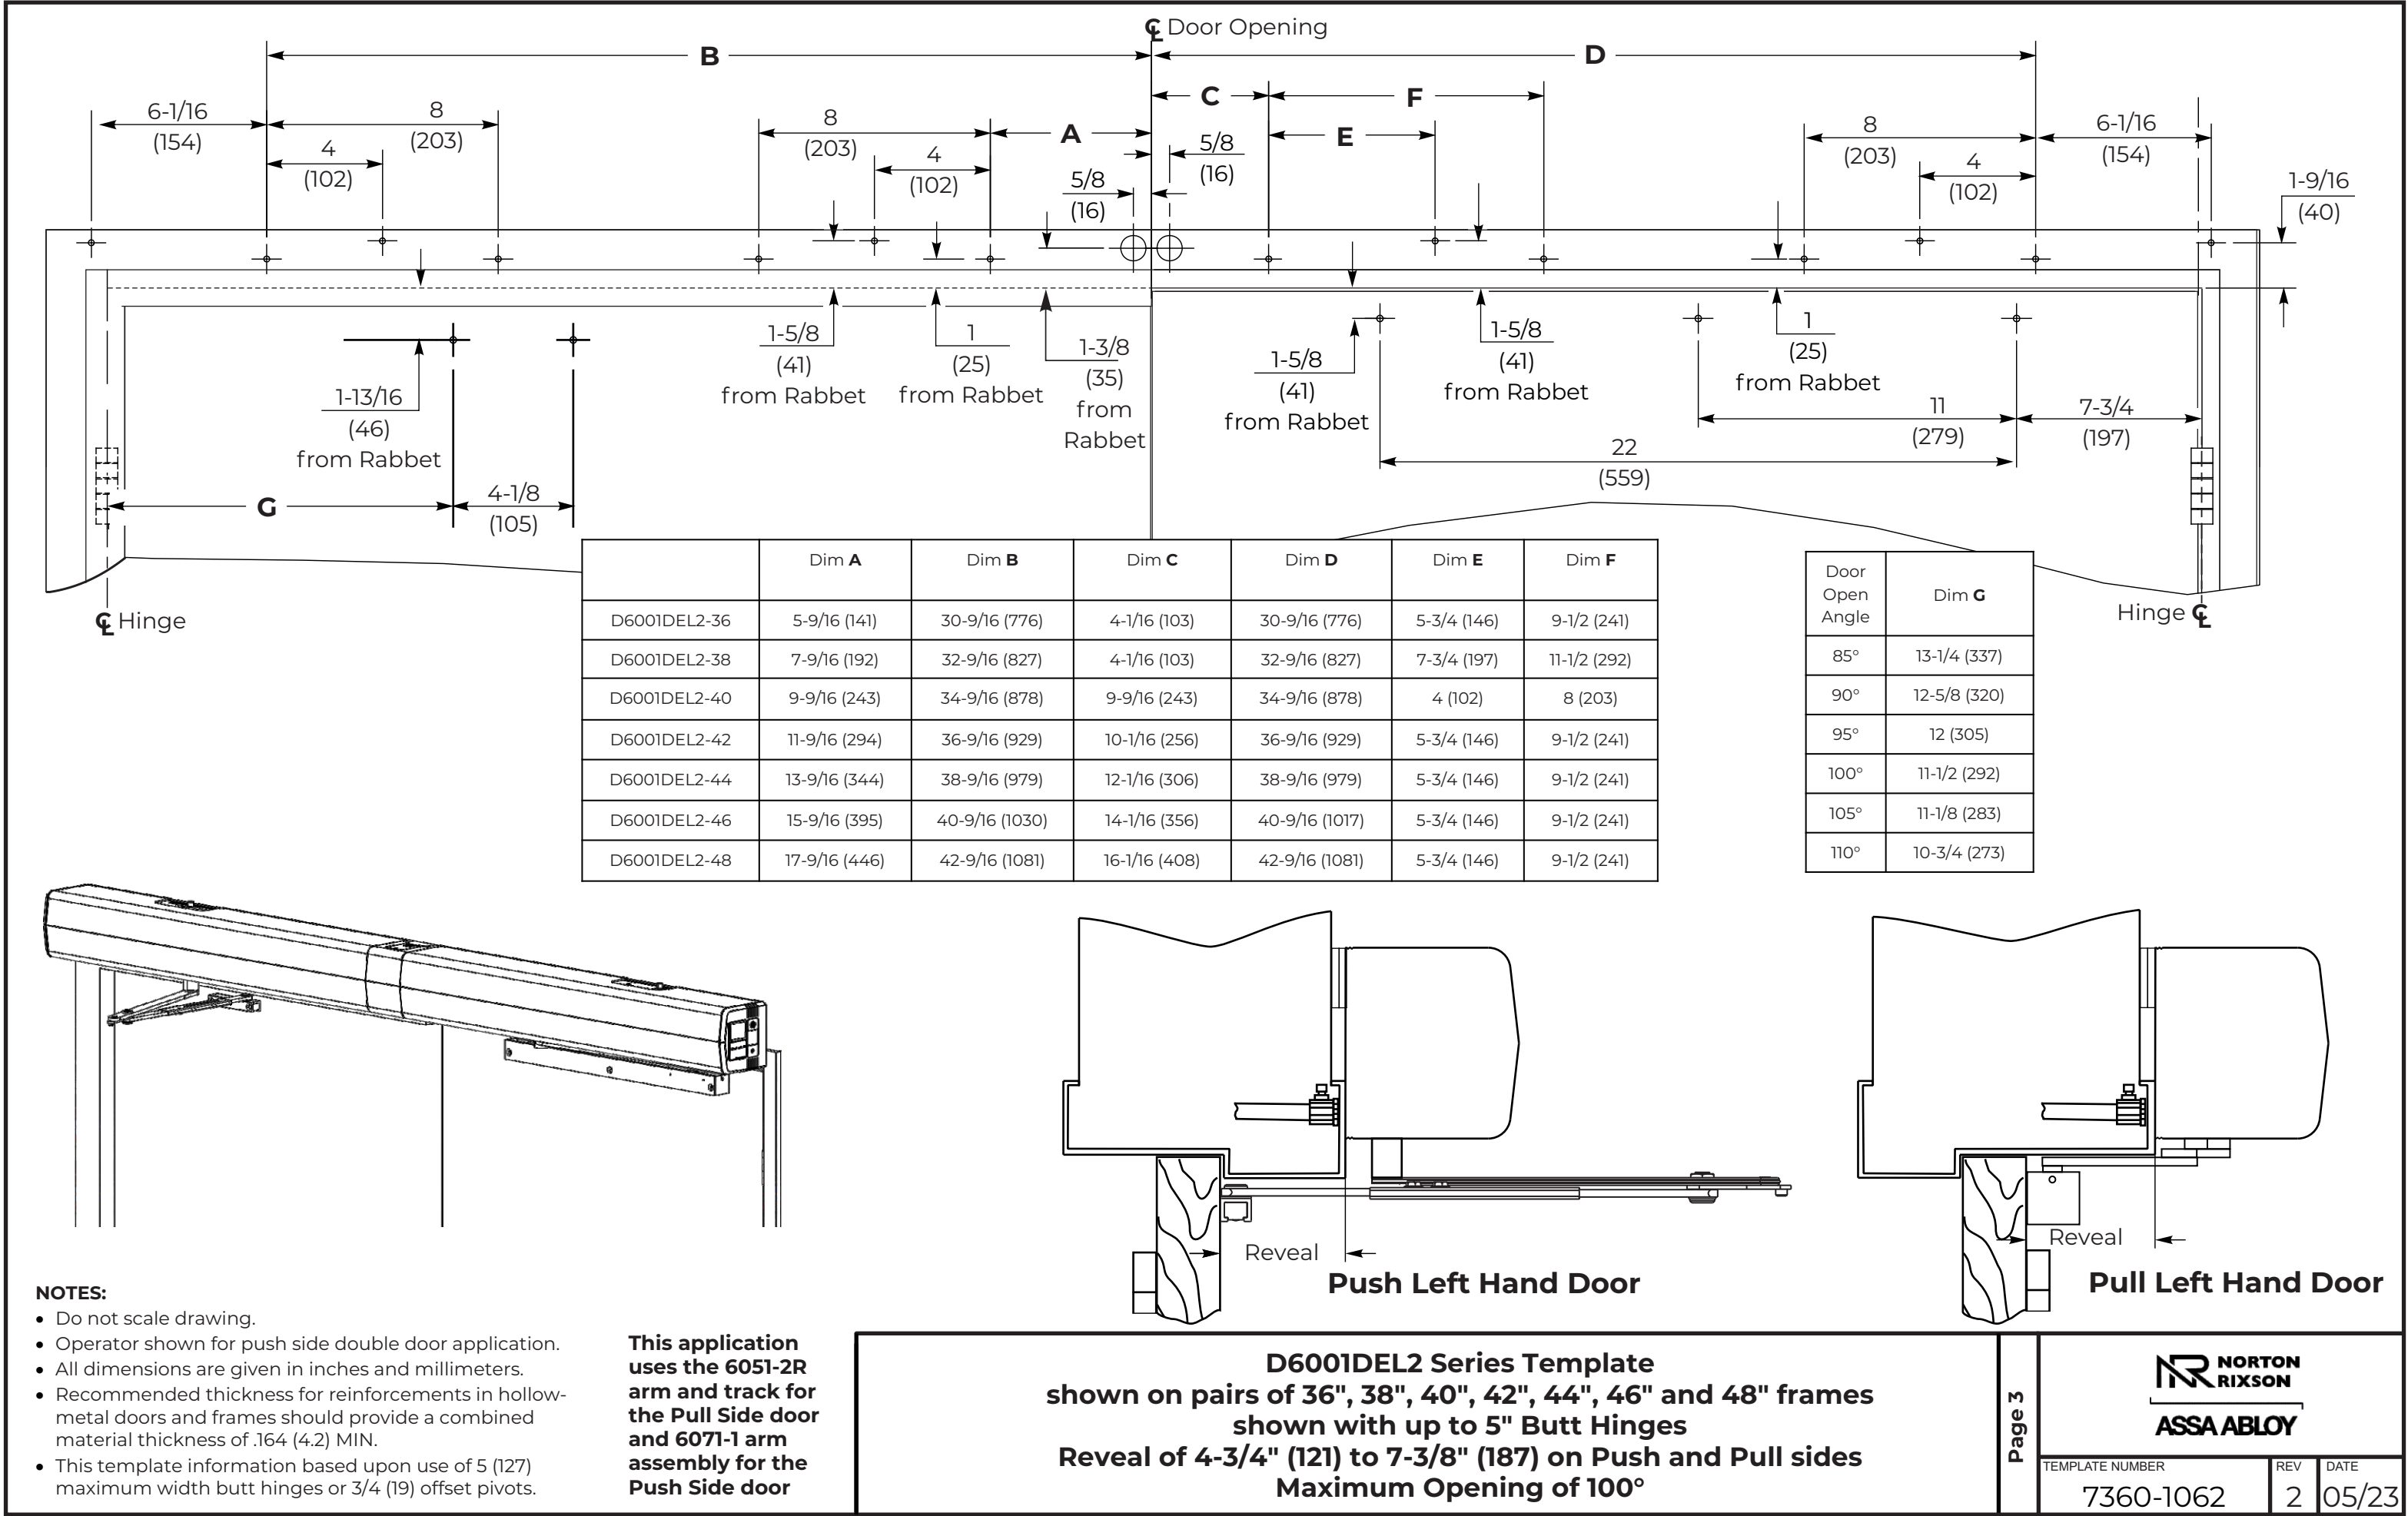




TRADEMARK
HARDWARE

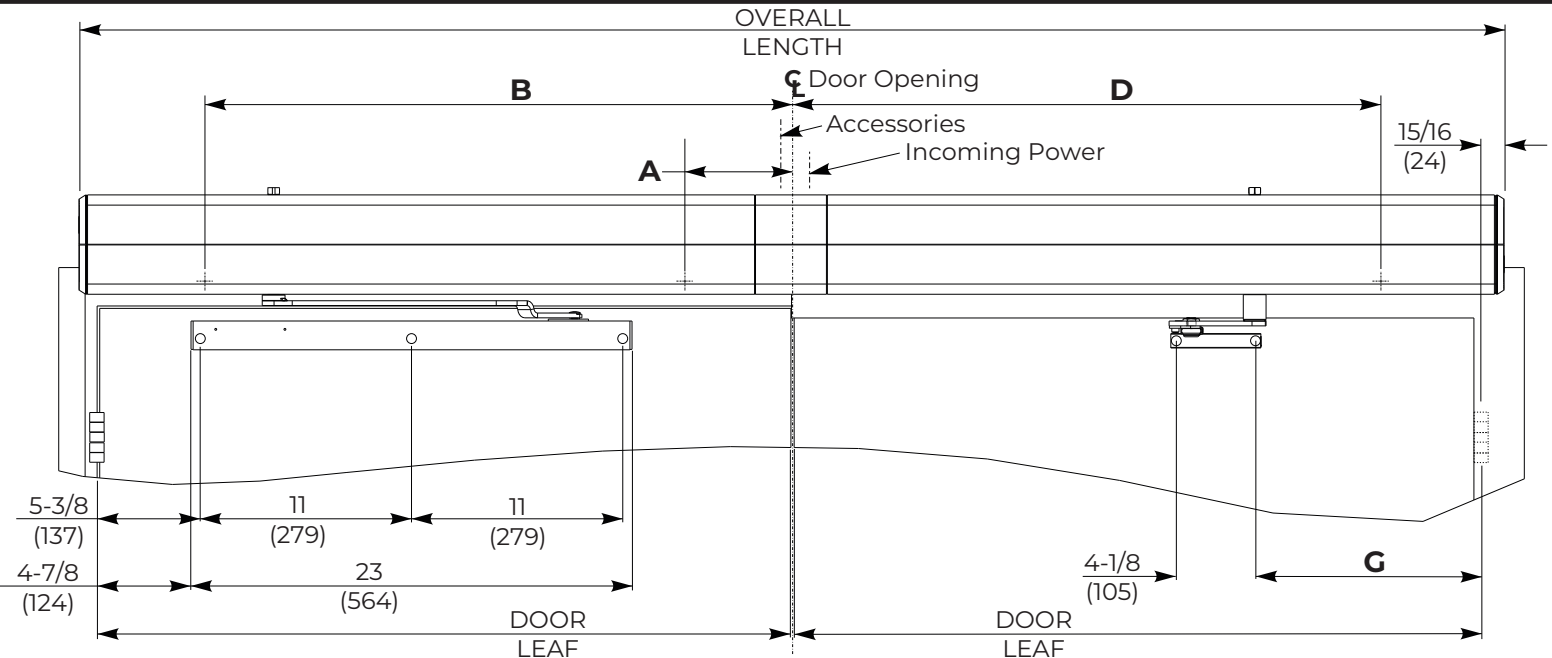

	Door Leaf Width	OAL (Overall Length)	Dim A	Dim B	Dim D
D600IDER-36	36 (914)	74-1/4 (1886)	5-9/16 (141)	30-9/16 (776)	30-9/16 (776)
D600IDER-38	38 (965)	78-1/4 (1988)	7-9/16 (192)	32-9/16 (827)	32-9/16 (827)
D600IDER-40	40 (1016)	82-1/4 (2089)	9-9/16 (243)	34-9/16 (878)	34-9/16 (878)
D600IDER-42	42 (1067)	86-1/4 (2191)	11-9/16 (294)	36-9/16 (929)	36-9/16 (929)
D600IDER-44	44 (1118)	90-1/4 (2292)	13-9/16 (344)	38-9/16 (979)	38-9/16 (979)
D600IDER-46	46 (1168)	94-1/4 (2394)	15-9/16 (395)	40-9/16 (1030)	40-9/16 (1017)
D600IDER-48	48 (1219)	98-1/4 (2496)	17-9/16 (446)	42-9/16 (1081)	42-9/16 (1081)

Door Open Angle	Dim G
85°	13-1/4 (337)
90°	12-5/8 (320)
95°	12 (305)
100°	11-1/2 (292)
105°	11-1/8 (283)
110°	10-3/4 (273)

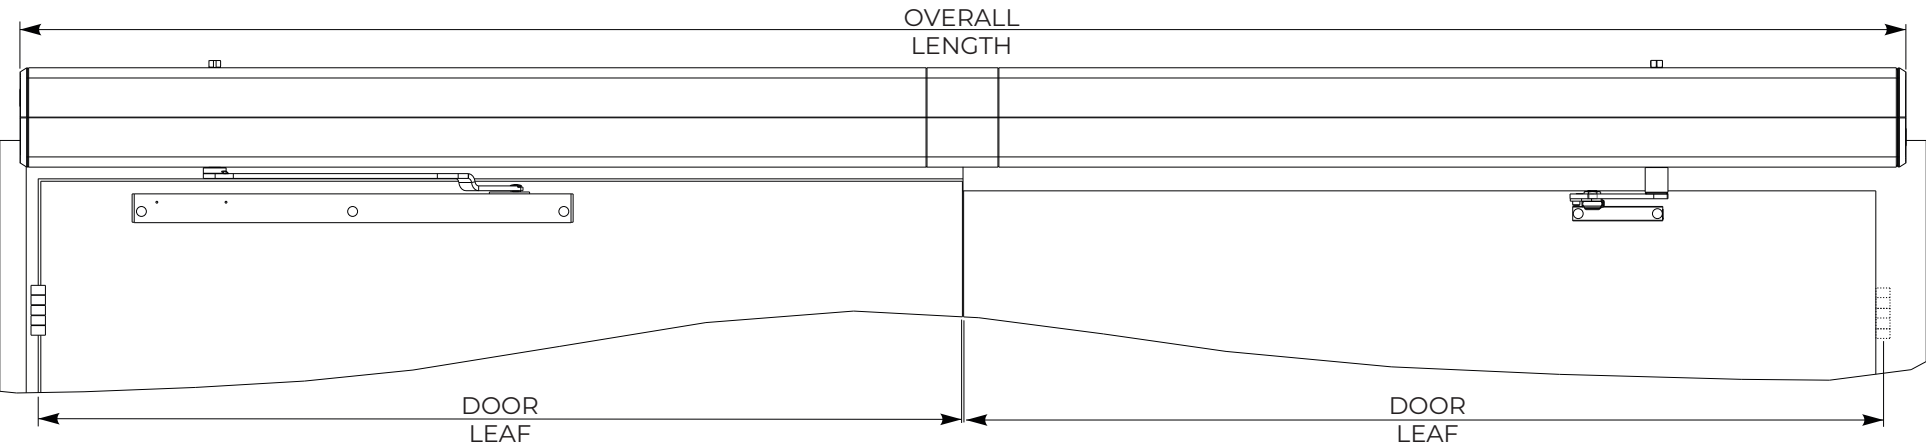

NOTES:

- Dimensions shown in inches / (mm) unless specified otherwise.
- Electrical requirements:
 - Power input of 120VAC, 5Amp minimum
 - Accessories circuit for activation to operator and low voltage
- For initial set up, doors much be un-latched and free to move
- For additional installation instructions, see instruction sheet 80-9360-1047-020. Visit www.NortonRixson.com
- Refer to page 2 for proper handling of product

This application uses the 6051-1R arm and track for the Pull Side door and 6061-1 arm assembly for the Push Side door

D600IDER Series Template

shown on pairs of 36", 38", 40", 42", 44", 46" and 48" frames

shown with up to 5" Butt Hinges


Reveal of up to 3" (76) on Push and Pull sides with a Maximum Opening of 110°

Page 1





ASSA ABLOY


TEMPLATE NUMBER	REV	DATE
7360-1057	2	05/23

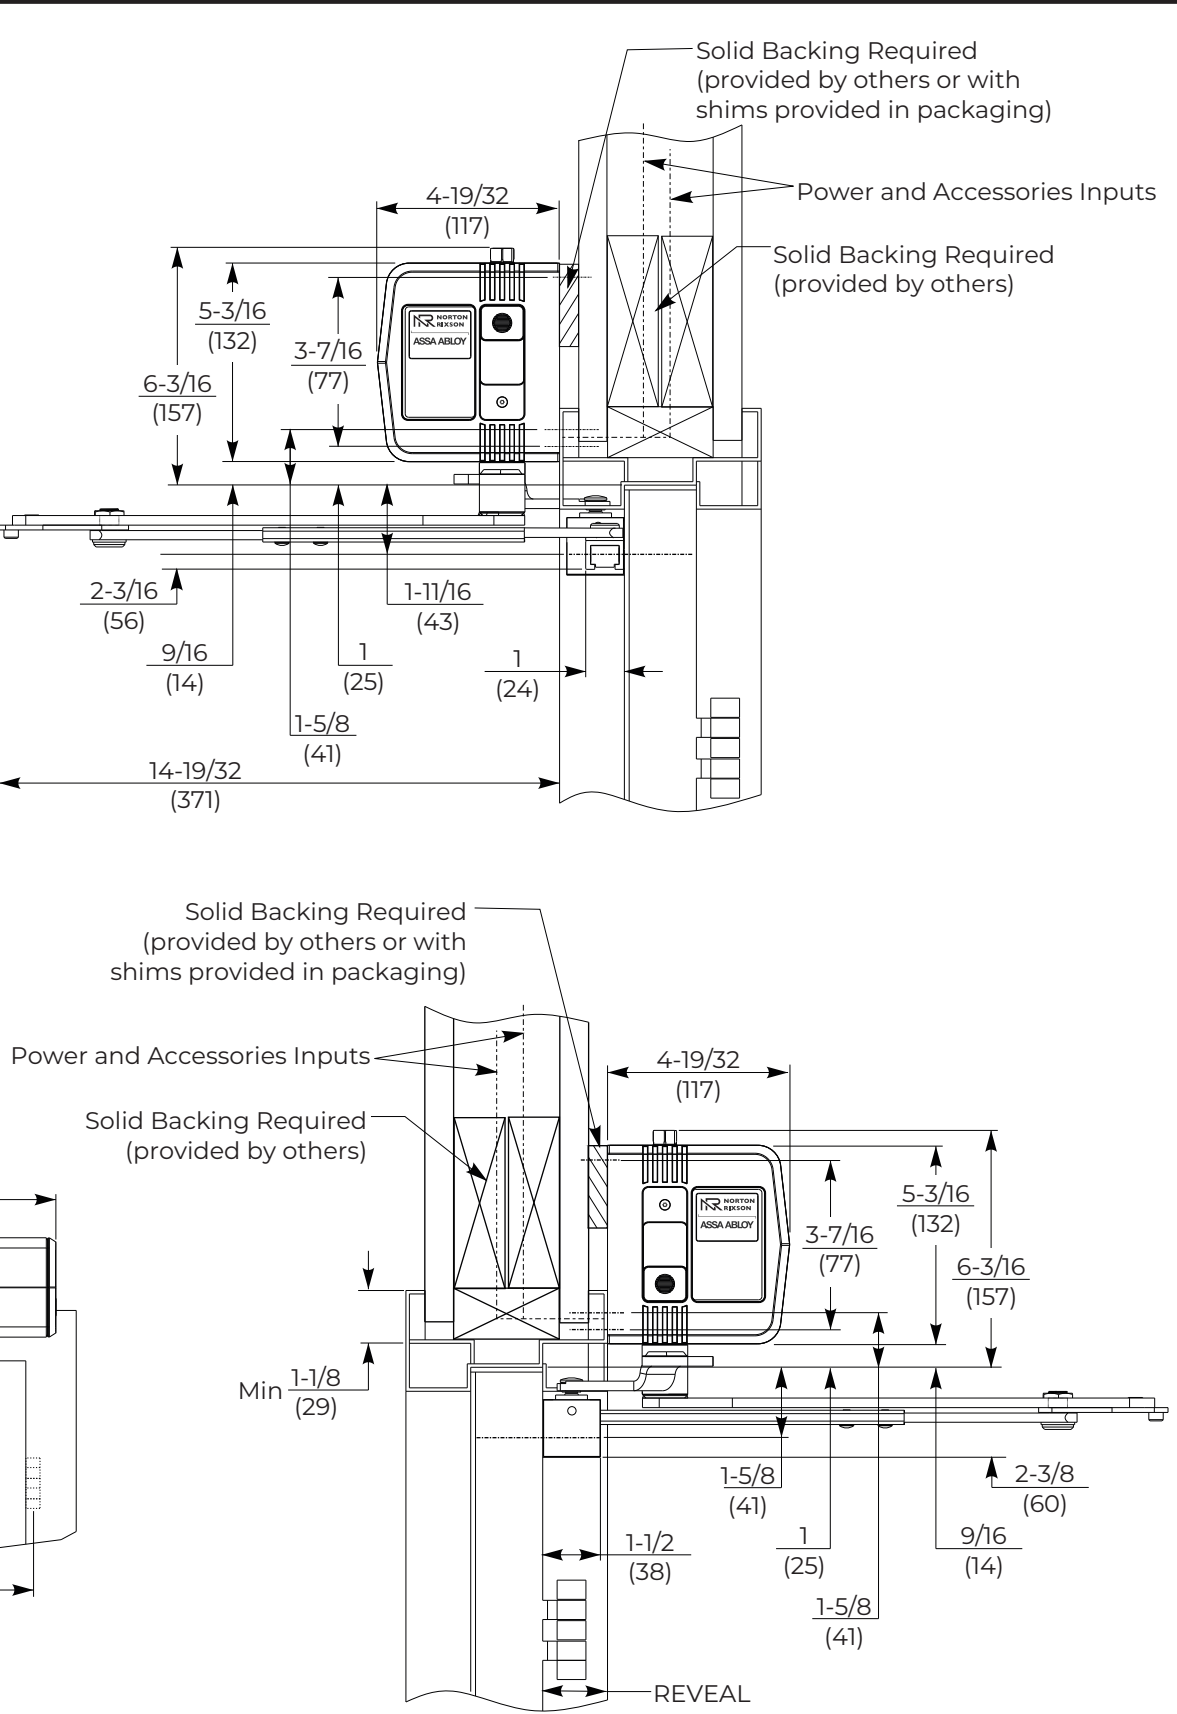

Approved 2023-07-12

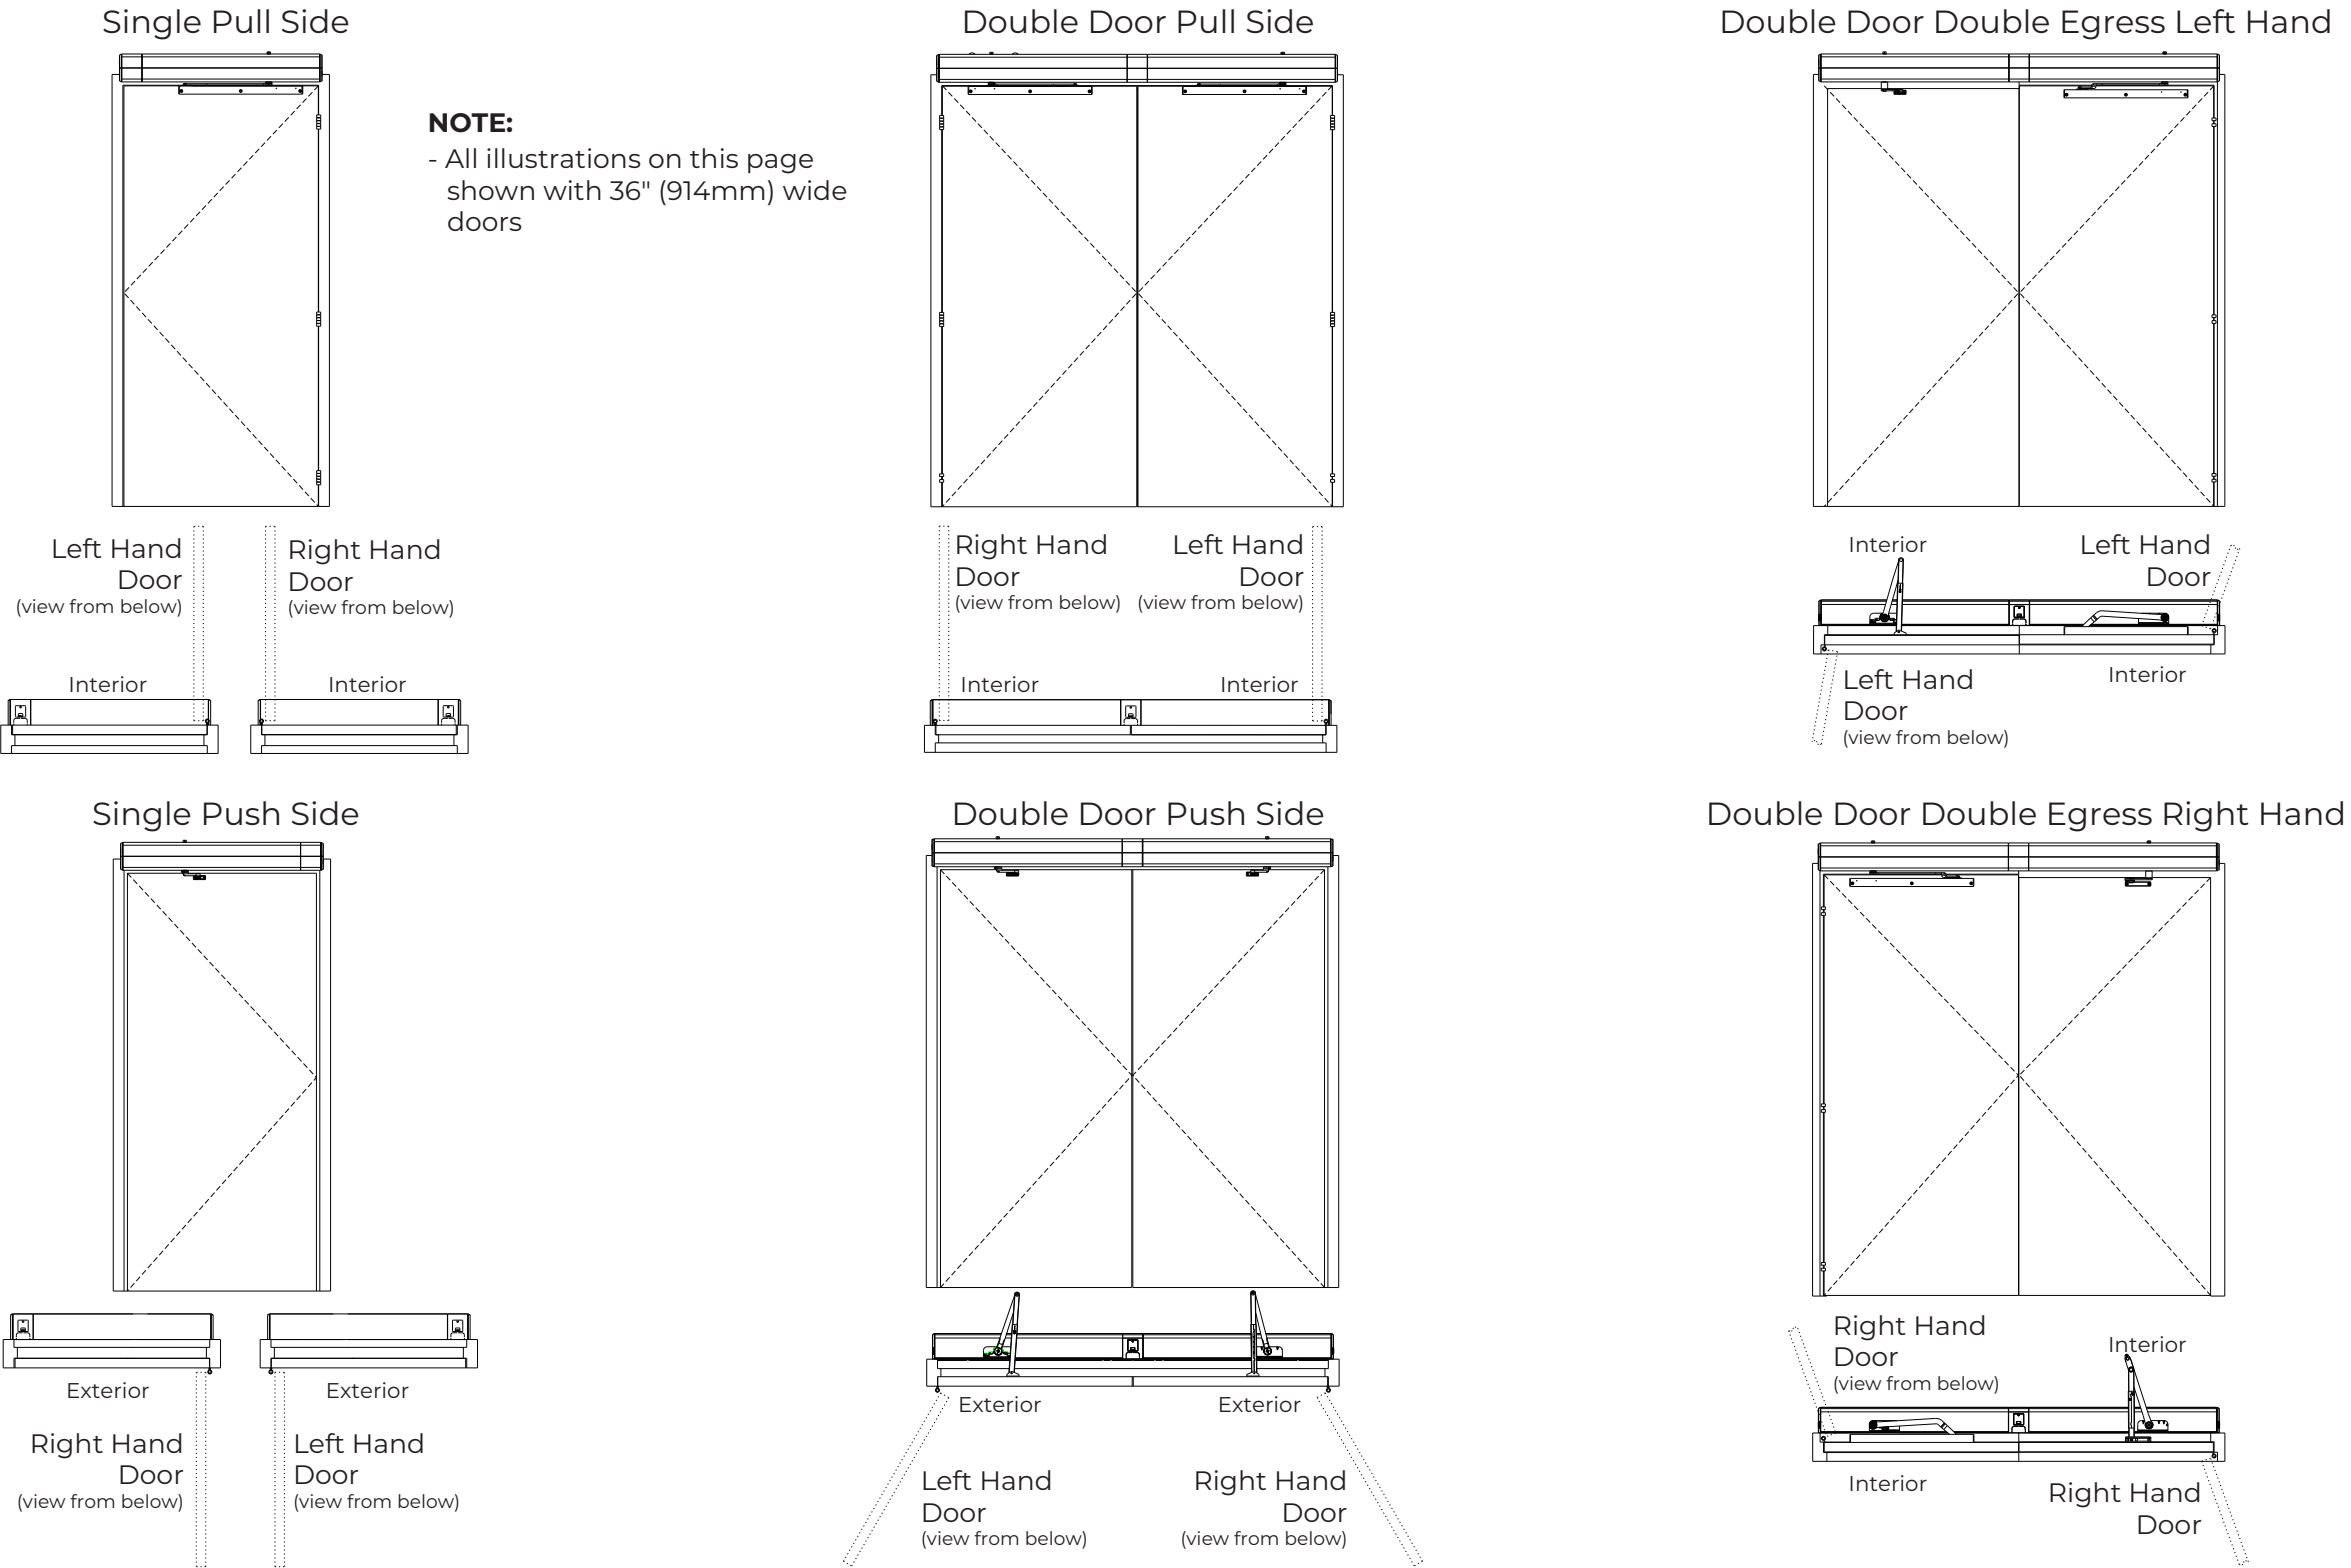


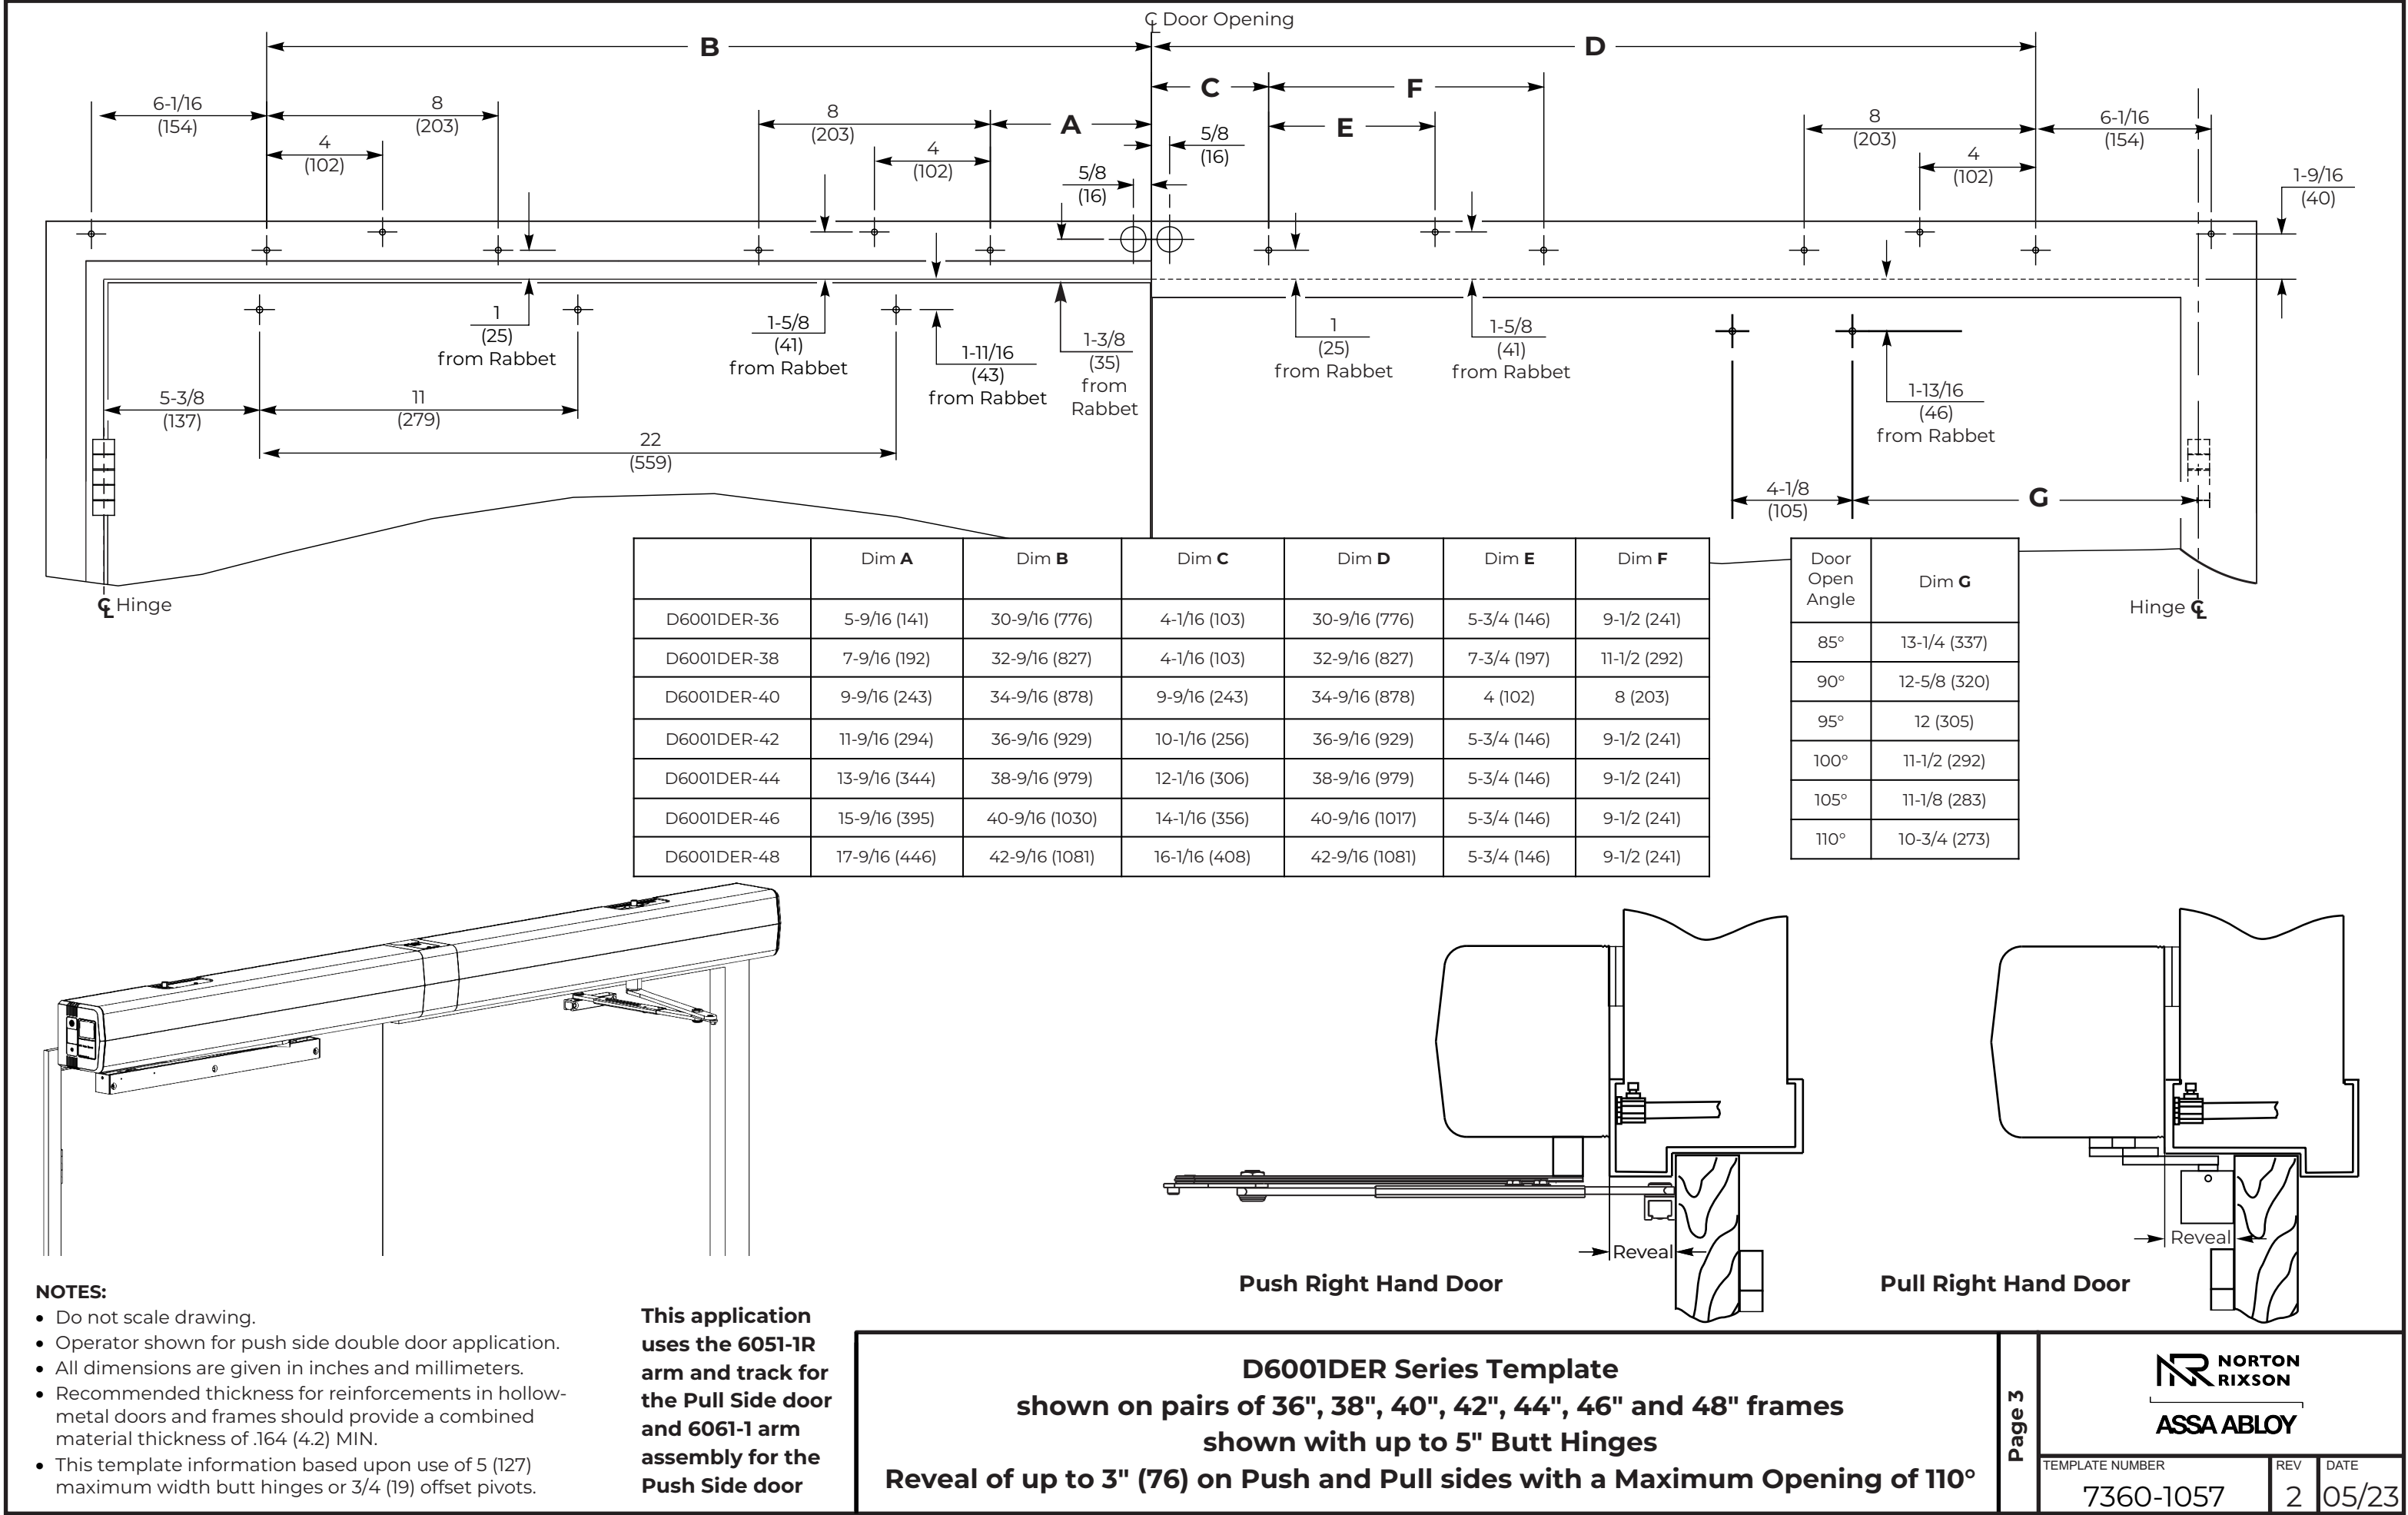

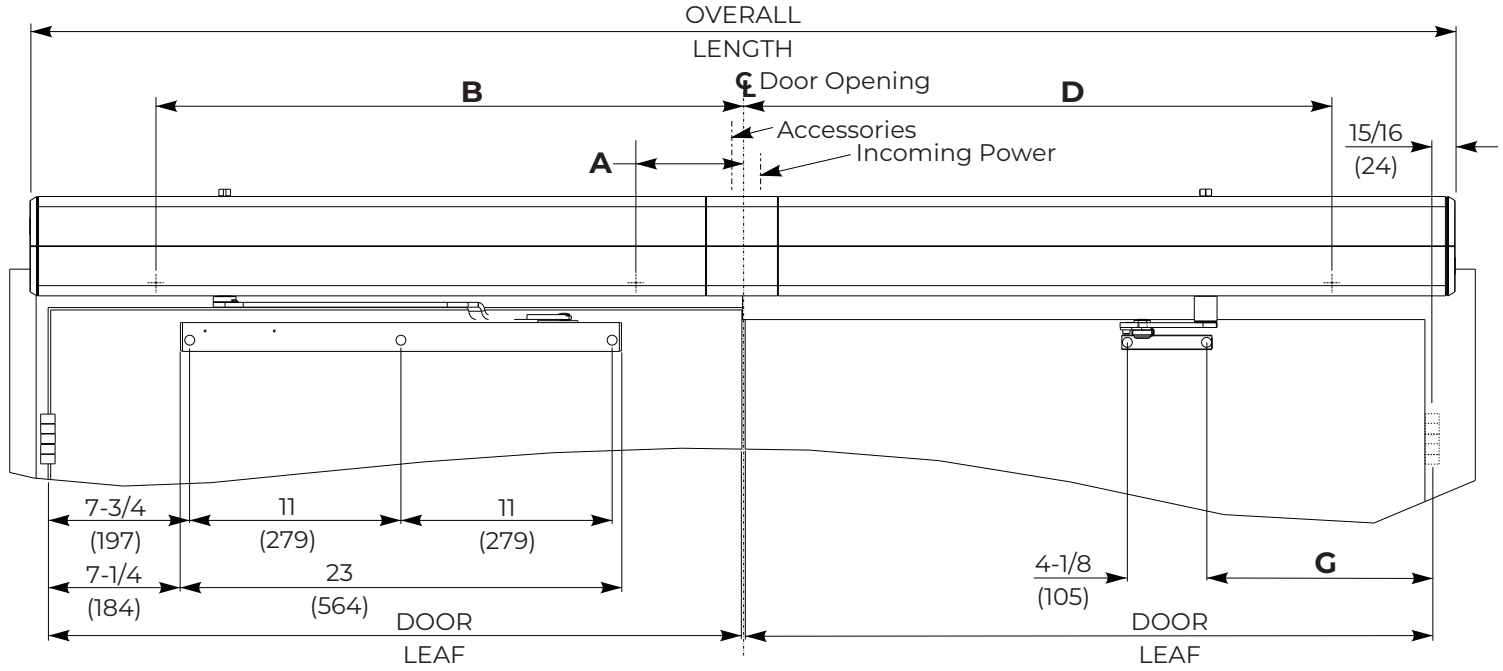

	Door Leaf Width	OAL (Overall Length)	Dim A	Dim B	Dim D
D6001DER2-36	36 (914)	74-1/4 (1886)	5-9/16 (141)	30-9/16 (776)	30-9/16 (776)
D6001DER2-38	38 (965)	78-1/4 (1988)	7-9/16 (192)	32-9/16 (827)	32-9/16 (827)
D6001DER2-40	40 (1016)	82-1/4 (2089)	9-9/16 (243)	34-9/16 (878)	34-9/16 (878)
D6001DER2-42	42 (1067)	86-1/4 (2191)	11-9/16 (294)	36-9/16 (929)	36-9/16 (929)
D6001DER2-44	44 (1118)	90-1/4 (2292)	13-9/16 (344)	38-9/16 (979)	38-9/16 (979)
D6001DER2-46	46 (1168)	94-1/4 (2394)	15-9/16 (395)	40-9/16 (1030)	40-9/16 (1017)
D6001DER2-48	48 (1219)	98-1/4 (2496)	17-9/16 (446)	42-9/16 (1081)	42-9/16 (1081)

Door Open Angle	Dim G
85°	13-1/4 (337)
90°	12-5/8 (320)
95°	12 (305)
100°	11-1/2 (292)
105°	11-1/8 (283)
110°	10-3/4 (273)

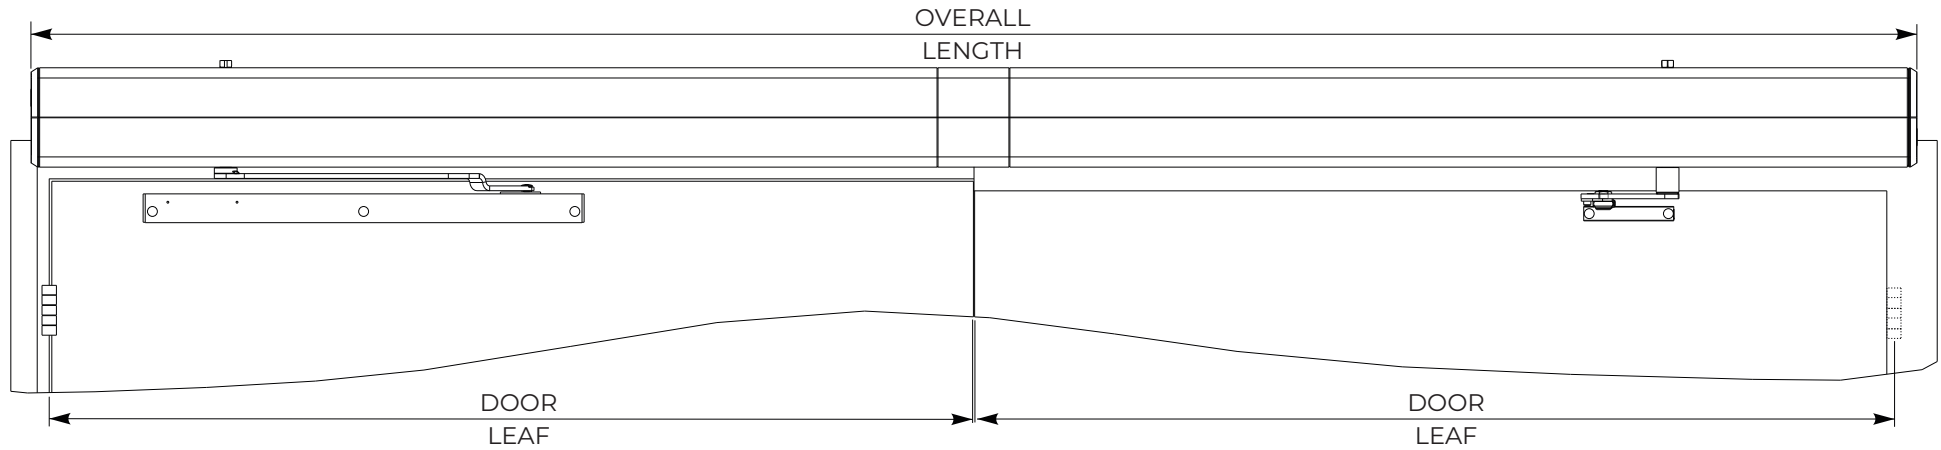



NOTES:

- Dimensions shown in inches / (mm) unless specified otherwise.
- Electrical requirements:
 - Power input of 120VAC, 5Amp minimum
 - Accessories circuit for activation to operator and low voltage
- For initial set up, doors much be un-latched and free to move
- For additional installation instructions, see instruction sheet 80-9360-1047-020. Visit www.NortonRixson.com
- Refer to page 2 for proper handling of product

This application uses the 6051-2R arm and track for the Pull Side door and 6071-1 arm assembly for the Push Side door

D6001DER2 Series Template
shown on pairs of 36", 38", 40", 42", 44", 46" and 48" frames
shown with up to 5" Butt Hinges
Reveal of 4-3/4" (121) to 7-3/8" (187) on Push and Pull sides
Maximum Opening of 100°

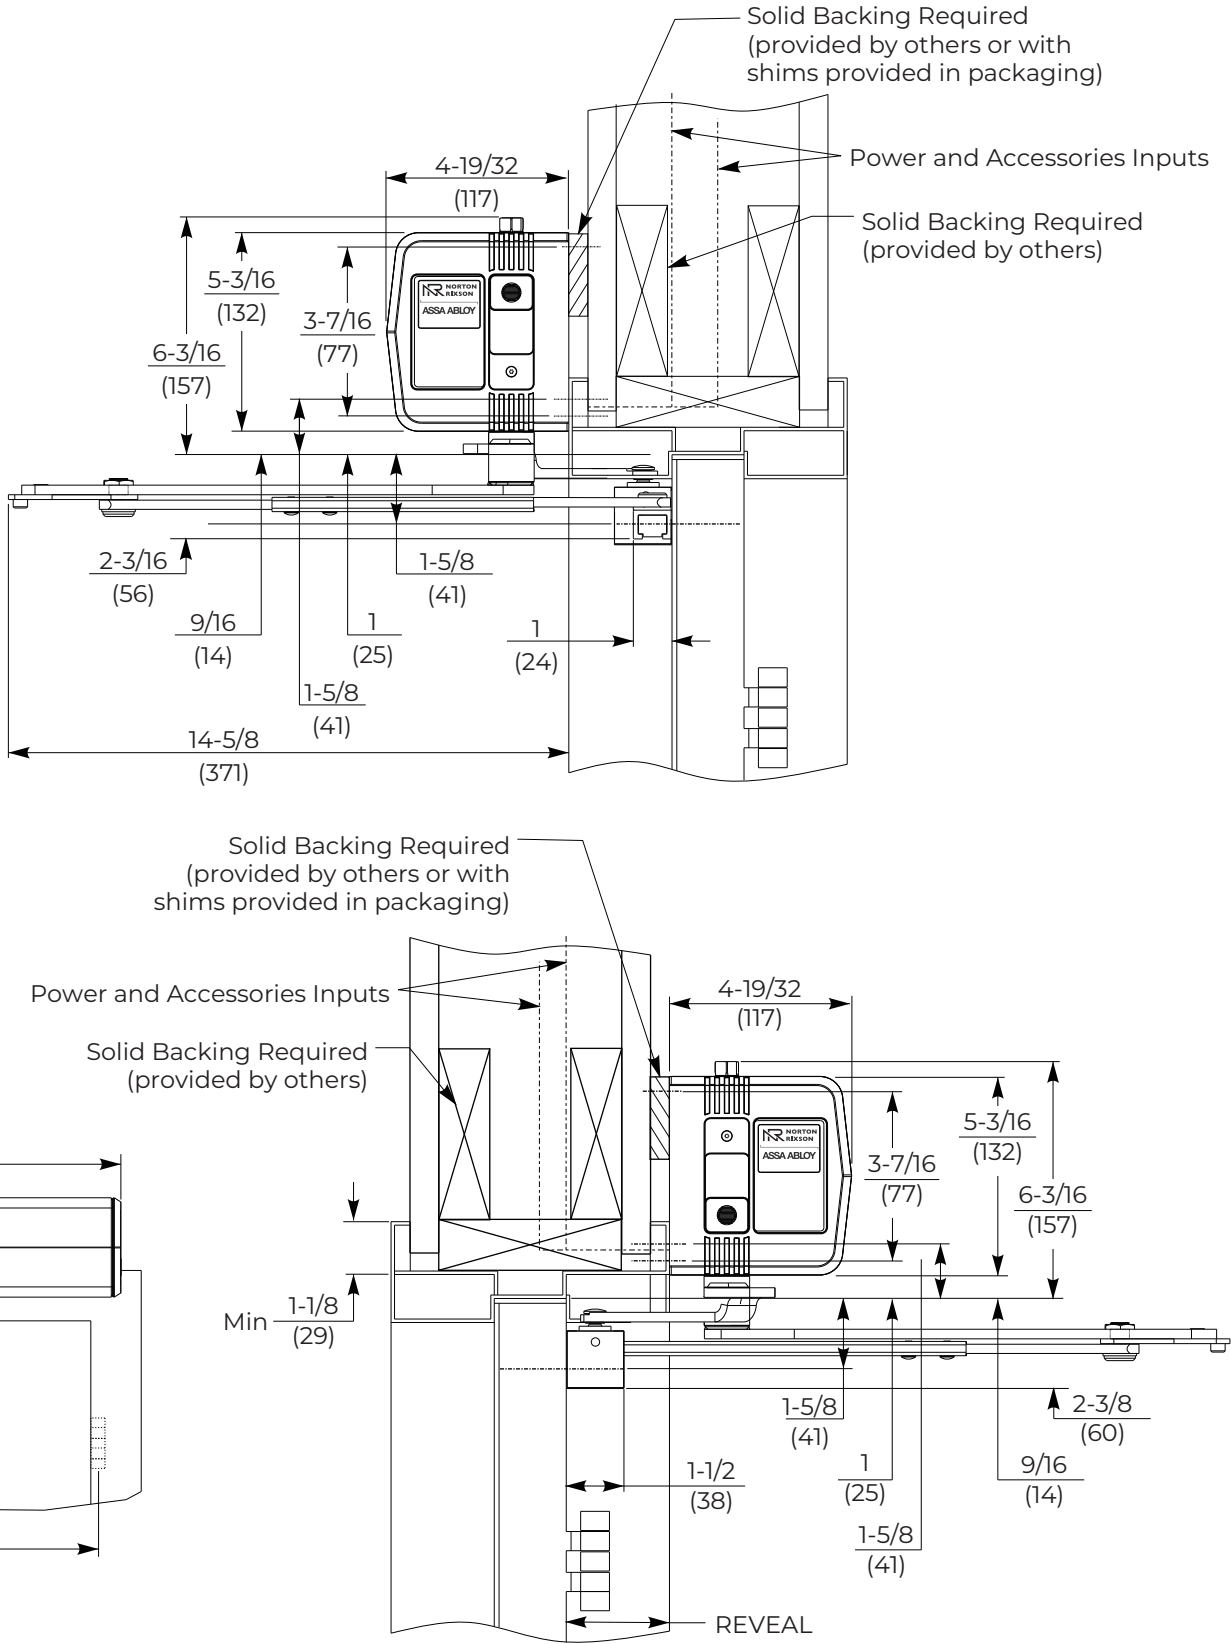

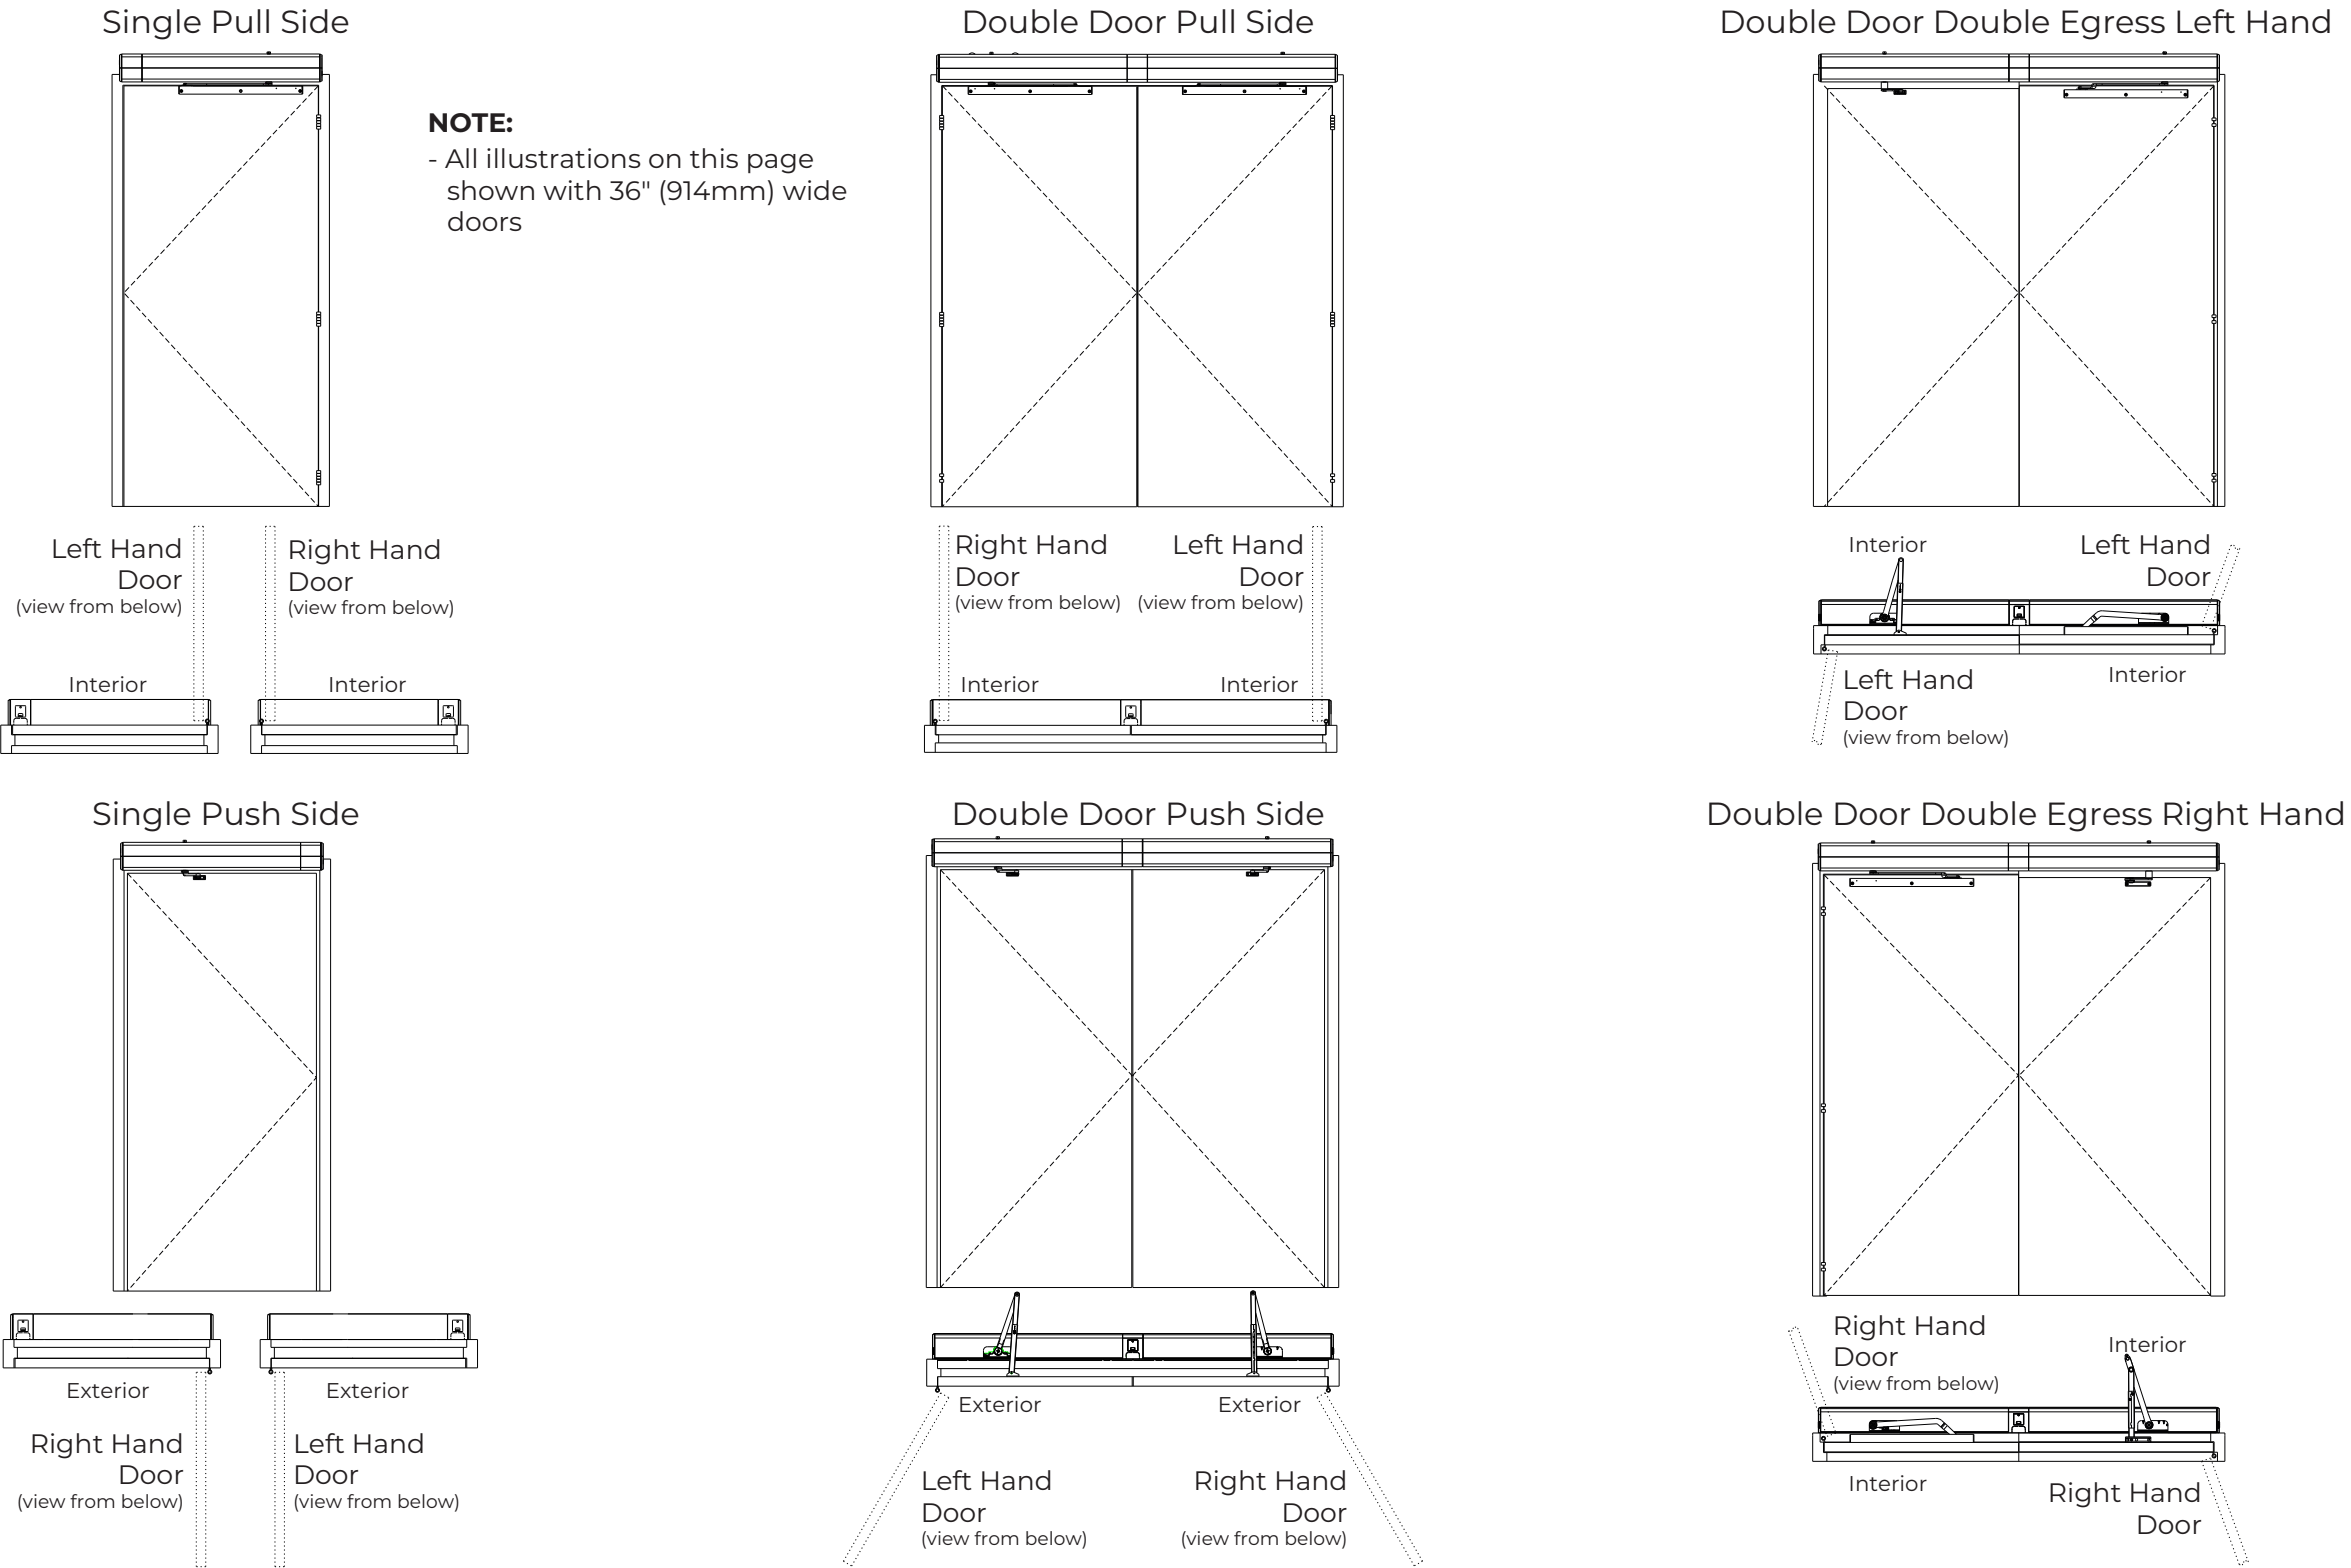

D6001DER2 Series Template

shown on pairs of 36", 38", 40", 42", 44", 46" and 48" frames

shown with up to 5" Butt Hinges

Reveal of 4-3/4" (121) to 7-3/8" (187) on Push and Pull sides

Maximum Opening of 100°

Page 2

NORTON
RIXSON

ASSA ABLOY

TEMPLATE NUMBER

7360-1061


REV


2

DATE

05/23


Approved 2023-07-12

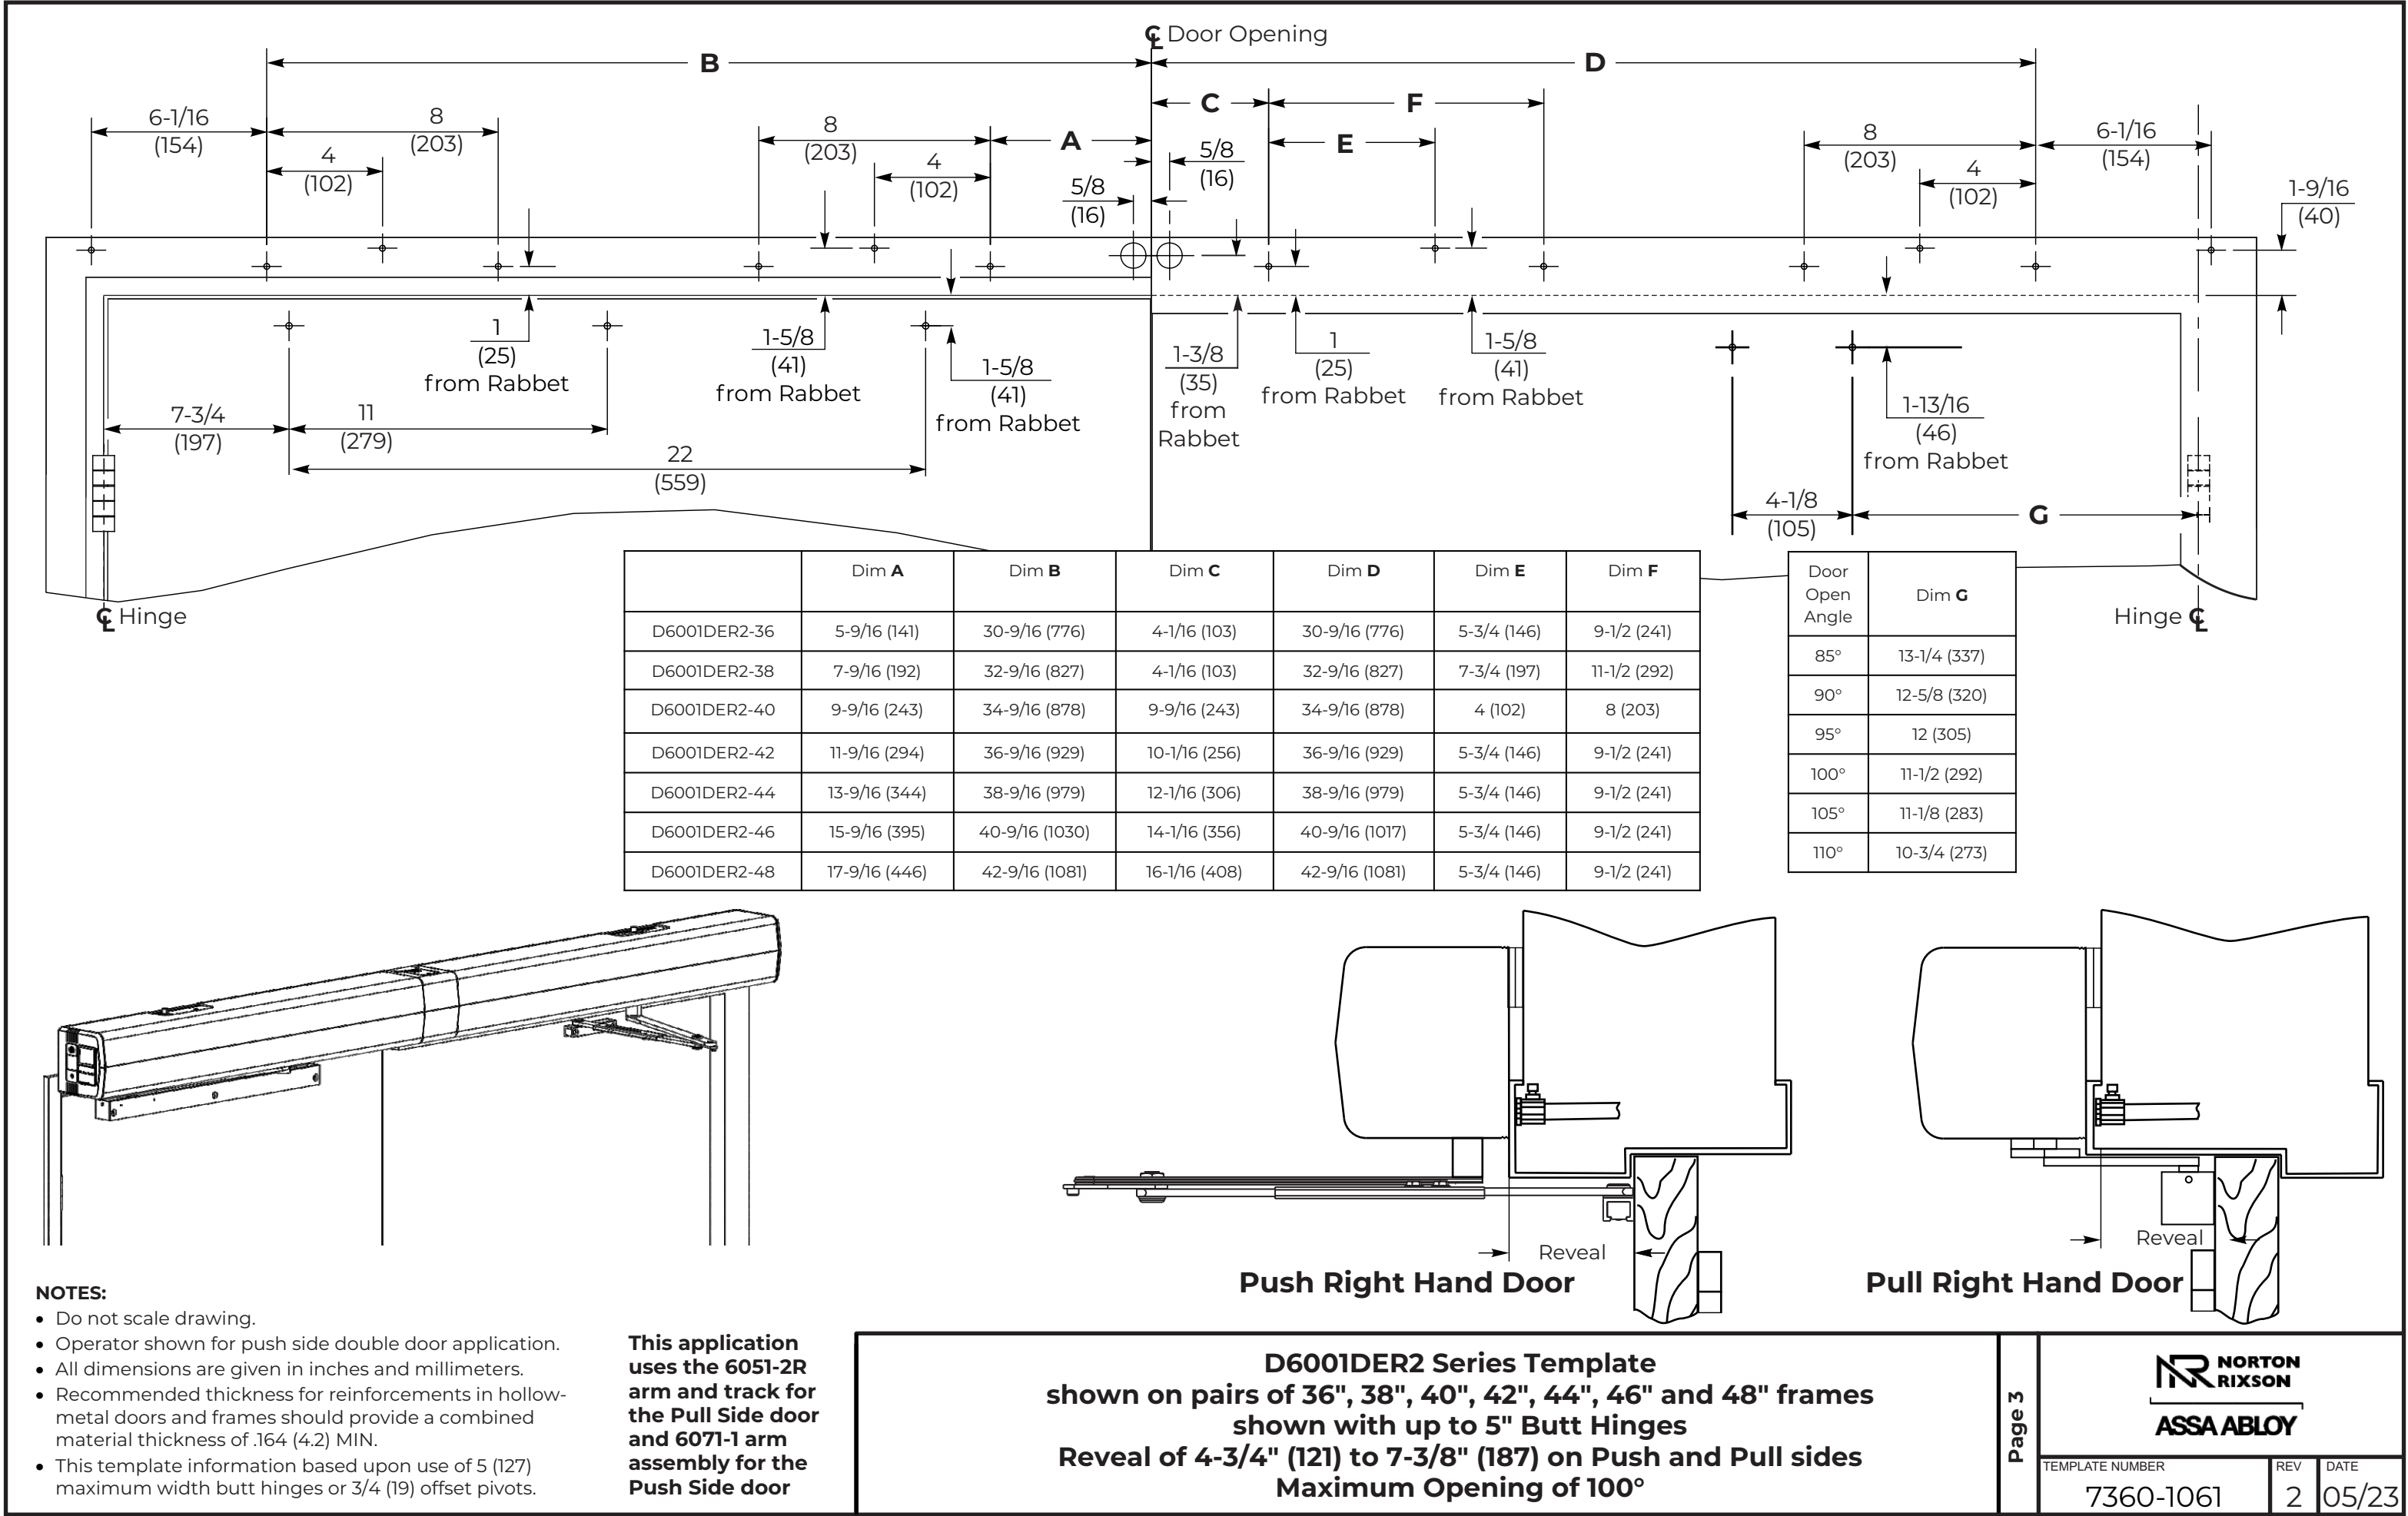

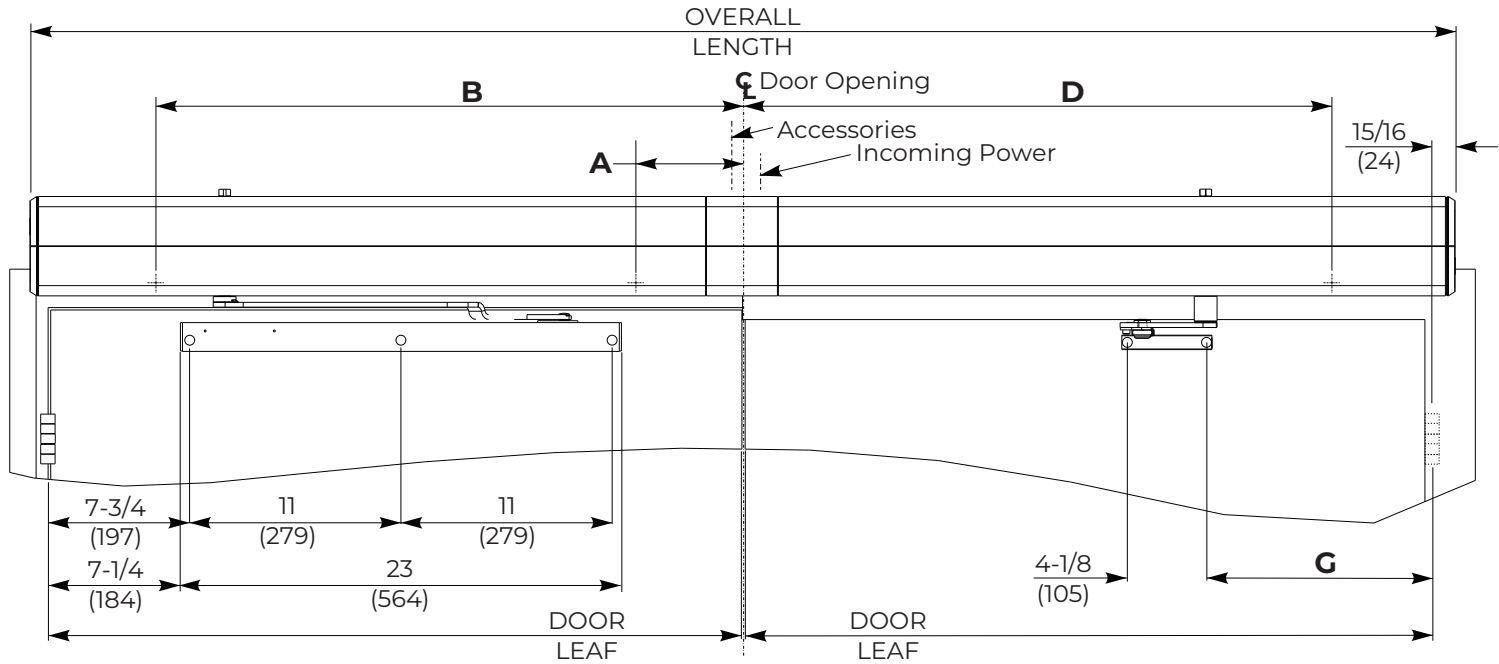



	Door Leaf Width	OAL (Overall Length)	Dim A	Dim B	Dim D
D6001DER1-36	36 (914)	74-1/4 (1886)	5-9/16 (141)	30-9/16 (776)	30-9/16 (776)
D6001DER1-38	38 (965)	78-1/4 (1988)	7-9/16 (192)	32-9/16 (827)	32-9/16 (827)
D6001DER1-40	40 (1016)	82-1/4 (2089)	9-9/16 (243)	34-9/16 (878)	34-9/16 (878)
D6001DER1-42	42 (1067)	86-1/4 (2191)	11-9/16 (294)	36-9/16 (929)	36-9/16 (929)
D6001DER1-44	44 (1118)	90-1/4 (2292)	13-9/16 (344)	38-9/16 (979)	38-9/16 (979)
D6001DER1-46	46 (1168)	94-1/4 (2394)	15-9/16 (395)	40-9/16 (1030)	40-9/16 (1017)
D6001DER1-48	48 (1219)	98-1/4 (2496)	17-9/16 (446)	42-9/16 (1081)	42-9/16 (1081)

Door Open Angle	Dim G
85°	13-1/4 (337)
90°	12-5/8 (320)
95°	12 (305)
100°	11-1/2 (292)
105°	11-1/8 (283)
110°	10-3/4 (273)

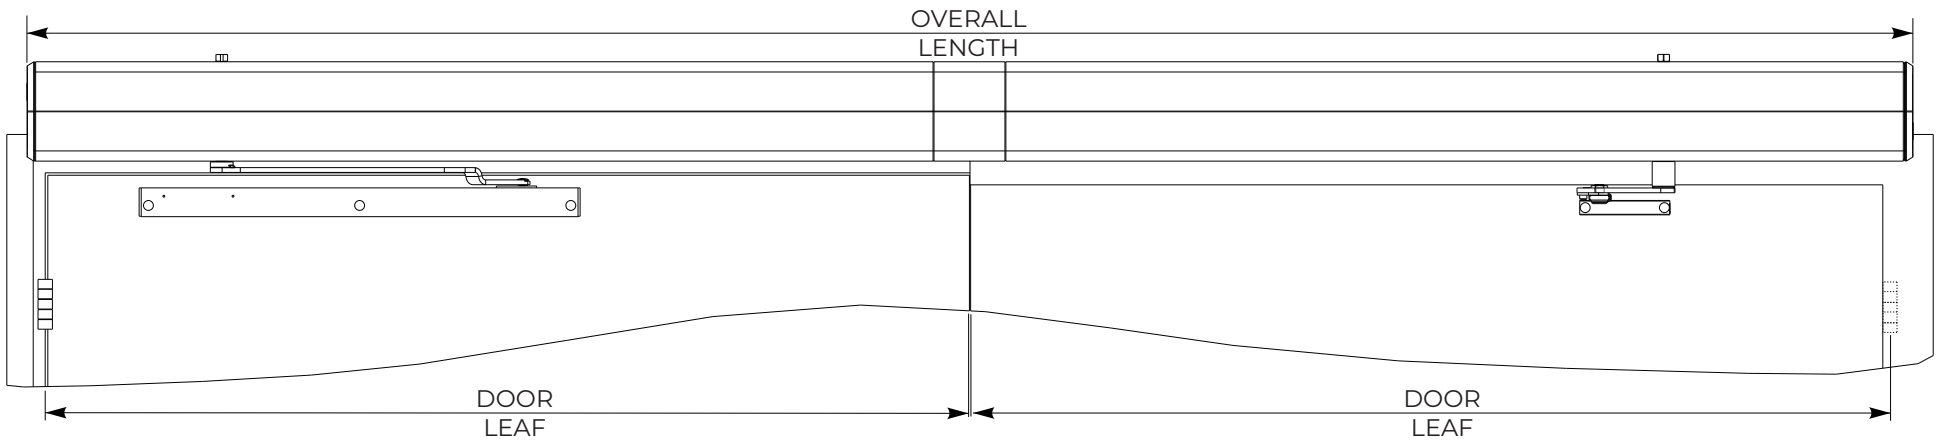

- NOTES:**
- Dimensions shown in inches / (mm) unless specified otherwise.
 - Electrical requirements:
 - Power input of 120VAC, 5Amp minimum
 - Accessories circuit for activation to operator and low voltage
 - For initial set up, doors must be un-latched and free to move
 - For additional installation instructions, see instruction sheet 80-9360-1047-020. Visit www.NortonRixson.com
 - Refer to page 2 for proper handling of product

This application uses the 6051-2R arm and track for the Pull Side door and 6061-1 arm assembly for the Push Side door

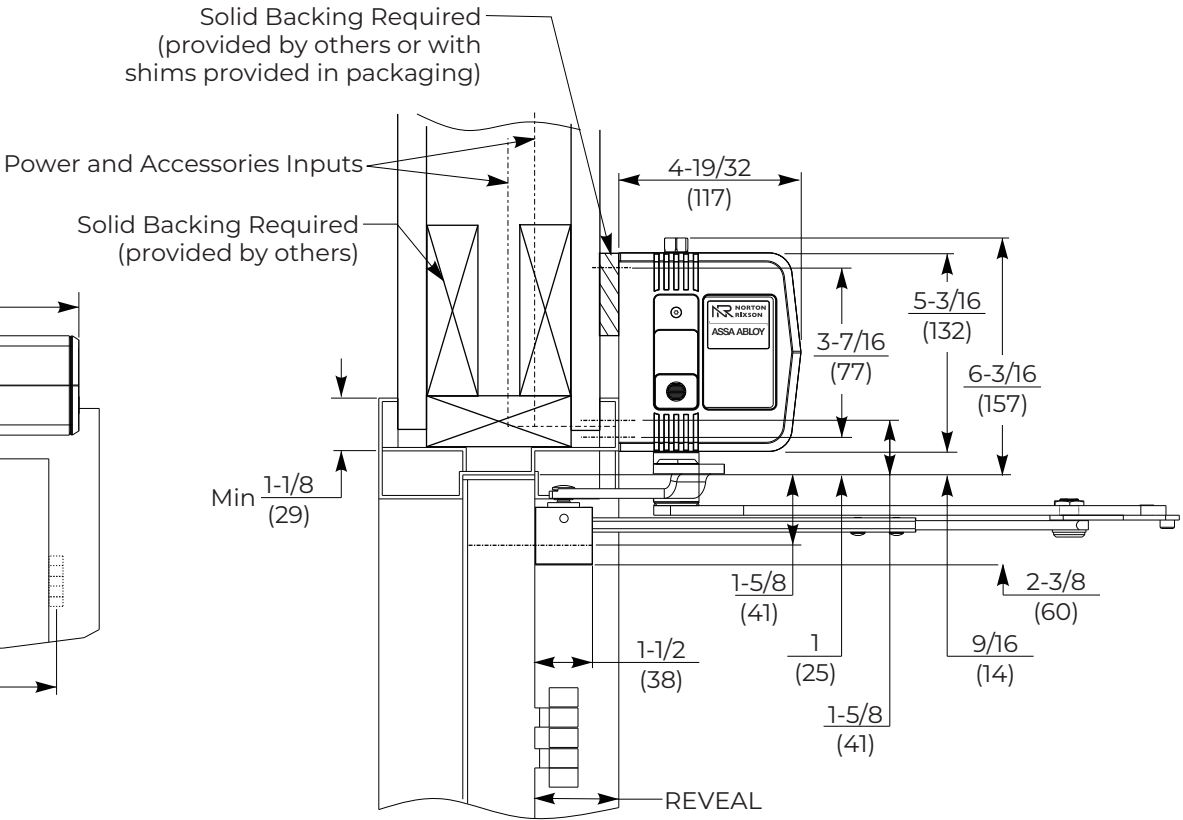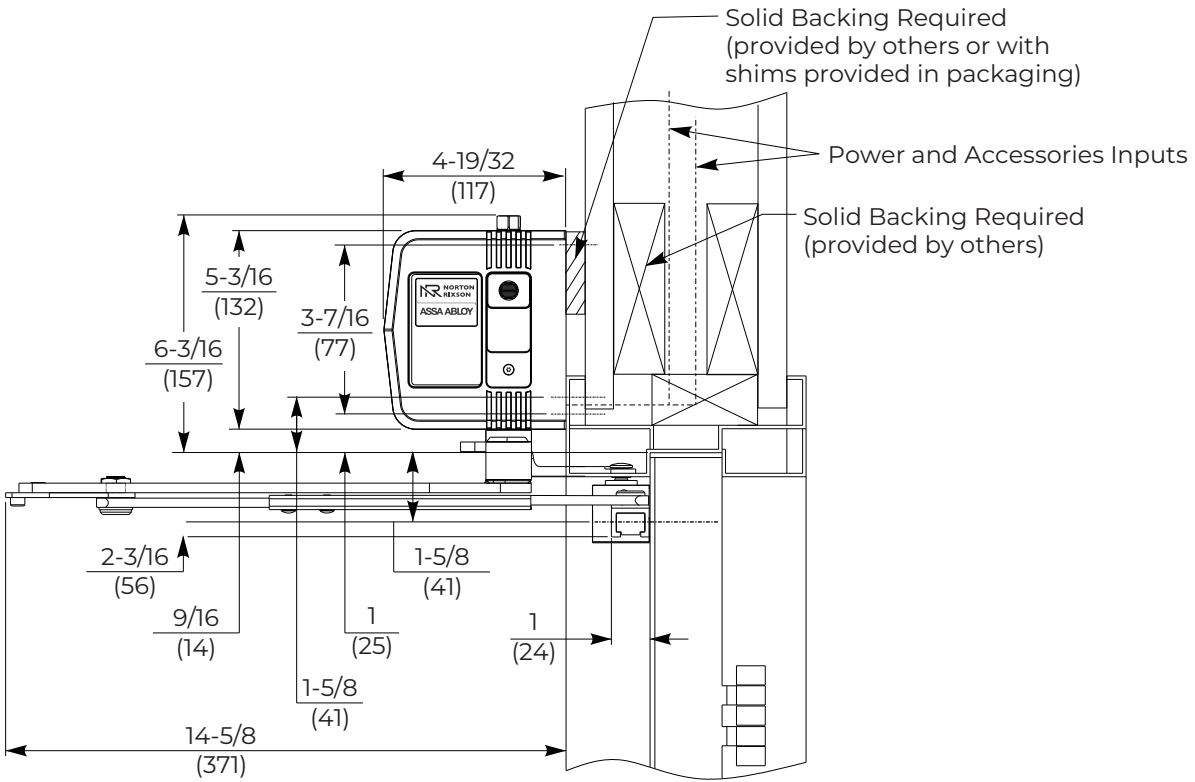

D6001DER1 Series Template

shown on pairs of 36", 38", 40", 42", 44", 46" and 48" frames

shown with up to 5" Butt Hinges

Reveal of 3" (76) to 4-3/4" (121) on Push and Pull sides Maximum Opening of 110°

Page 1

ASSA ABLOY

TEMPLATE NUMBER

7360-1059


REV

2

DATE

05/23

Approved 2023-07-12

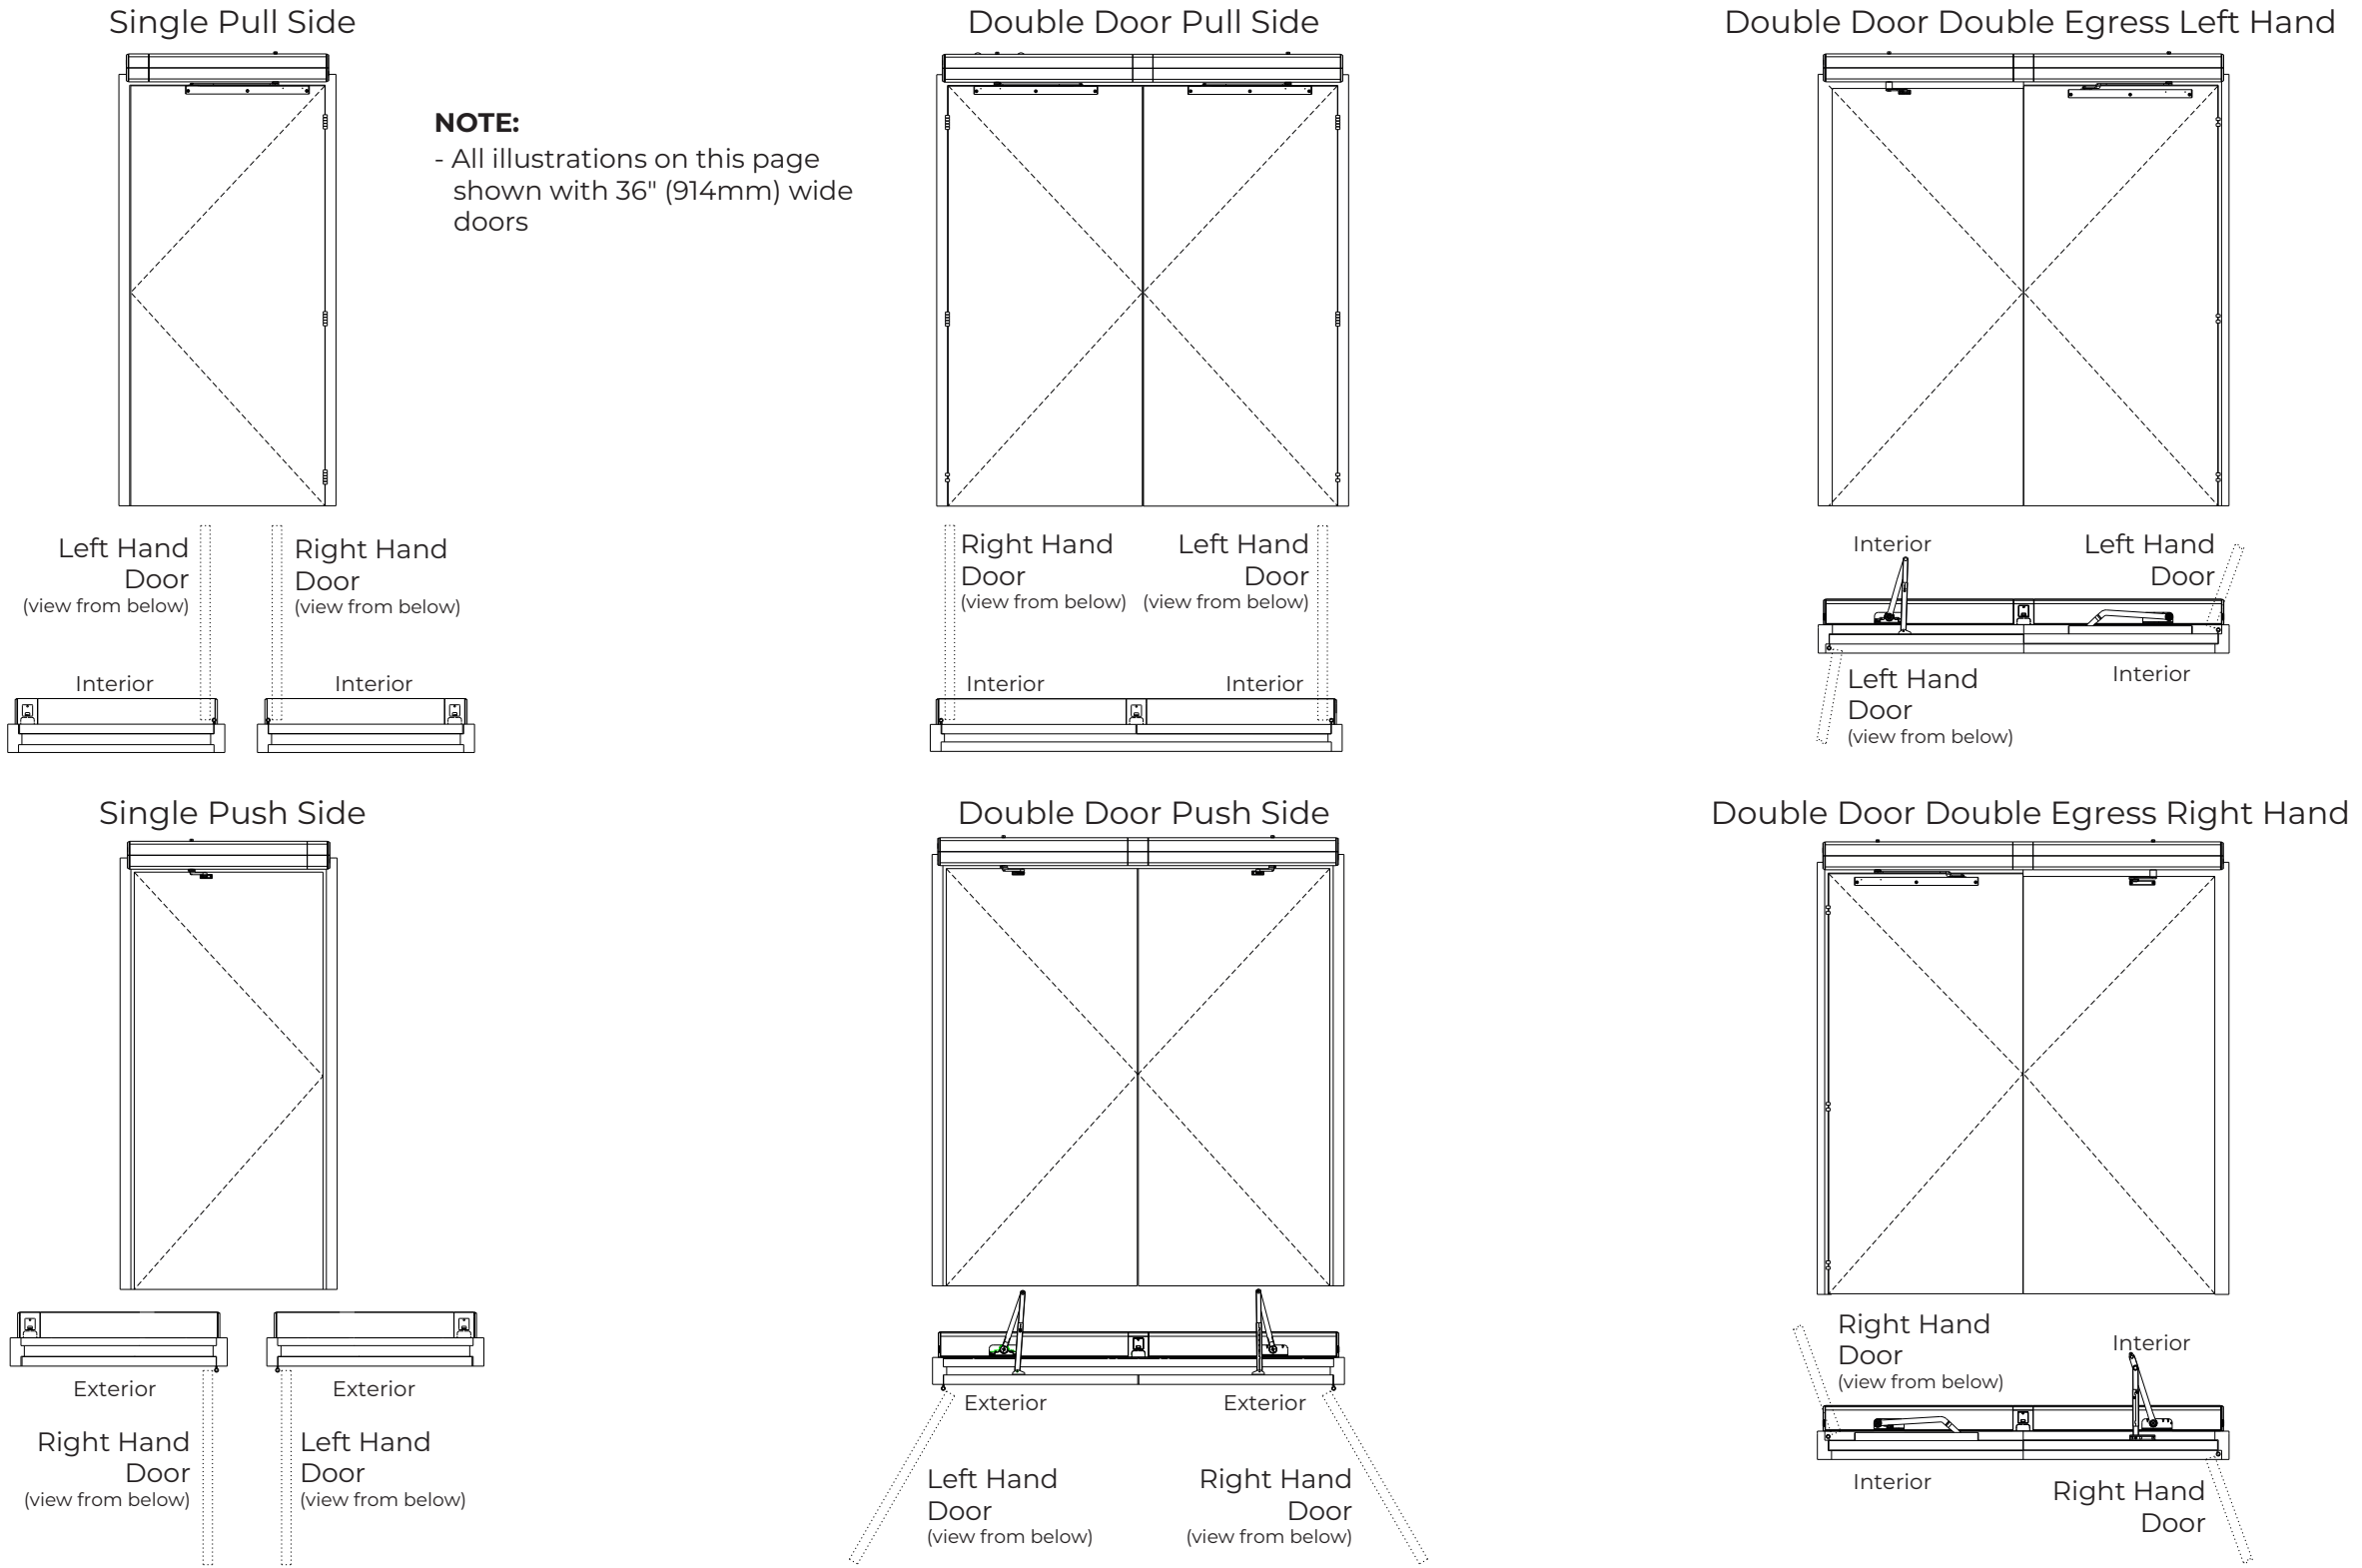

NOTE:
- All illustrations on this page
shown with 36" (914mm) wide
doors

