





TRADEMARK
HARDWARE




5/8" Minimum
1 1/2" Maximum
Greater than 1 1/2"

FOLD



5/8" Minimum
1 1/2" Maximum
Greater than 1 1/2"

FOLD



5/8" Minimum
1 1/2" Maximum
Greater than 1 1/2"

FOLD

FOLD

FOLD

Door Stop sizes greater
than 1 1/2" width
Use this Fold Line
Fold Aligns with Top of Door



FOLD

FOLD

FOLD

FOLD

FOLD

FOLD

FOLD

FOLD



FOLD

FOLD


FOLD

LEFT HAND TEMPLATE - PUSH MOUNT


Operator Mounting Bracket
For Narrow Stile Doors

Operator Mounting Bracket
For All Other Doors

Centerline of Door Hinge or Pivot
NOT Edge of Door

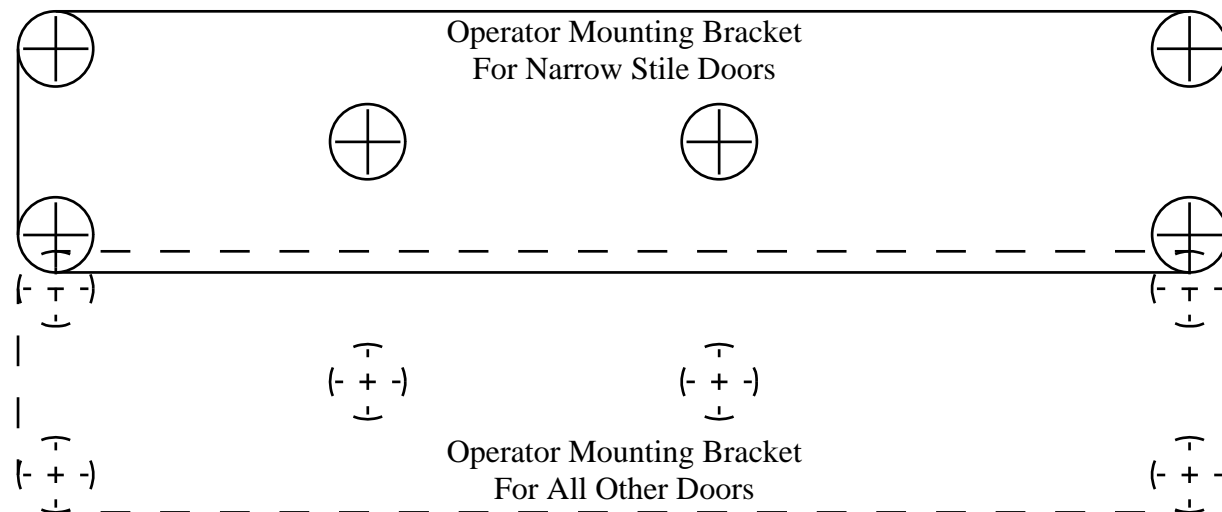

All other Door Stop sizes
Use this Fold Line
Fold Aligns with Top of Door



1 1/2" Or Less
5/8" Minimum
1 1/2" Maximum

Door Arm Pivot Shoe Centerline
For Butt Hung or Offset Pivot Doors

Door Arm Pivot Shoe Centerline
For Center Pivot Doors

This device does not work with Swing Clear hinges
or Balanced Doors
Minimum Reveal - 1 9/16"
Minimum Top Rail - 2"
Stop Width - Reveal minus 1"
Frame Face - No Minimum

PROGRAMMING ADAEZ

1. PRESS SELECT and ENTER until 4 LEDs flash green
 2. CLOSE door PRESS ENTER
 3. OPEN door PRESS ENTER
 4. CLOSE door PRESS ENTER
 5. PRESS and HOLD ENTER until LEDs go out.
- ADAEZ IS NOW PROGRAMMED

PROGRAMMING TRANSMITTER

1. PRESS and HOLD LEARN until 4 LEDs flash green.
2. PUSH the RF activation switch LEDs shall flash green.

RESETTING THE CONTROLLER

1. PRESS and HOLD ENTER
2. PRESS and RELEASE RESET

Technical Support 877-232-3987

www.adaez.com

Installation and Programming Videos Are Online

-----10 INCHES - REFERENCE-----

0803-Rev 4

FOLD

FOLD

FOLD

FOLD

FOLD

FOLD

FOLD

FOLD

FOLD

FOLD

FOLD

FOLD


FOLD

FOLD


FOLD

FOLD


Door Stop sizes greater than 1 1/2" width
Use this Fold Line
Fold Aligns with Top of Door



5/8" Minimum
1 1/2" Maximum
Greater than 1 1/2"




5/8" Minimum
1 1/2" Maximum
Greater than 1 1/2"



5/8" Minimum
1 1/2" Maximum
Greater than 1 1/2"


Door Arm Pivot Shoe Centerline
For Center Pivot Doors

Door Arm Pivot Shoe Centerline
For Butt Hung or Offset Pivot Doors



1 1/2" Or Less
5/8" Minimum
1 1/2" Maximum

RIGHT HAND TEMPLATE - PUSH MOUNT

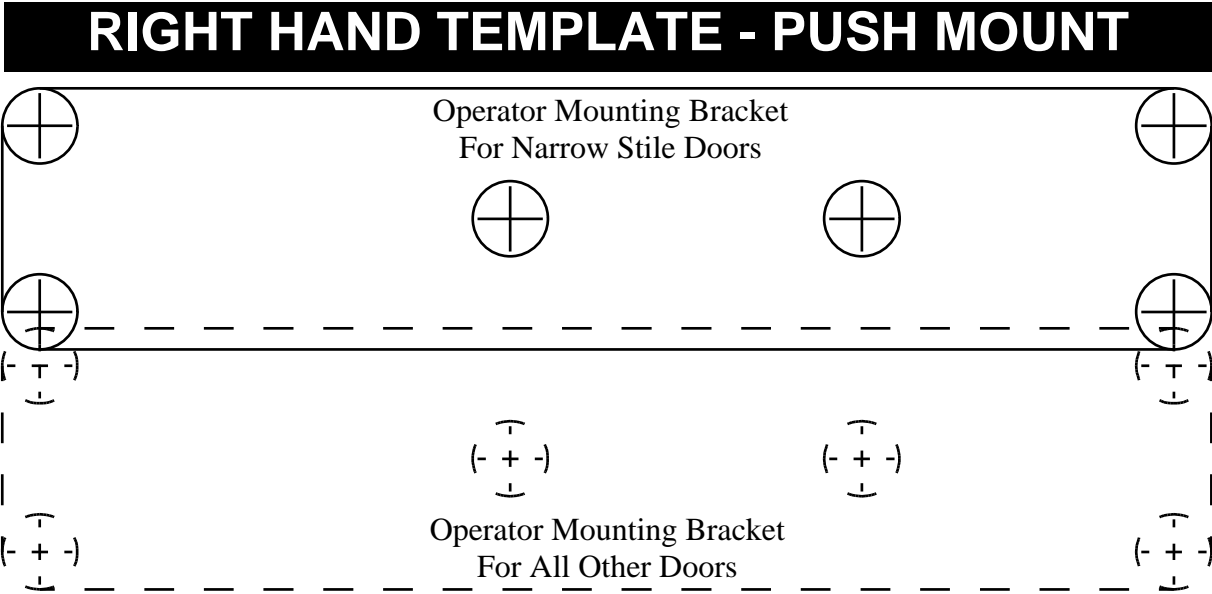

Operator Mounting Bracket
For Narrow Stile Doors

Operator Mounting Bracket
For All Other Doors

PROGRAMMING ADAEZ

1. PRESS SELECT and ENTER until 4 LEDs flash green
2. CLOSE door PRESS ENTER
3. OPEN door PRESS ENTER
4. CLOSE door PRESS ENTER
5. PRESS and HOLD ENTER until LEDs go out.
ADAEZ IS NOW PROGRAMMED

PROGRAMMING TRANSMITTER

1. PRESS and HOLD LEARN until 4 LEDs flash green.
2. PUSH the RF activation switch LEDs shall flash green.

RESETTING THE CONTROLLER

1. PRESS and HOLD ENTER
2. PRESS and RELEASE RESET

This device does not work with Swing Clear hinges or Balanced Doors
Minimum Reveal - 1 9/16"
Minimum Top Rail - 2"
Stop Width - Reveal minus 1"
Frame Face - No Minimum

Technical Support 877-232-3987
www.adaez.com
Installation and Programming Videos Are Online

10 INCHES - REFERENCE

0803-Rev 4