




**Trademark  
HARDWARE**

# INSTALLATION GUIDE

## Door Seal, Head and Jamb Neoprene Ring FS

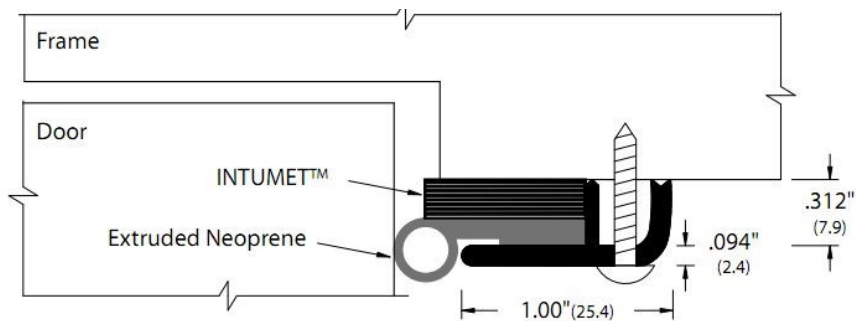

### How To Install :

- 1 Measure, cut, and install the head piece making contact with the door.
- 2 Measure, cut, and install the side jambs. The jamb pieces should be continuous to the floor or top of the threshold. Mount pieces with the door in closed position. The seals should be set to hold a paper in place. This should be a contact seal, not crushing.