

Häfele Slido Classic 20 IF C

With soft closing mechanism (optional)

Door weight: max. 20 kg (44 lbs.)

Door height: max. 1,400 mm (4' 7 1/8")

Door width: max. 1,250 mm (4' 1 3/16")

Door thickness: 16 – 19 mm (5/8" – 3/4")

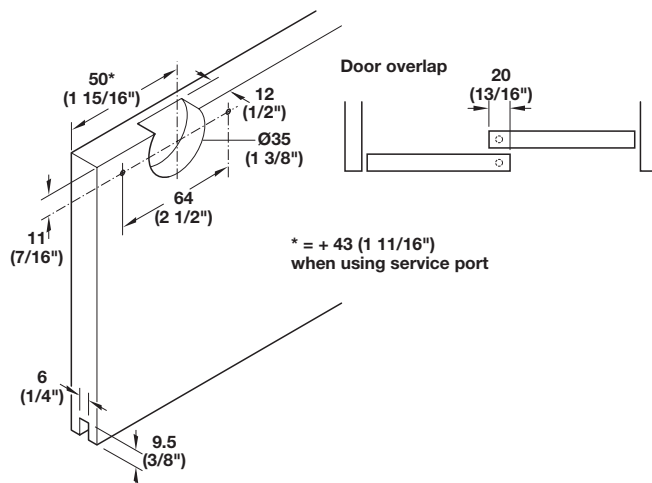
Door width: >350 mm (13 3/4") with soft closing mechanism
on one side, >530 mm (20 7/8") with soft closing
mechanism on both sides

Height adjustment: +/- 1.5 (1/16") mm on running gear using
adjusting wheel


- Mounts quickly and easily
- Space saving compared to hinged doors
- Soft closing feature prevents door slam and helps eliminate noise



Drilling pattern



Dimensions in mm
Inches are approximate

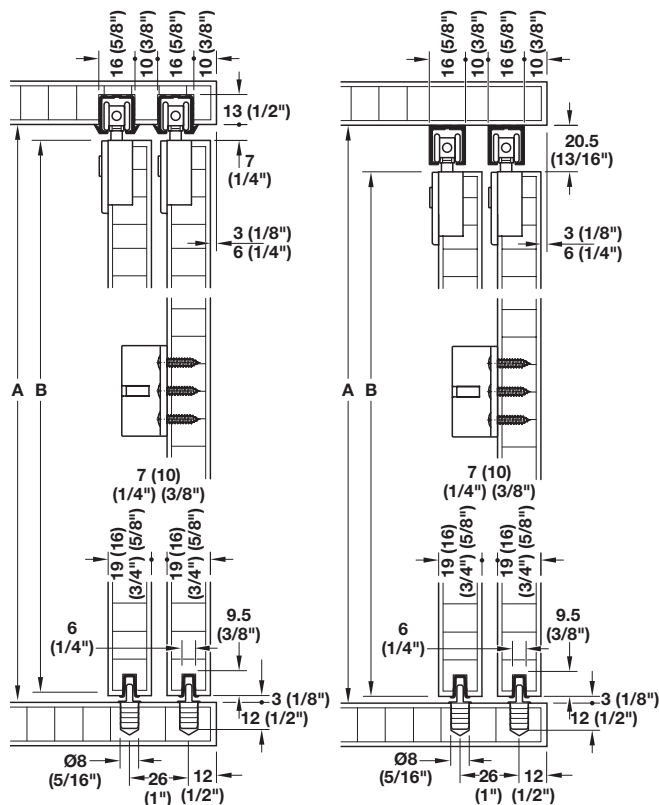


Groove-mounted track

A = internal cabinet height
B = internal cabinet height
minus 10 mm (13/32")

Screw-mounted track


A = internal cabinet height
B = internal cabinet height
minus 23.5 mm (15/16")

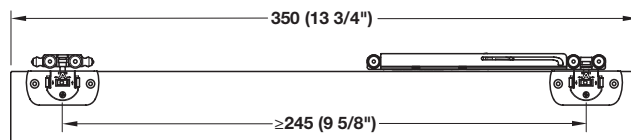soft&silent




Minimum door width with one soft closing mechanism.

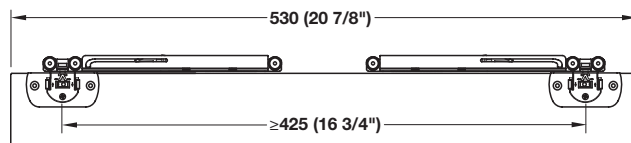* Add 43 mm (1 3/16") when using service port.



Minimum door width with two soft closing mechanisms.

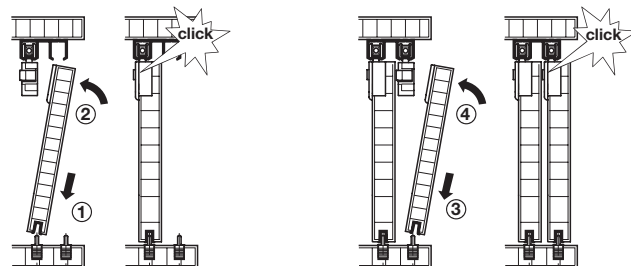Door panel installation












Häfele Slido Classic 20 IF C Set

| | Item No. |
|--|------------|
| For 2 doors, with track stopper | 402.33.018 |
| For 2 doors, with single soft closing on each door | 402.33.019 |
| For 2 doors, with dual soft closing on each door | 402.33.020 |







Note

Please order upper running track and lower guide channel separately.

Set Components

| | Description | Material | Finish/Color | Qty. 402.33.018 | Qty. 402.33.019 | Qty. 402.33.020 | Item No. |
|---|---|---------------|--------------|--------------------|--------------------|--------------------|------------|
|  | Housing, for screw mounting to door | Plastic | gray | 4 pcs. | 4 pcs. | 4 pcs. | 402.30.107 |
|  | Running gear with friction bearing, clips into housing | Plastic | gray | 4 pcs. | 2 pcs. | - | 402.30.119 |
|  | Running gear with soft closing mechanism and friction bearing, clips into housing | Plastic | gray | - | 2 pcs. | 4 pcs. | 402.30.123 |
|  | Track stopper | Plastic | gray | 4 pcs. | 2 pcs. | - | 402.30.303 |
|  | Door stopper for soft closing mechanism, mounts in upper running track | Zinc die-cast | - | - | 2 pcs. | 4 pcs. | 402.30.321 |
|  | Guide, for press fitting | Plastic | gray | 2 pcs. | 2 pcs. | 2 pcs. | 402.30.220 |
|  | Door stop with buffer, mounts to the front sliding door | Plastic | gray | 1 pc. | 1 pc. | 1 pc. | 402.30.320 |
|  | Service port, for upper running track (to access running gear after installation) | Plastic | gray | 2 pcs. | - | - | 402.33.403 |
|  | Mounting aid for track installation | Plastic | red | 1 pc. | 1 pc. | 1 pc. | 402.33.404 |

Individual Components

| | Description | Min. cabinet top thickness | Material | Finish/Color | Length | Item No. |
|---|---|--------------------------------|----------|-------------------------|-------------------------|------------|
|  | Single upper running track, for 16 mm (5/8") groove Note Optional screw holes for 3.0 mm countersunk screws are included in track | glue mounting 19 (3/4") | Aluminum | bright | 2.5 m (8' 2 7/16") | 402.33.642 |
| | | screw mounting 30 (1 3/16") | | | 3.5 m (11' 5 13/16") | 402.33.643 |
|  | Double upper running track, for 16 mm (5/8") groove Note Optional screw holes for 3.0 mm countersunk screws are included in track | glue mounting 19 (3/4") | Aluminum | bright | 2.5 m (8' 2 7/16") | 402.33.652 |
| | | screw mounting 30 (1 3/16") | | | | |
|  | Single upper running track, for screw mounting | - | Aluminum | silver colored anodized | 2.5 m (8' 2 7/16") | 402.30.642 |
|  | Double upper running track, for screw mounting | - | Aluminum | silver colored anodized | 2.5 m (8' 2 7/16") | 402.30.652 |
|  | Lower guide channel, for glue mounting into 6 mm (1/4") groove | - | Plastic | gray | 2.5 m (8' 2 7/16") | 402.30.802 |
| | | | | | 3.5 m (11' 5 13/16") | 402.30.803 |
|  | Flathead screw 3.0 x 1/2", Phillips drive, for screw mounted upper running tracks | - | Steel | zinc-plated | 12 mm (1/2") | 402.33.010 |

Note

Polyurethane glue recommended for groove mounted tracks.

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensions in mm
Inches are approximate