


Roll-out shelf




Application



Description

- Possible with any TANDEM runner
- **100 lb static load capacity**


Basic components

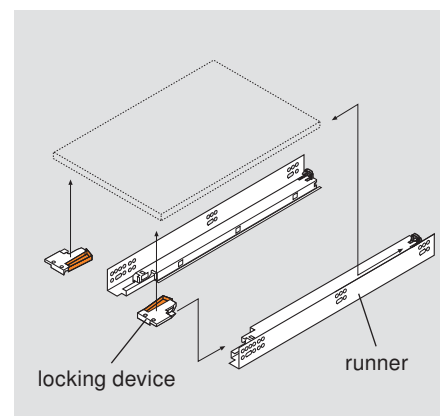

Components

Shelf size and position in opening


Front view

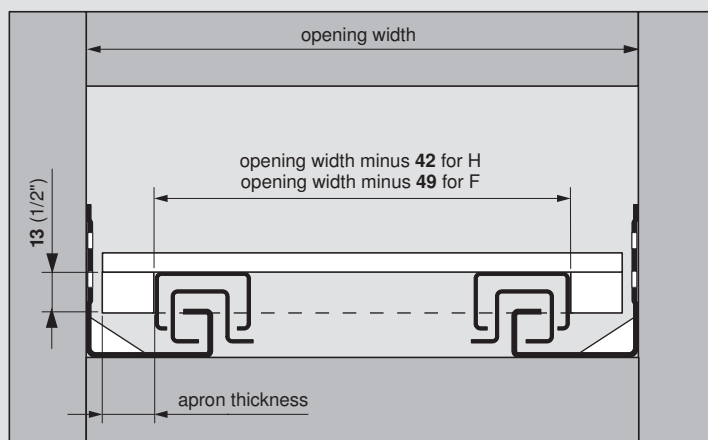

Maximum apron thickness **16 (5/8")** for H
Maximum apron thickness **19 (3/4")** for F

Rear mounting block

Attach rear mounting block to the back of the shelf instead of notching and boring



- Eliminates the need to edge bore holes for hooks on roll-outs

NOTE: Shelf length = specified runner length minus **10 (13/32")**

	Part no.
Rear mounting block	T51.7000.01
Installation screw	6064N

Side adjustable locking device



- One right and one left required per drawer
- With side-to-side adjustment
- Self-adjusting drawer length tolerance
- Minimum inside drawer width **170 (6-11/16")**
- Height adjustment **+3 (1/8")**
- Side adjustment **±1.5 (1/16")**
- For use with 563/569 series runners only
- For other options see page 32

Part no.

Right locking device **T51.1901 R**

Installation Left locking device **T51.1901 L**

page 11 Installation screw **606N or 606P**

Shelf assembly

