




**Trademark  
HARDWARE**

# PRODUCT SPECS

## Product Specs

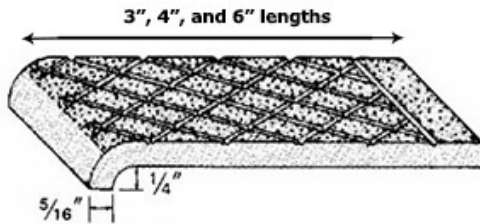


Chief use: as nosings in concrete stairs.  
Tread installed flush all around.

### Anchor Options:

#### Aluminum Anchors for Cast Aluminum Nosing

1/4" (6.35 mm) F.H.M. plated screws and nuts with steel wing anchors for fresh concrete are standard fasteners for nosings.



#### WING TYPE ANCHOR FOR CASE AND EXTRUDED NOSINGS

Steel wing anchors, bolts, and nuts are furnished for field attachment into factory-drilled and ctsk. (countersunk) holes, prior to tread installation. Placed in a single, staggered, or double row, according to tread width. 3/4" length - FHMS (Flathead Machine Screw). Wing is metal- standard mild steel.



#### Tapcon Screws

The design of the Tapcon® concrete screw allows them to anchor into concrete, brick and block.



## Product Applications



**SKU: AG101.3, AG101.4, AG101.6**

**Trademark  
HARDWARE**

148 Horton Drive, Suite B  
Monsey, NY 10952

Phone: 845-388-1300  
Fax: 845-367-4657

[www.TMHardware.com](http://www.TMHardware.com)  
[sales@tmhardware.com](mailto:sales@tmhardware.com)