




**Trademark
HARDWARE**

PRODUCT SPECS

SAFETY TREADS FOR EXISTING BUILDINGS

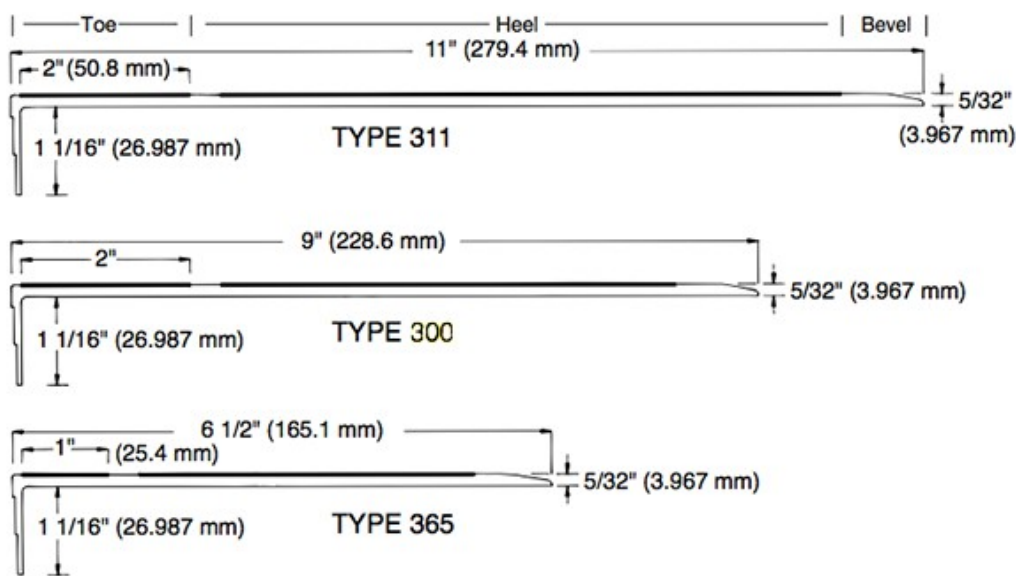

ANCHORS FOR EXISTING CONSTRUCTION

Treads being superimposed on existing stairs can be furnished pre-drilled and ctsk. for wood, machine or Tapcon screws. Standard spacing is 3" (76.2 mm) in from each end, approx. 12" (304.8 mm) centers, in single, staggered, or double row, according to tread width. Will furnish #10 screws.



WOOD or MACHINE
SCREWS



SILVER TAPCON
SCREWS,




SCREW & SHIELDS

APPLICATIONS



FLEXMASTER® and FLEX-TRED®
are available with **NITEGLOW®**
Glow-In-The-Dark
anti-slip surface.

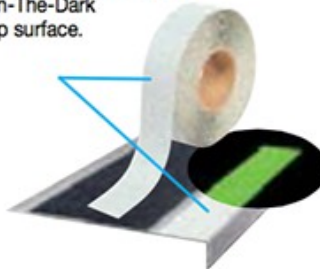

SKU: W311, W300, W365

**Trademark
HARDWARE**

148 Horton Drive, Suite B
Monsey, NY 10952

Phone: 845-388-1300
Fax: 845-367-4657

www.TMHardware.com
sales@tmhardware.com