

Adams Rite

Phoenix, AZ 85044


Mon-Fri: 6:00am - 4:00pm PDT

Tel: 1-800-872-3267 Fax: 1-800-232-7329

www.adamsrite.com

MS1847 Series MS[®] Deadlock/Deadlatch

Installation Instructions

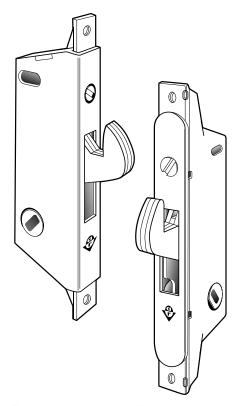


ASSA ABLOY, the global leader in door opening solutions

80-0180-446 Rev A



SPECIFICATIONS

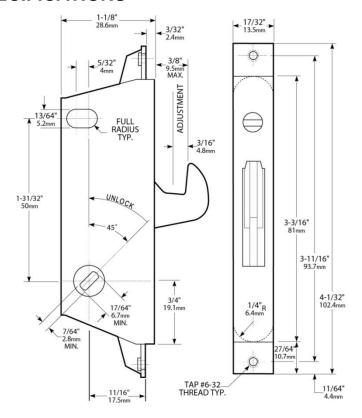

IMPORTANT: This product must be installed according to all applicable building and life safety codes!

INSTALLATION

Tools and Equipment Needed

The following common hand tools are needed for installation:

- Needle Nose Vise Grips
- · Flat tip screwdriver
- Drill
- Saw
- · Measuring Tape/Ruler


- Phillips screwdriver
- · Pencil or Ink Pen
- #6 Drill Bit
- File



Preparing the Stile

1. ENSURE the stile is prepared in accordance with the following figure.

NOTE: Dimensions shown are recommended minimums.

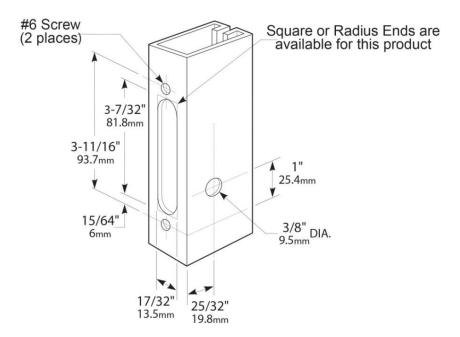


Installing the MS1847

- 1. DETERMINE the following:
 - Style of lock face end: rectangular or full radiused
 - Hub angle: vertical, 22.5 degree, or 45 degree.
 - Measurement of screw mounting holes
- Using a flat head screwdriver, fully EXTEND the latch hook out of the lock body.
- FASTEN the needle nose vise grips onto the latch hook with a snug fit.
- 4. INSERT the lock body into the door.



5. SCREW the lock into position using the two lock mounting screws on the door's edge (see figure below).

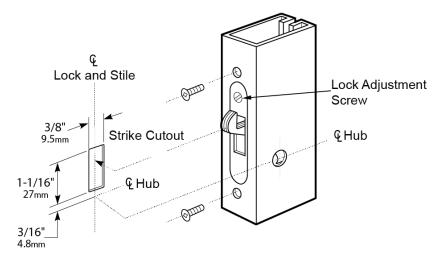

- 6. REMOVE the needle nose vise grips.
- 7. INSTALL the latch lever and ENSURE it engages the lock.
- 8. INSTALL the door handle or cylinder pull, if applicable, using the two door handle mounting screws.
- 9. CHECK the operation of the door.

NOTE: The lock adjustment screw allows for up to 3/16" [4.8 mm] of adjustment.

10. IF the door does <u>not</u> lock, OR there is too much play in the lock, THEN ADJUST the lock, as necessary, using the adjustment screw on the front top of the lock.

Adams Rite is a brand associated with Hanchett Entry Systems, Inc., an ASSA ABLOY Group company. Copyright © 2016, Hanchett Entry Systems, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of Hanchett Entry Systems, Inc. is prohibited.

