



**Trademark
HARDWARE**

INSTALLATION GUIDE

Installation Instructions:

IN GENERAL:



1. With garage door in closed position, locate weatherstrip so it will seal the gaps between the door sides and the jambs, the door top and the jamb header and the floor.
2. Fasten with big headed nails supplied.
3. Install nails approximately one every 4 inches.

ONE PIECE DOORS:

1. At door bottom and sides, install on the face or the edges of the door.
2. At door top, install on jamb header.


SECTIONAL DOORS:

1. At door bottom, install on the face or the bottom edge of the door.
2. At door sides, install on jambs.
3. At door top, install on jamb header.

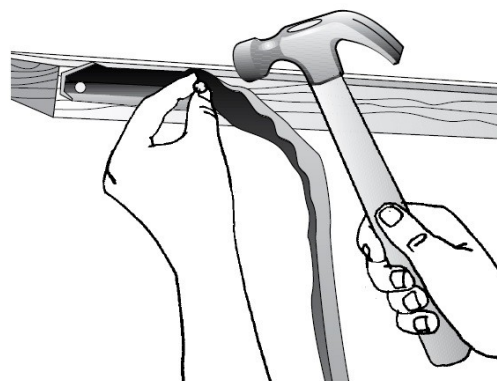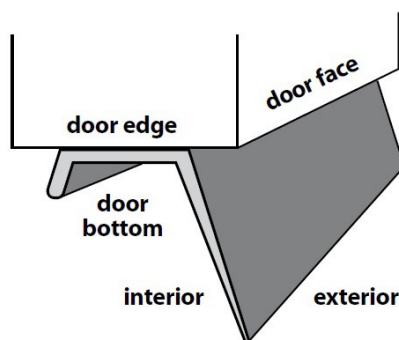


The long flap should face the exterior (outside) of the garage.

One Piece Garage Door:

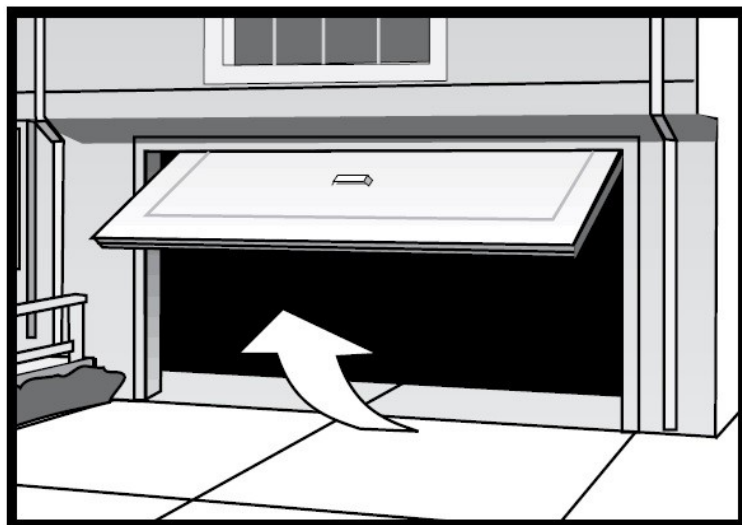

Sectional Garage Door:

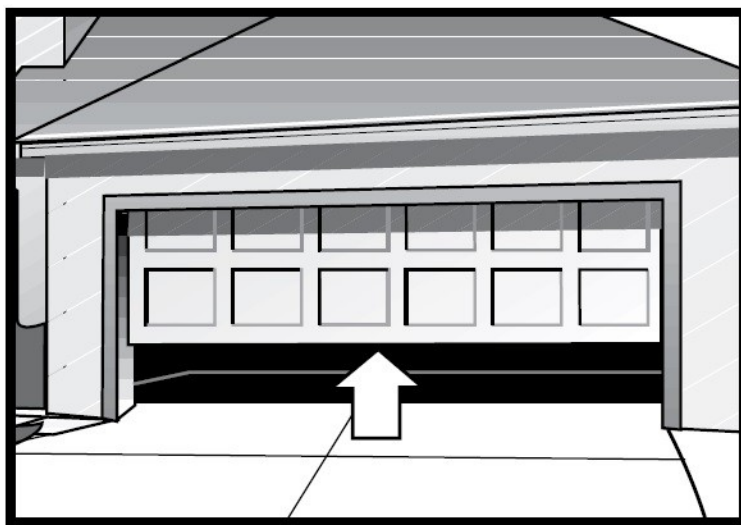

**Trademark
HARDWARE**

148 Horton Drive, Suite B
Monsey, NY 10952

Phone: 845-388-1300
Fax: 845-367-4657

www.TMHardware.com
sales@tmhardware.com