

FG3000S45 Fire Glazing Tape in 20- and 45-Minute Hollow Metal Door


Metal Vision Frame Applications

- Maximum hollow metal door size: 48" x 120" single, pairs approved
- Door and frame must be manufactured by companies that are classified by Underwriters Laboratories Inc.® for the manufacturing and labeling of hollow metal fire doors and frames. Warnock-Hersey (I.T.S.) listings are also available through participating hollow metal manufacturers
- For exterior fire rated applications, seal against moisture using standard industry methods
- Verify all applications with your door and/or frame manufacturer

45




Color: White




Sectional View of Applications

FG3000S45 applied between frame and glass

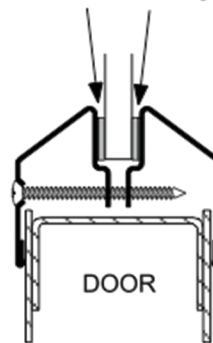


Beveled


FG3000S45 applied between frame and glass

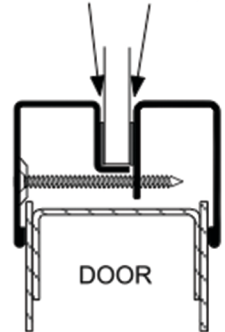


Square

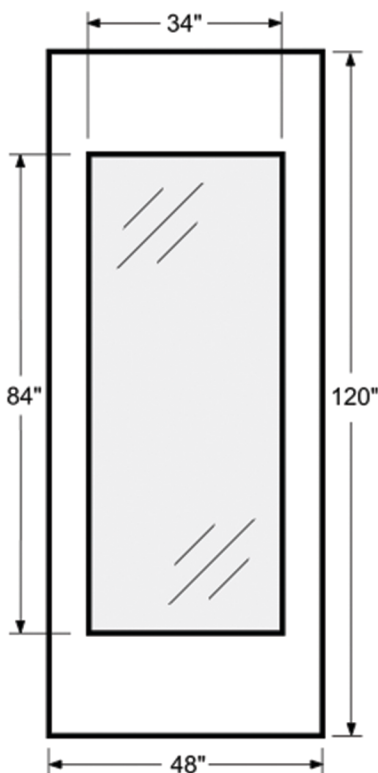

For 20 minute and 45 minute the maximum visible glass size allowed is 34" wide x 84" high or 2,856 square inches per vision lite.

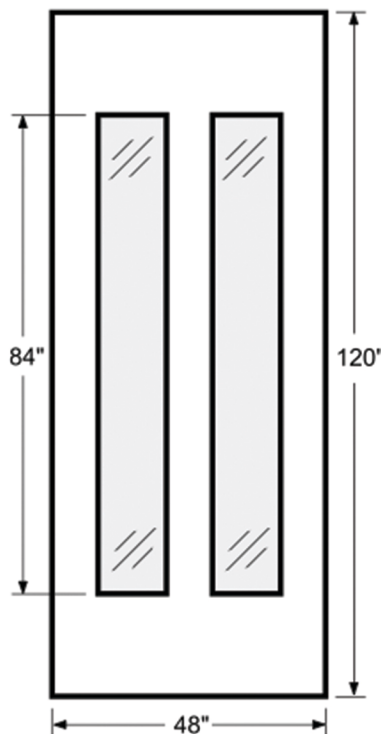

Multiple vision lites are allowed in both the 20 minute and 45 minute, but the combined total visible glass area allowed is 2,856 square inches per door.

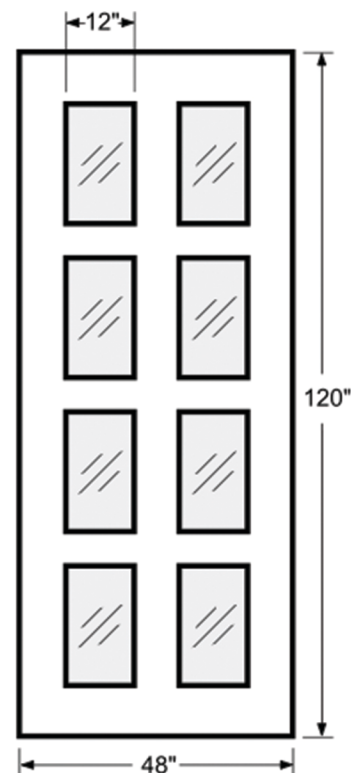

www.tmhardware.com