


FG3000S45 Fire Glazing Tape in 20- and 45-Minute Wood Door


Metal Vision Frame Applications

FG3000S45

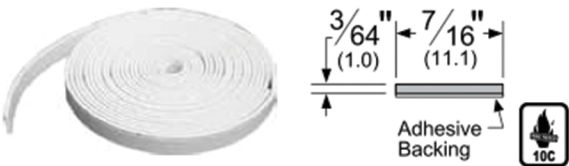


Color: White

Sectional View of Applications

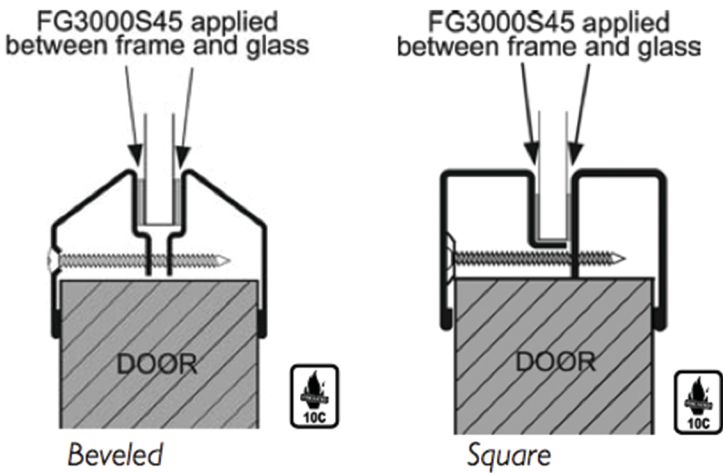


Technical Data For 20- And 45-Minute Wood Doors Equipped With FG3000S45 (Metal Vision Frame, Single And Multiple Lite Applications)

Lite Configurations

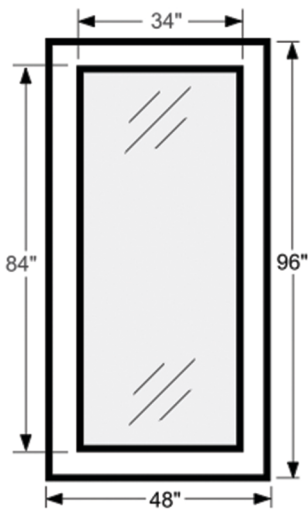

Single Vision Lite

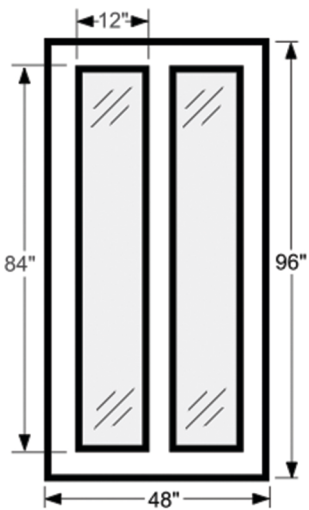

Multiple Vision Lites

The maximum visible glass area allowed for single lites is 34" wide x 84" high; for single and multiple lites, the total visible glass area allowed is 2,856 square inches per door.

Lite Specifications	Door Specification	Listing/Labeling Specifications
<p>Maximum Dimensions (Single Lite): 34" wide x 84" high, 2,856 square inches per lite</p> <p>Maximum Combined Dimensions (Multiple Lites): Multiple vision lites are allowed in both the 20- and 45-minute doors, but the combined total visible glass area allowed is 2,856 square inches per door.</p>	<p>Maximum Dimensions: or both 20- and 45-minute doors, the maximum wood door size is 48" x 96" single, pairs approved</p>	<ul style="list-style-type: none">• Door and frame must be manufactured by companies that are classified by Underwriters Laboratories Inc.® for the manufacturing and labeling of hollow metal fire doors. Warnock Hersey (I.T.S.) listings are also available through participating hollow metal manufacturers• Listed Glazing Products include:<ul style="list-style-type: none">– Wire Glazing: Pilkington, Asahi and Central Glass• Individual door and frame manufacturers' modification procedures may vary slightly from the size listings shown

