



Handed

ML19/FML19 Side Jamb Pivot 3/4" Offset Installation Instructions

Door should already be hung with top pivot and bottom pivot (or floor closer)


1.  Mortise door & frame per template on reverse side.

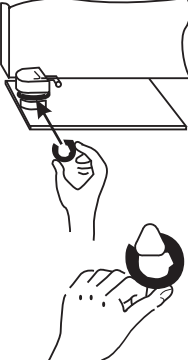
2.  Affix pivot to door & frame.

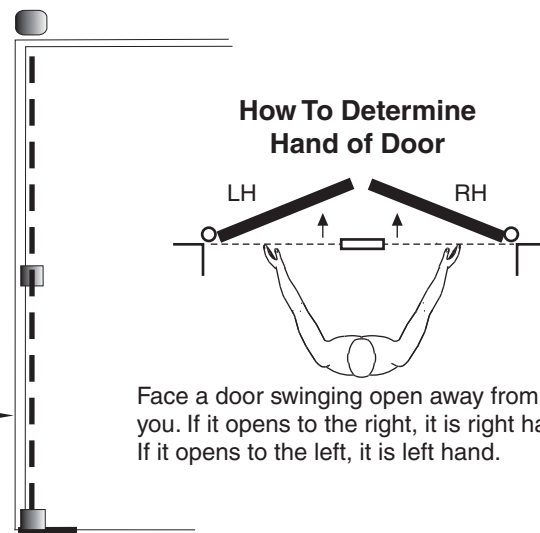
3.  Align pivot point from top pivot to bottom arm. (See diagram)


4.  Loosen arm screw*.


5.  Remove hex cap.

6.  Turn stud screw clockwise. Raise the door to the desired height.

7.  Using shims furnished with bottom arm, fill gap between arm and base.



8.  Turn stud screw counterclockwise until door rests on shims.

9.  Tighten arm screw on spindle. Open and close door several times. Re-tighten arm screw.

10.  Tighten stud screw until you feel resistance.

11.  Replace hex cap.