



Jamb Installation

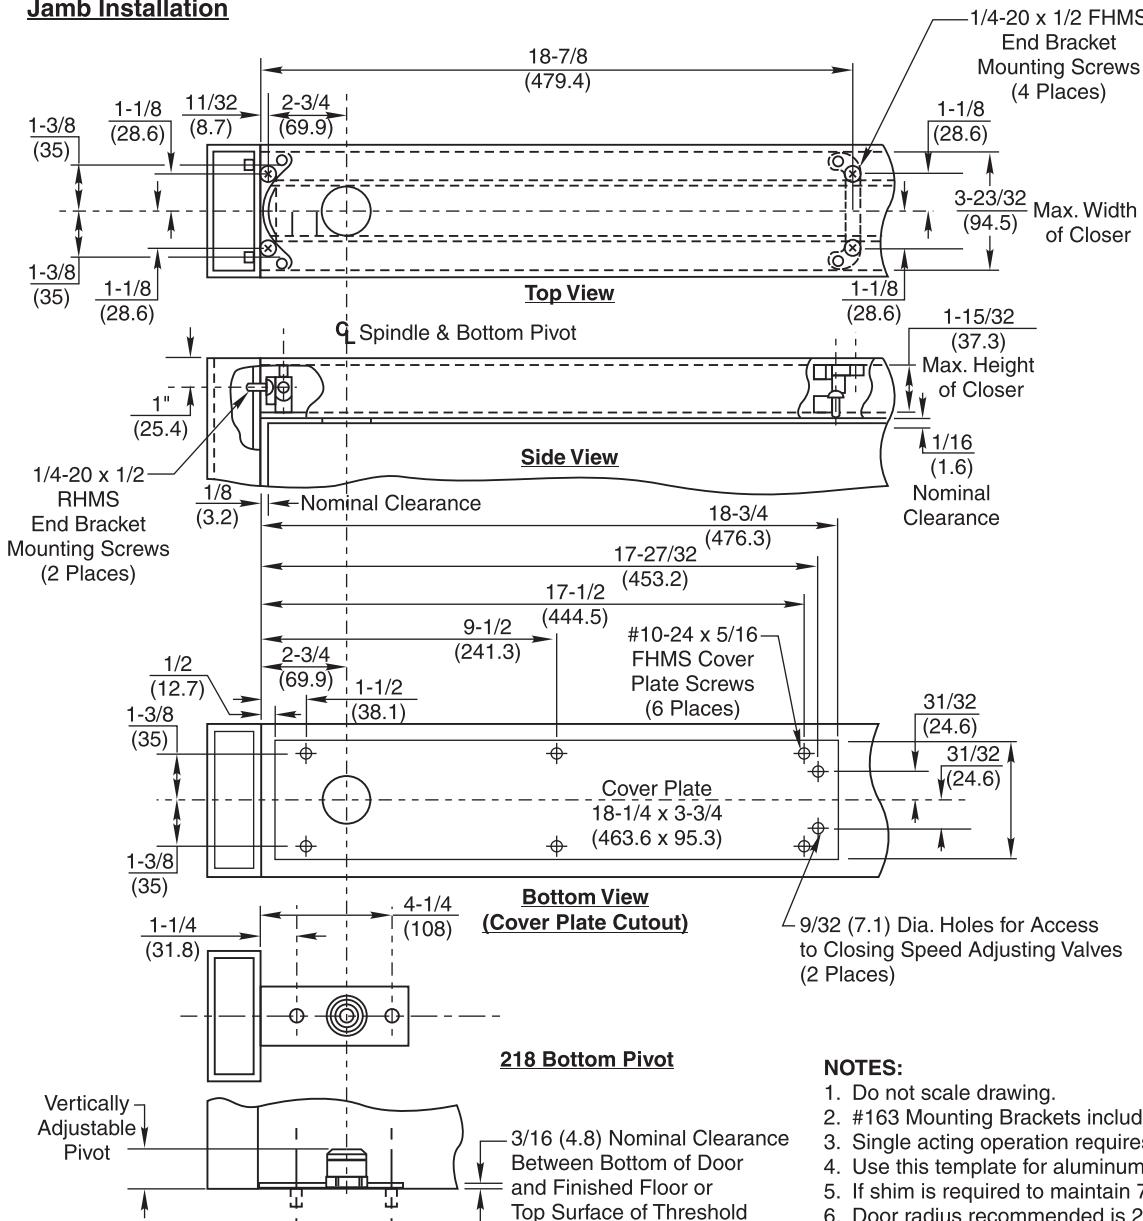


Door Installation


Top View

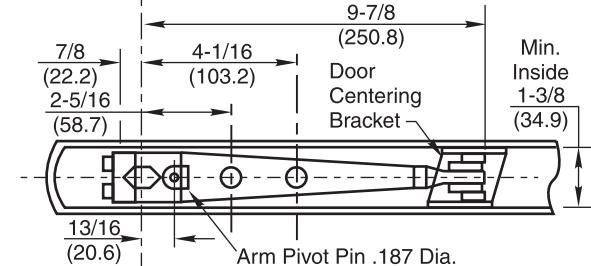


Side View

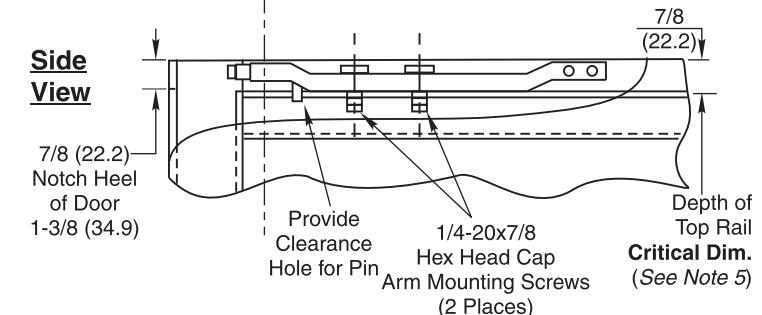

Side View

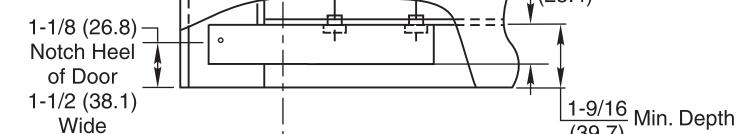

Bottom View

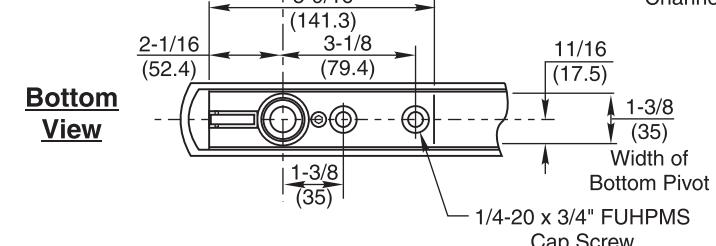

NOTES:

- Do not scale drawing.
- #163 Mounting Brackets included.
- Single acting operation requires a door stop on the underside of frame.
- Use this template for aluminum frames and doors having 7/8" (22.2) depth top rail.
- If shim is required to maintain 7/8" (22.2) rail depth, shim should be full length of arm.
- Door radius recommended is 2-5/8" (66.7).
- All dimensions given in inches (mm).

**700 Single Acting & 800 Double Acting
Overhead Concealed Door Closer
Center Hung for Aluminum Doors and Frames**

RIXSON®
ASSA ABLOY

www.rixson.com

TEMPLATE NUMBER

OC60100

DATE

01-11