


6. Centering the door. Open the adjustment valves.

### 800 Series

Center door in jamb by adjusting centering screws in top arm. Tighten arm screws securely.

### 700 Series

Adjust arm centering screws to provide pressure of door against stop on frame. Tighten main arm screws securely.

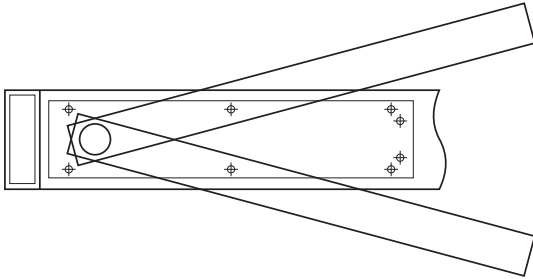


7. Adjust closing speed of door.

### 800 Series

Each valve controls one swing only. To decrease speed turn clockwise. To increase speed turn counter clockwise.

Adjust each valve screw per illustration.

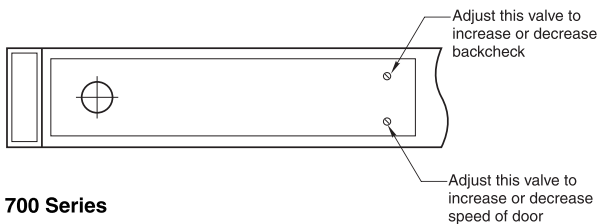

### 700 Series

To decrease speed turn valve clockwise. To increase speed turn valve counter clockwise.

To increase backcheck, turn valve clockwise, to decrease backcheck turn valve counter clockwise.

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience. Rixson® is a registered trademark of Yale Security Inc., an ASSA ABLOY Group company. Copyright© 2007, 2014, Yale Security Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Yale Security Inc. is prohibited.

Rixson Specialty Door Controls

www.rixson.com

**RIXSON®**  
**ASSA ABLOY**


866-474-9766 Technical Department

**RIXSON®**  
**ASSA ABLOY**

## MW700/800 Series Overhead Concealed Closer (Wood Door & Metal Frame) MW700 Series, Center Hung Single Acting, Handed MW800 Series, Center Hung Double Acting, Non-handed

### Installation Instructions

IS-MW700MW800 (12-14)

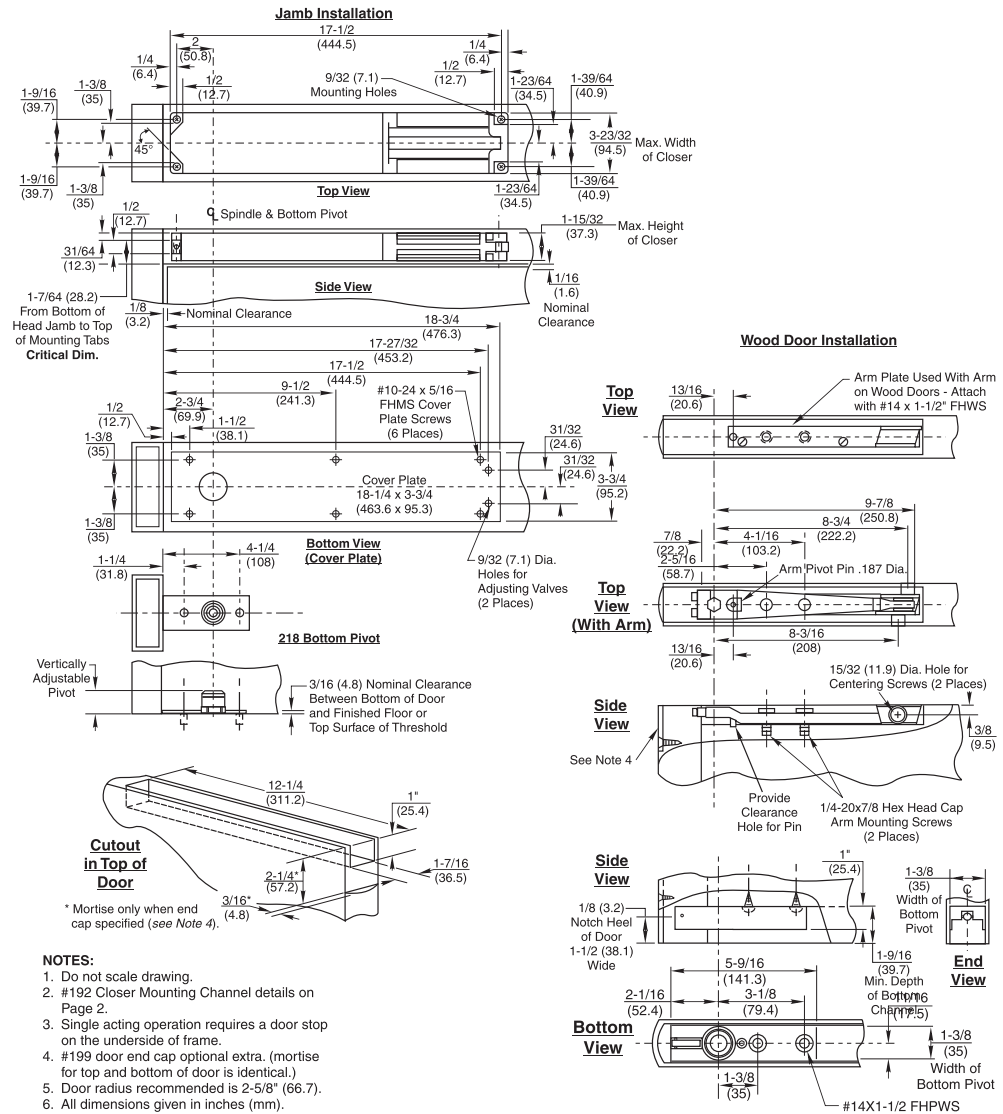

Rixson Specialty Door Controls

www.rixson.com

866-474-9766 Technical Department

