



**TRADEMARK
HARDWARE**

WORLD OF QUALITY HARDWARE


Template - V7212V

Note:
Dimensions in () are in
millimeters.

RIGHT HAND DOOR & PIVOT SHOWN.
LEFT HAND OPPOSITE

NOTES:

1. INSTALLER MUST VERIFY THAT CENTERLINE OF THE TOP PIVOT POINT LINES UP WITH THE CENTERLINE OF THE BOTTOM PIVOT POINT.
2. BOTTOM PIVOT SET SHOULD BE MOUNTED FIRST IN MOST INSTALLATIONS.
3. HEEL EDGE OF DOOR MUST BE BEVELED $1/8"$ IN $2"$ AS SHOWN.
4. PIVOTS MFG. TO ACCEPT $1/4-20 \times 3/4$ FPHMS OR $\#14 \times 1-1/2$ FPHWS.
5. REINFORCING PER ANSI/SDI-100 RECOMMENDED FOR HOLLOW METAL DOORS & FRAMES.

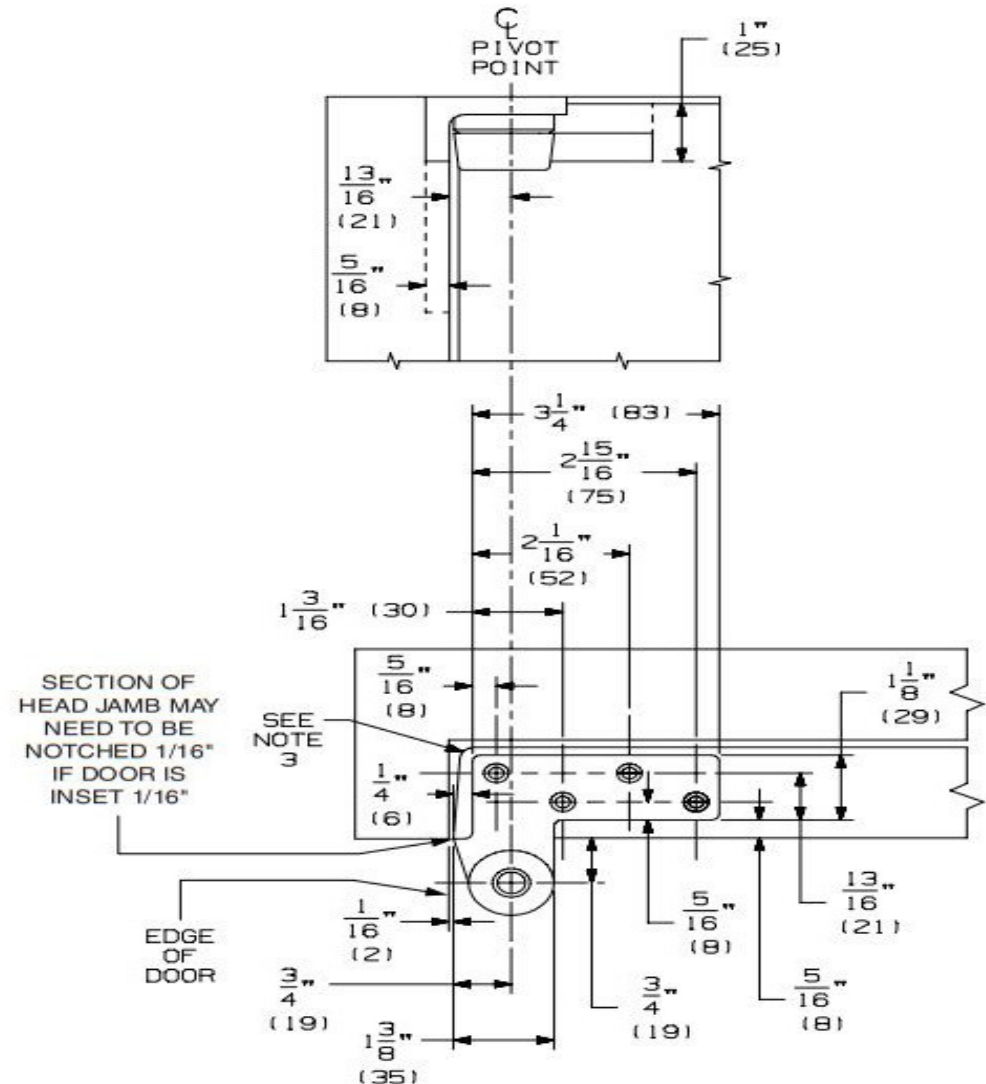

www.tmhardware.com



845-388-1300



845-388-1388



sales@tmhardware.com




TRADEMARK HARDWARE

WORLD OF QUALITY HARDWARE

Template - V7212V

RIGHT HAND DOOR & PIVOT SHOWN.
LEFT HAND OPPOSITE

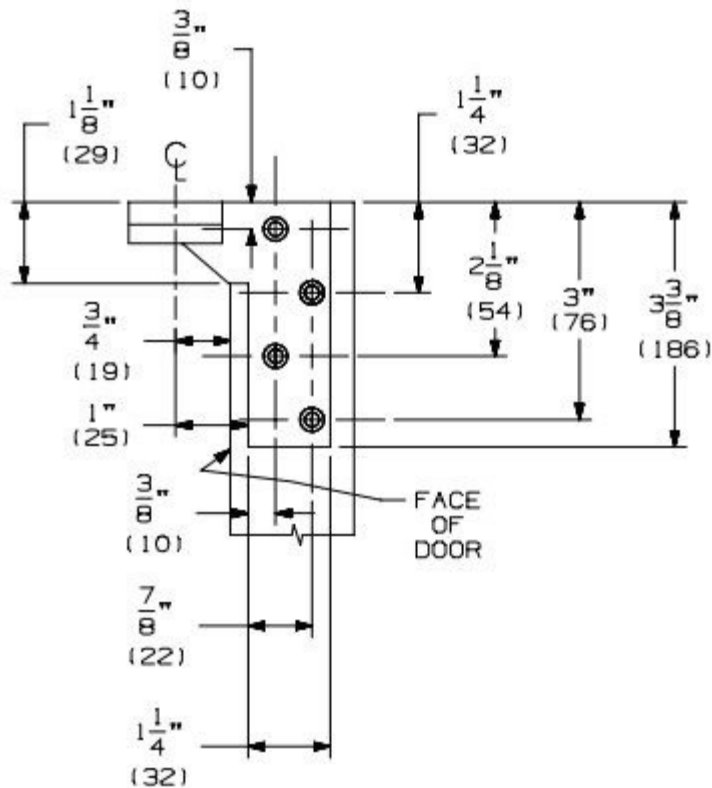


MAX. DOOR WEIGHT - 200 LBS

RIGHT HAND DOOR & PIVOT
SHOWN. LEFT HAND OPPOSITE

NOTES:

1. INSTALLER MUST VERIFY THAT CENTERLINE OF THE TOP PIVOT POINT LINES UP WITH THE CENTERLINE OF THE BOTTOM PIVOT POINT.
2. BOTTOM PIVOT SET SHOULD BE MOUNTED FIRST IN MOST INSTALLATIONS.
3. HEEL EDGE OF DOOR MUST BE BEVELED 1/8" IN 2" AS SHOWN.
4. PIVOTS MFG. TO ACCEPT 1/4-20 X 3/4 FPHMS OR #14 X 1-1/2 FPHWS.
5. IF JAMB LEAF IS INSTALLED ON THE TOP OF THRESHOLD ALLOW FOR THRESHOLD HEIGHT WHEN PREPARING FRAME AND DOOR LEAF.
6. BOTTOM PIVOT HAS VERTICAL HEIGHT ADJUSTMENT AND WILL ACCOMMODATE 3/16" TO 3/4" DOOR CLEARANCE. DEPTH OF DOOR MORTISE DETERMINES CLEARANCE 5/8" MAX. THRESHOLD.
7. REINFORCING PER ANSI/SDI-100 RECOMMENDED FOR HOLLOW METAL DOORS & FRAMES.

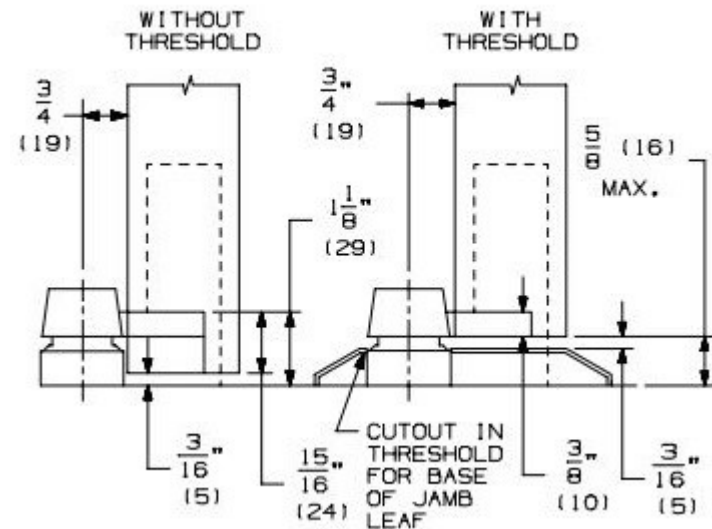

www.tmhardware.com



845-388-1300



845-388-1388




sales@tmhardware.com



**TRADEMARK
HARDWARE**

WORLD OF QUALITY HARDWARE

Template - V7212V

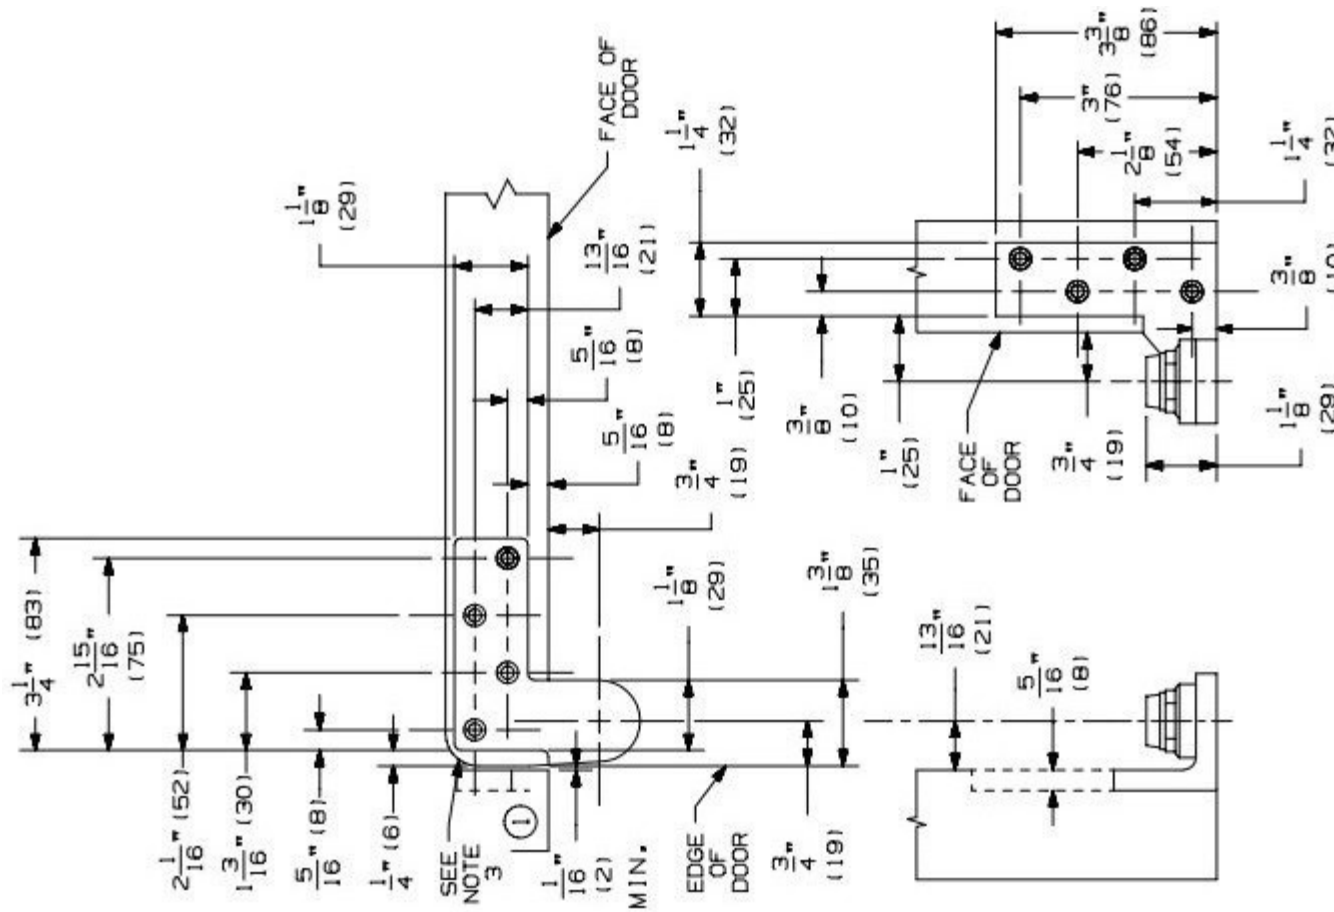

www.tmhardware.com



845-388-1300



845-388-1388



sales@tmhardware.com