



26364-00


3/4" Intermediate Pivot

7215/15F, 7226/26F, and 7227/27F



IVES

Installation Instructions

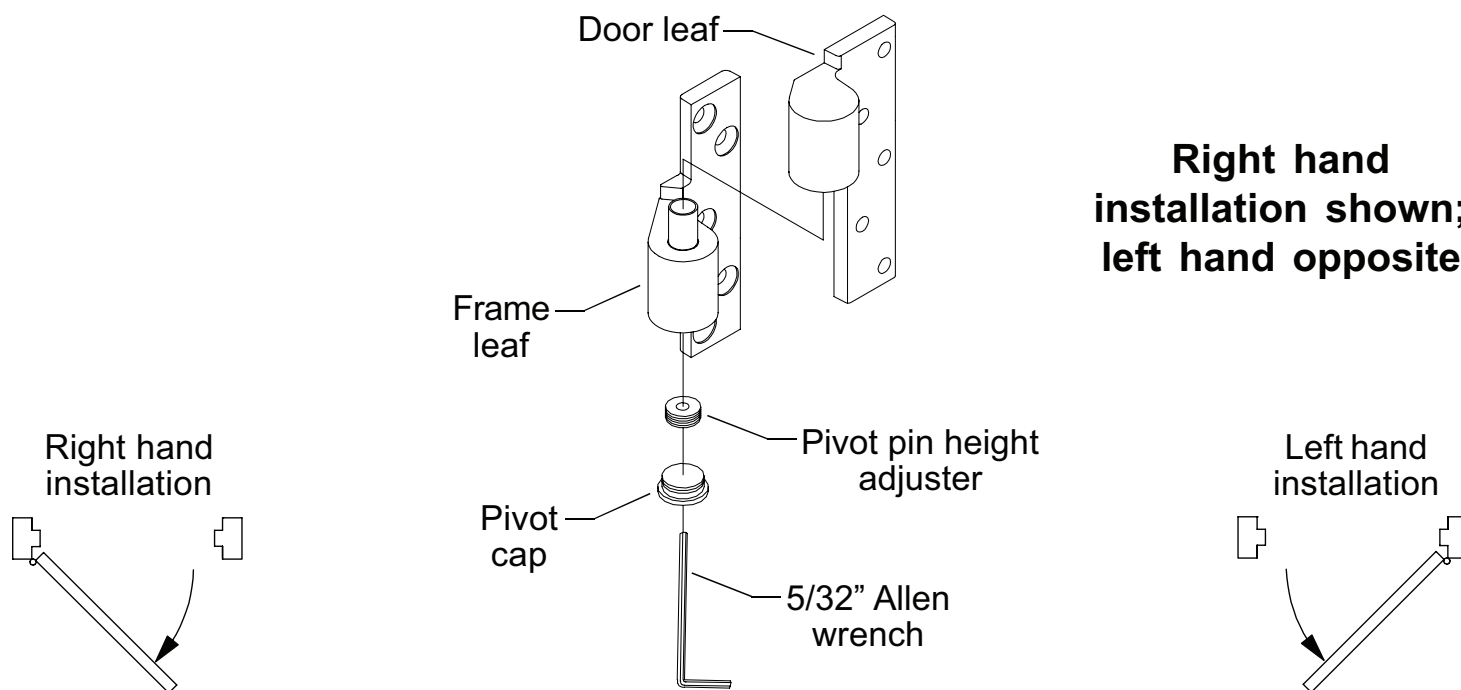

1. Prepare and mortise hinge stile of door and hinge side jamb to receive pivot set. Determine pivot location using dimensions on reverse side. The pivots are handed and must match hand of door. To determine hand of door and proper pivot position, see diagrams above. Install top and bottom pivot sets before installing intermediate pivot.
2. Locate, drill, and tap 1/4-20 mounting holes for metal door. Locate and drill pilot holes for #14 wood screws for wood door. Then hang door.
3. Open door about 90°. Install pivot leaves with 1/4-20 x 3/4" FHMS or #14 FHWS screws provided.
4. The door weight should be balanced between bottom and intermediate pivots. Refer to diagram above. To adjust intermediate pivot:
 - a. Use 5/32" Allen wrench to remove pivot cap from frame leaf.
 - b. Insert Allen wrench into pivot pin height adjuster.
 - c. Turn clockwise until pivot pin makes contact with steel ball inside door leaf.
 - d. Adjust carefully to balance the weight of the door.
5. Re-install pivot cap.

⚠ CAUTION ⚠

Improper pivot set installation can lead to personal injury or property damage. Follow all instructions carefully. For questions contact Technical Support at 1-877-671-7011.


⚠ NOTE ⚠

It is very important for installer to verify that center line of intermediate pivot point lines up with center line of top and bottom pivot points before final installation. Both door and frame pivot leaves located from face of door. Intermediate pivots should be evenly spaced between top and bottom pivots. Heel edge of door must be beveled 1/8" in 2".



Frame Leaf

Door Leaf

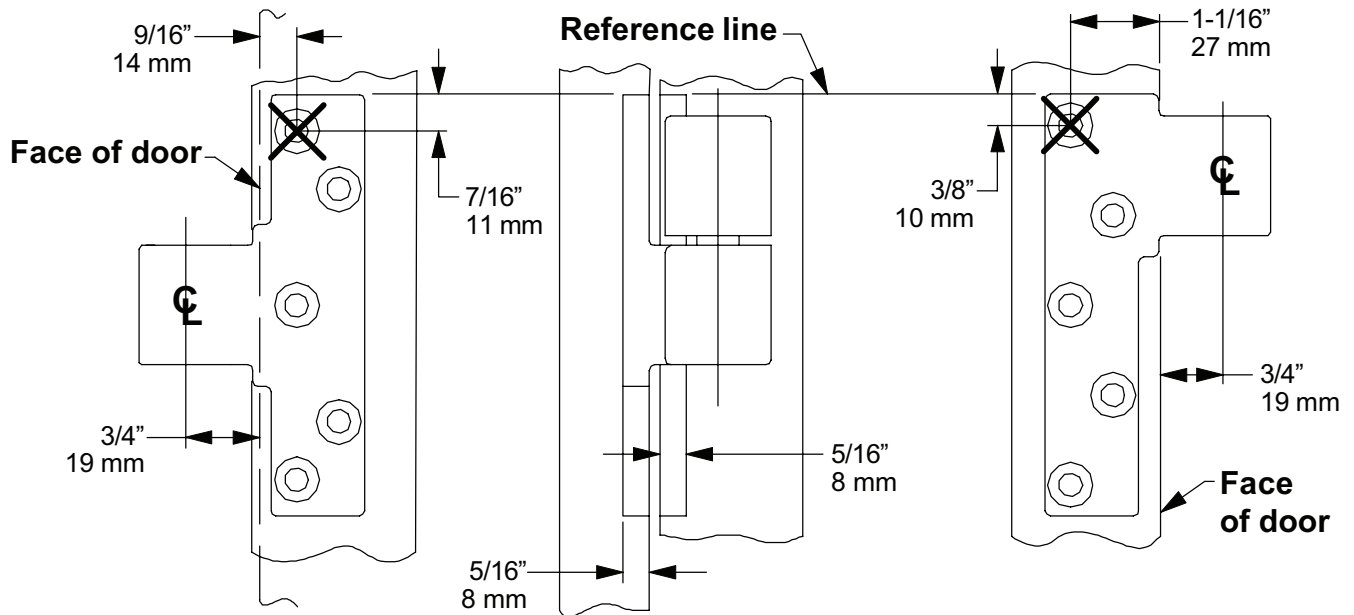

**Right hand installation shown;
left hand opposite**

Customer Service

1-877-671-7011

www.allegion.com



© Allegion 2014
Printed in U.S.A.
26364-00 Rev. 01/14-b