



TRADEMARK HARDWARE

WORLD OF QUALITY HARDWARE




Template - V7245F

Note:
Dimensions in ()
are in millimeters.

RIGHT HAND DOOR & PIVOT
SHOWN. LEFT HAND OPPOSITE

NOTES:

1. INSTALLER MUST VERIFY THAT CENTERLINE OF TOP PIVOT POINT LINES UP WITH THE CENTERLINE OF BOTTOM PIVOT POINT.
2. BOTTOM PIVOT SET SHOULD BE MOUNTED FIRST IN MOST INSTALLATIONS.
3. HEEL EDGE OF DOOR MUST BE BEVELED $1/8"$ IN $2"$ AS SHOWN.
4. PIVOTS MFG. TO ACCEPT $1/4-20 \times 3/4$ FPHMS OR $\#14 \times 1-1/2$ FPHWS.
5. TEMPLATING FOR DOOR LEAF & FRAME LEAF IS IDENTICAL.
6. REINFORCING PER ANSI/SOI-100 RECOMMENDED FOR HOLLOW METAL DOORS & FRAMES.

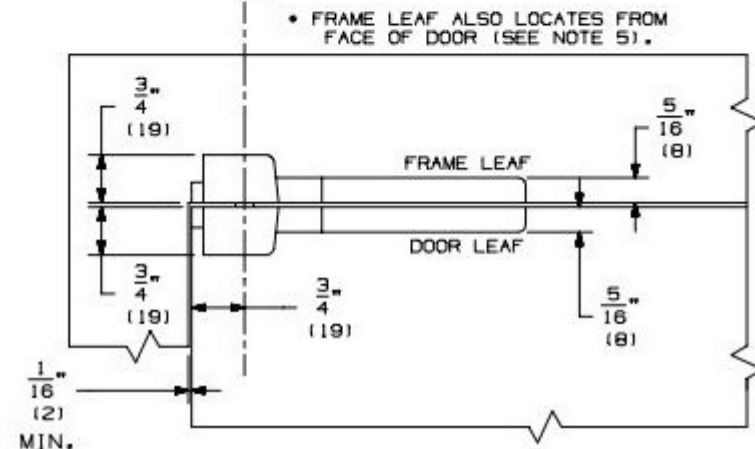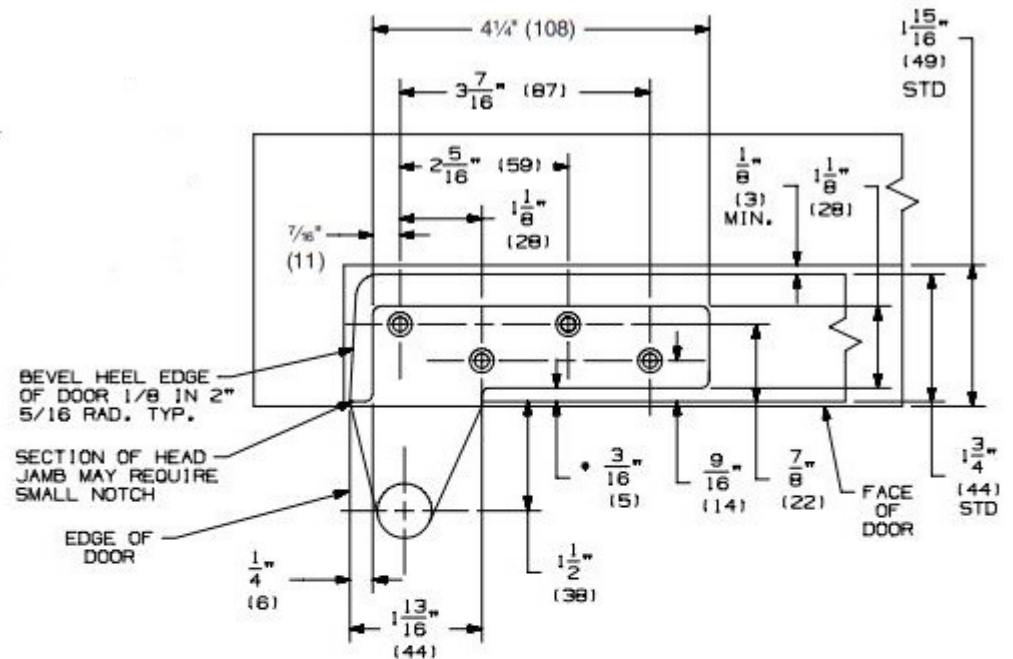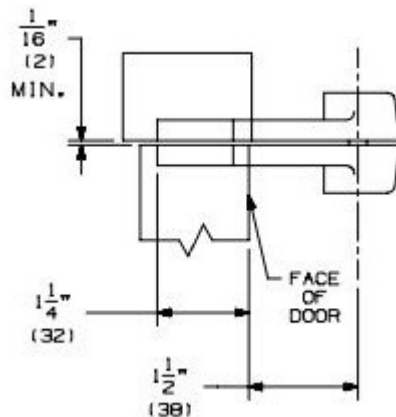

www.tmhardware.com



845-388-1300



845-388-1388



sales@tmhardware.com



TRADEMARK HARDWARE

WORLD OF QUALITY HARDWARE

MAX. DOOR WEIGHT - 500 LBS

RIGHT HAND DOOR & PIVOT SHOWN.
LEFT HAND OPPOSITE

NOTES:

1. INSTALLER MUST VERIFY THAT CENTERLINE OF THE TOP PIVOT POINT LINES UP WITH THE CENTERLINE OF THE BOTTOM PIVOT POINT.
2. BOTTOM PIVOT SET SHOULD BE MOUNTED FIRST IN MOST INSTALLATIONS.
3. HEEL EDGE OF DOOR MUST BE BEVELED 1/8" IN 2" AS SHOWN.
4. PIVOTS MFG. TO ACCEPT 1/4-20 X 3/4 FPHMS OR #14 X 1-1/2 FPHMS.
5. BOTTOM PIVOT HAS VERTICAL HEIGHT ADJUSTMENT AND WILL ACCOMMODATE 3/16" TO 3/4" DOOR CLEARANCE. DEPTH OF DOOR MORTISE DETERMINES CLEARANCE 1/2" MAX. THRESHOLD.
6. REINFORCING PER ANSI/SDI-100 RECOMMENDED FOR HOLLOW METAL DOORS & FRAMES.

