


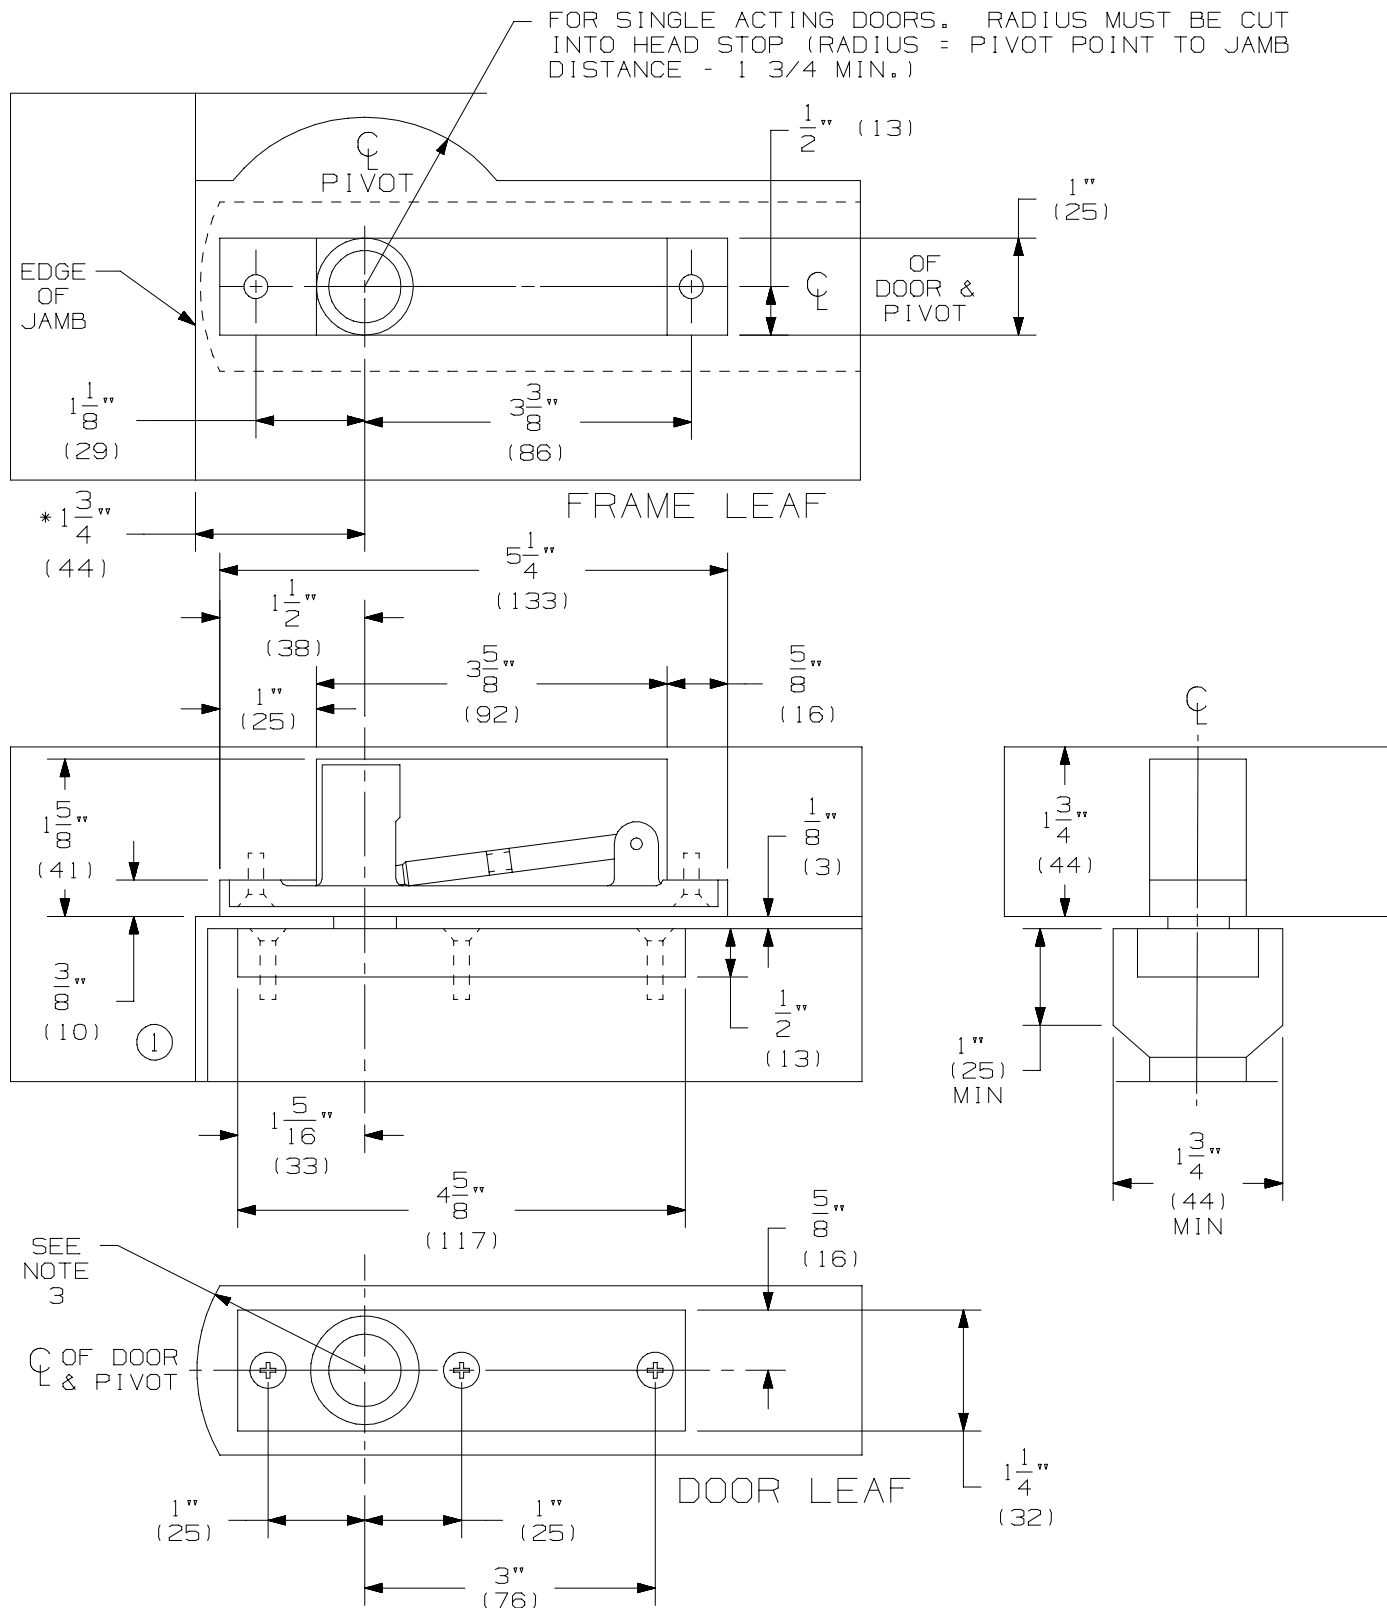

NOTES:

1. INSTALLER MUST VERIFY THAT CENTERLINE OF TOP PIVOT POINT LINES UP WITH THE CENTERLINE OF BOTTOM PIVOT POINT.
2. BOTTOM PIVOT SET SHOULD BE MOUNTED FIRST IN MOST INSTALLATIONS.
3. RADIUS OF HEEL EDGE OF DOOR MUST NOT EXCEED PIVOT POINT TO JAMB DISTANCE. STANDARD 2" RADIUS IS SHOWN.
4. PIVOTS MFG. TO ACCEPT 1/4-20 X 3/4 FPHMS OR #14 X 1-1/2 FPHWS.
- * 5. PIVOT CENTER MAY BE VARIED AS DESIRED. MINIMUM DISTANCE IS 1 3/4 AS SHOWN.
6. REINFORCING PER ANSI/SDI-100 RECOMMENDED FOR HOLLOW METAL DOORS & FRAMES.

IVES


**7256 PIVOT SET
7256 TOP PIVOT**



NOTE: DIMENSIONS IN () ARE IN MILLIMETERS

TEMPLATE
NUMBER: **INST.7256_B PG1**

© 2014 Allegion
Printed in U.S.A.
INST_7256 Rev. 12/14-b

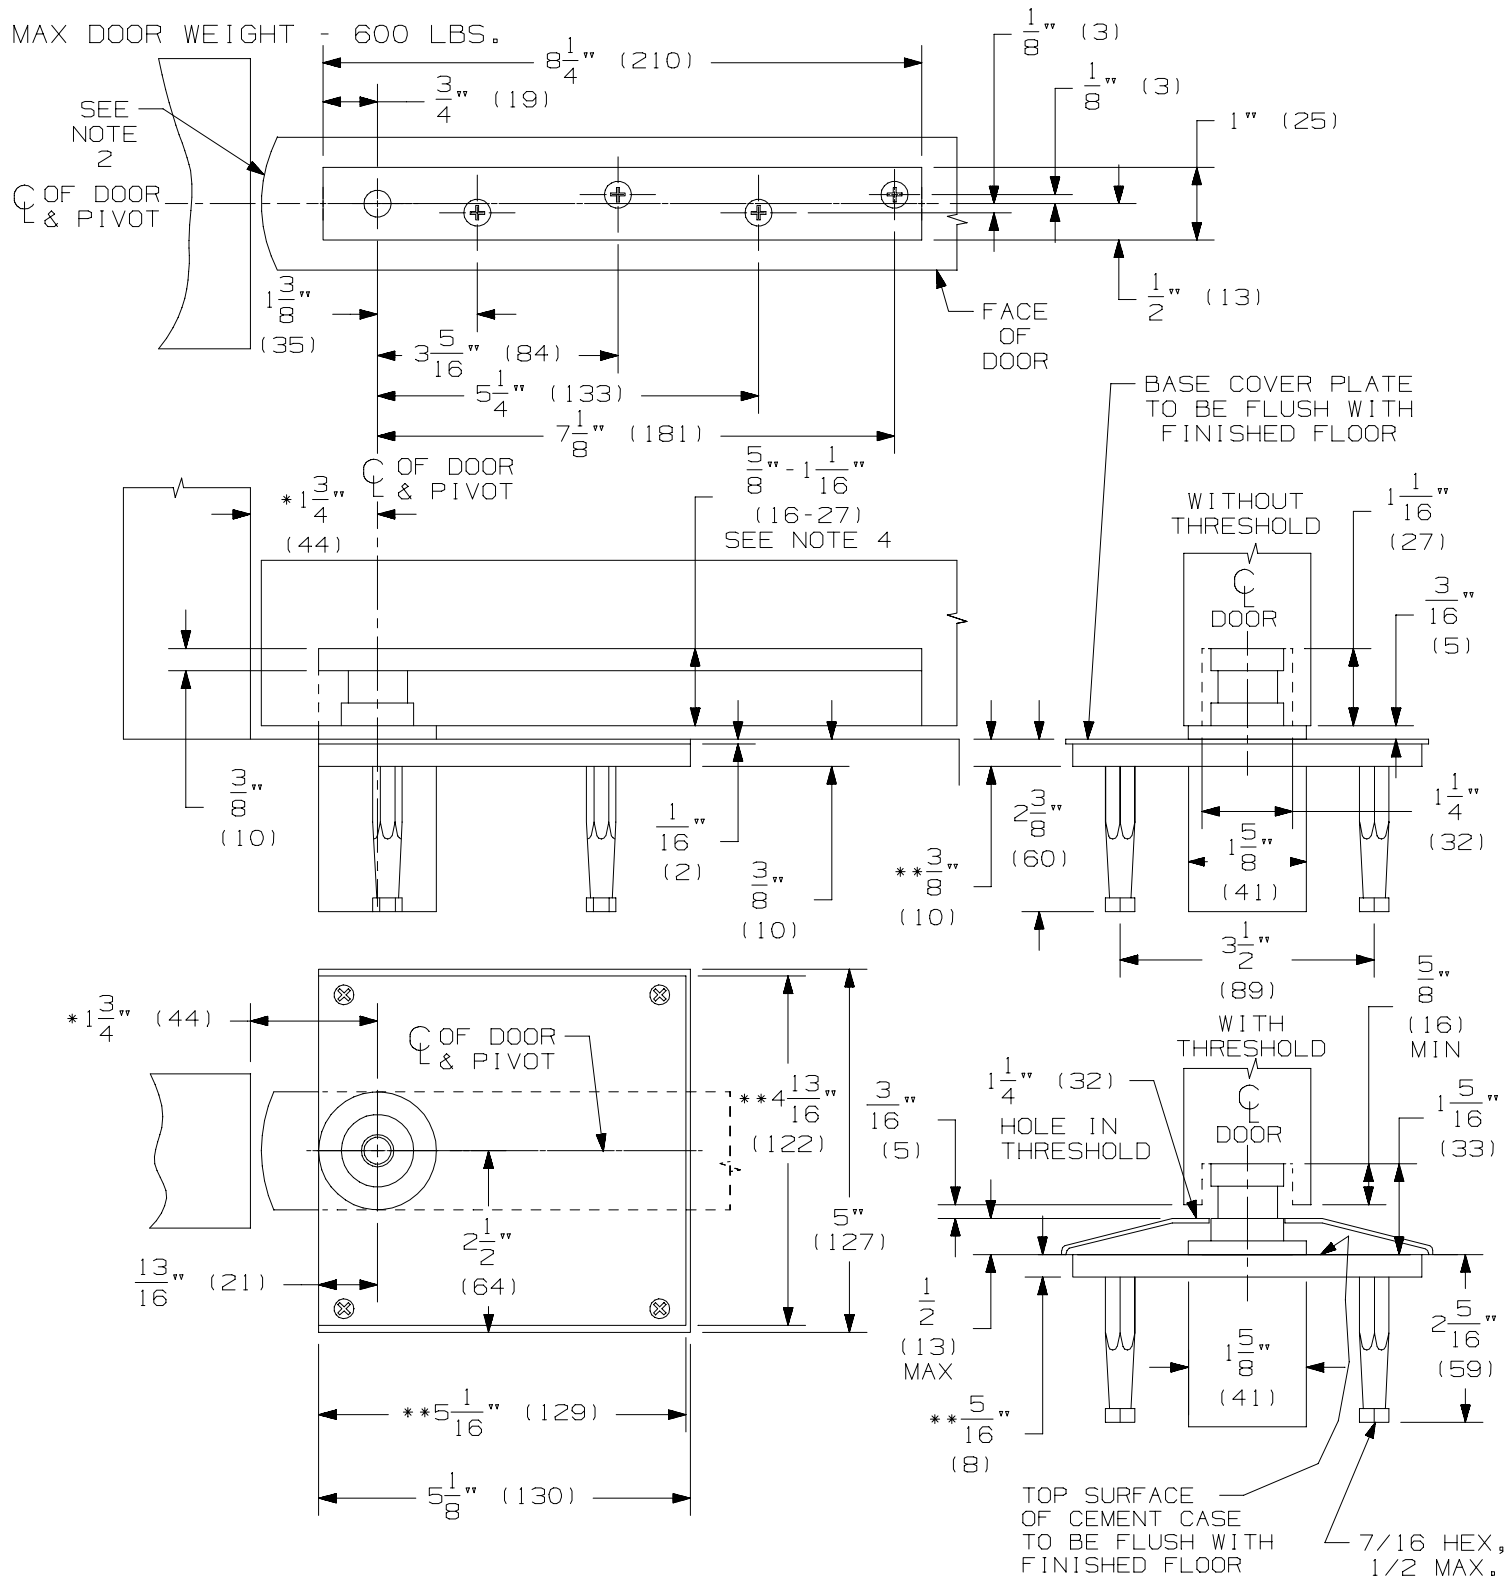

IVES

**7256 PIVOT SET
7256 BOTTOM PIVOT**



NOTE: DIMENSIONS IN () ARE IN MILLIMETERS

TEMPLATE
NUMBER: **INST.7256_B PG2**

© 2015 Allegion
INST_7256 Rev. 01/15-b