



**Trademark
HARDWARE**

PRODUCT SPECS


**WP ABRASIVE CAST
Safety Treads & Nosings**

Specify Abrasive Castings For:

- Maximum Durability in Rough Use
- Indoor or Outdoor Use
- Resistance to Unusually Corrosive Environments
- Anti-Slip Safety Properties
- Ready to Install Convenience
- New Construction or Existing Buildings

TREADS, NOSINGS AND THRESHOLDS FOR PROTECTION AND LONG WEAR

Generally installed full stringer to stringer length, less $\frac{1}{8}$ " (3.05 mm) clearance.

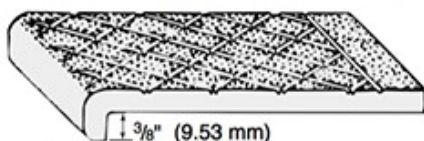

$\frac{3}{8}$ " (9.53 mm)
 $\frac{5}{16}$ " (7.94 mm)

TYPE 101SP – Nose $\frac{3}{8}$ " (9.53 mm).
Chief use: as nosings on steel-pan concrete-filled stairs or superimposed on existing steps.



AVAILABLE WITH CONCEALED INTEGRAL ANCHORS, WING ANCHORS, OR COUNTERSUNK HOLES

	Alumogrit	Ferrogrit
Material	Cast Aluminum	Cast Iron
Thickness	5/16" or 3.125" Thick	5/16" or 3.125" Thick
Max. Width	6.00" Max Width	6.00" Max Width
Abrasive	#20 Virgin Grain Alum. Oxide	#20 Virgin Grain Alum. Oxide
Max. Length	6 FT Maximum Length	6 FT Maximum Length
Anti-Slip Protection	Excellent	Excellent
Surface	Abrasive Cross-Hatch- standard	Abrasive Cross-Hatch- standard
Corrosion Resistance	Excellent	Not Recommended for Corrosive Environments
Paint	Not Painted	One coat Shop-Black Paint
Fasteners	Countersunk Holes, Concealed Integral Anchors, Wing Anchors	Countersunk Holes, Concealed Integral Anchors, Wing Anchors
New/Old Construction	New Construction or Existing Buildings	New Construction or Existing Buildings

**SKU: WAG101SP
WFG101SP**

**Trademark
HARDWARE**

148 Horton Drive, Suite B
Monsey, NY 10952

Phone: 845-388-1300
Fax: 845-388-1388

www.TMHardware.com
sales@tmhardware.com