



**Trademark
HARDWARE**


PRODUCT SPECS



Specify Abrasive Castings For:

- Maximum Durability in Rough Use
- Indoor or Outdoor Use
- Resistance to Unusually Corrosive Environments
- Anti-Slip Safety Properties
- Ready to Install Convenience
- New Construction or Existing Buildings

TREADS, NOSINGS AND THRESHOLDS FOR PROTECTION AND LONG WEAR

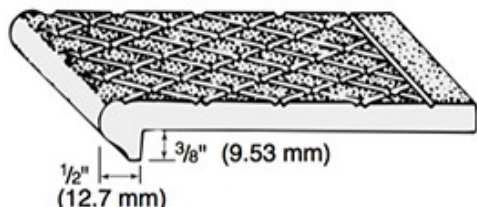

TYPE 102 – Nose $\frac{1}{2}$ " x $\frac{3}{8}$ ".
(12.7 mm x 9.53 mm). Chief use: as nosings
on steel-pan stairs. Can also be used
structurally with bent-plate risers.



AVAILABLE WITH CONCEALED INTEGRAL ANCHORS, WING ANCHORS, OR COUNTERSUNK HOLES

	Alumogrit	Ferrogrit
Material	Cast Aluminum	Cast Iron
Thickness	5/16" or 3.125" Thick	5/16" or 3.125" Thick
Max. Width	6.00" Max Width	6.00" Max Width
Abrasive	#20 Virgin Grain Alum. Oxide	#20 Virgin Grain Alum. Oxide
Max. Length	8" 6" Maximum Length	8" 6" Maximum Length
Anti-Slip Protection	Excellent	Excellent
Surface	Abrasive Cross-Hatch- standard	Abrasive Cross-Hatch- standard
Corrosion Resistance	Excellent	Not Recommended for Corrosive Environments
Paint	Not Painted	One coat Shop-Black Paint
Fasteners	Countersunk Holes, Concealed Integral Anchors, Wing Anchors	Countersunk Holes, Concealed Integral Anchors, Wing Anchors
New/Old Construction	New Construction or Existing Buildings	New Construction or Existing Buildings

**SKU: WAG102
WFG102**

**Trademark
HARDWARE**

148 Horton Drive, Suite B
Monsey, NY 10952

Phone: 845-388-1300
Fax: 845-388-1388

www.TMHardware.com
sales@tmhardware.com