



**Trademark  
HARDWARE**


# PRODUCT SPECS

**WP ABRASIVE CAST  
Safety Treads & Nosings**


**Specify Abrasive Castings For:**

- Maximum Durability in Rough Use
- Indoor or Outdoor Use
- Resistance to Unusually Corrosive Environments
- Anti-Slip Safety Properties
- Ready to Install Convenience
- New Construction or Existing Buildings

**TREADS, NOSINGS AND THRESHOLDS FOR PROTECTION AND LONG WEAR**

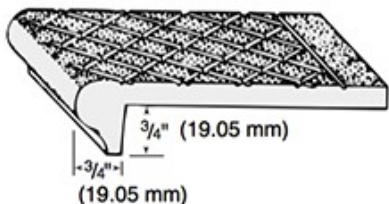

**TYPE 103** – Nose  $\frac{3}{4}$ " x  $\frac{3}{4}$ ".  
(19.05 mm x 19.05 mm). Chief use: as structural treads with bent-plate risers or as nosings full width of stair.

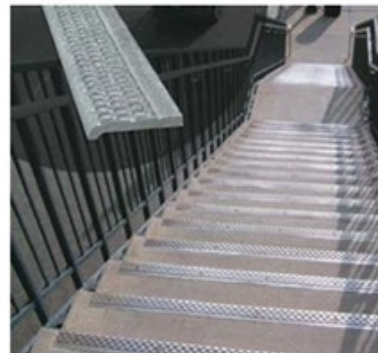

**AVAILABLE WITH CONCEALED INTEGRAL ANCHORS, WING ANCHORS, OR COUNTERSUNK HOLES**

	Alumogrit	Ferrogrit
Material	Cast Aluminum	Cast Iron
Thickness	5/16" or 3.125" Thick	5/16" or 3.125" Thick
Max. Width	6.00" Max Width	6.00" Max Width
Abrasive	#20 Virgin Grain Alum. Oxide	#20 Virgin Grain Alum. Oxide
Max. Length	8" 6" Maximum Length	8" 6" Maximum Length
Anti-Slip Protection	Excellent	Excellent
Surface	Abrasive Cross-Hatch- standard	Abrasive Cross-Hatch- standard
Corrosion Resistance	Excellent	Not Recommended for Corrosive Environments
Paint	Not Painted	One coat Shop-Black Paint
Fasteners	Countersunk Holes, Concealed Integral Anchors, Wing Anchors	Countersunk Holes, Concealed Integral Anchors, Wing Anchors
New/Old Construction	New Construction or Existing Buildings	New Construction or Existing Buildings

**SKU: WAG103  
WFG103**

**Trademark  
HARDWARE**

148 Horton Drive, Suite B  
Monsey, NY 10952

Phone: 845-388-1300  
Fax: 845-388-1388

www.TMHardware.com  
sales@tmhardware.com