



Salice Full Extension

→ F70 Smove




- > Weight capacity: Dynamic: 70 kg (154 lbs.)
Static: 77 kg (170 lbs.)
- > Full extension with a synchronized mechanism
- > Fully integrated soft close mechanism
- > Elongated holes for depth and height adjustment
- > Adjustable clips allow for easy drawer insertion and removal
- > Tool-less height adjustments: +2.5 mm (3/32")
- > Tool-less side adjustments: ±1.5 mm (1/16")
- > Tool-less depth adjustments: +/-3 mm (1/8")
- > For 12–16 mm (1/2"–5/8") drawer box
- > 100% made in Italy
- > Material: Steel; Finish: bright zinc-plated

Drawer dimensions and drilling Full-extension runner for 12 mm (1/2") to 16 mm (5/8") drawer material

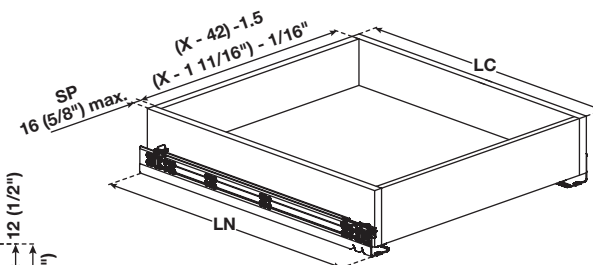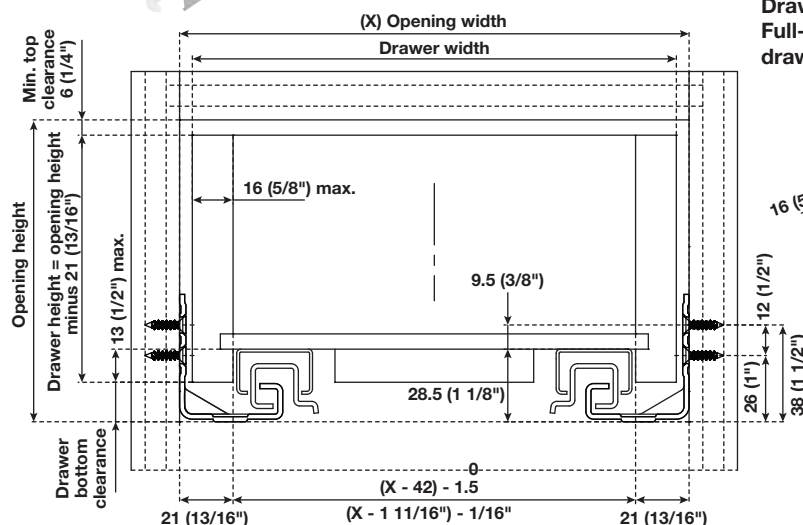

SP = Drawer side thickness
LN = Nominal runner length
LC = Drawer length

Drawer back preparation



For Face Frame Construction

Drawer length LC	Runner length LN	Min. inside cabinet depth w/ metal socket	Max. inside cabinet depth w/ metal socket	Min. inside cabinet depth	Item No.
381 (15")	392 (15 7/16")	402 (15 27/32")	446 (17 9/16")	401 (15 25/32")	421.23.401
457 (18")	468 (18 13/32")	480 (18 27/32")	522 (20 9/16")	477 (18 25/32")	421.23.402
533 (21")	544 (21 13/32")	557 (21 29/32")	598 (23 17/32")	554 (21 13/16")	421.23.403

For Frameless Construction

Drawer length LC	Runner length LN	Min. inside cabinet depth	Item No.
457 (18")	468 (18 13/32")	480 (18 27/32")	421.23.412
533 (21")	544 (21 13/32")	554 (21 13/16")	421.23.413
610 (24")	621 (24 15/32")	630 (24 25/32")	421.23.414
686 (27")	697 (27 7/16")	709 (27 29/32")	421.23.415
762 (30")	773 (30 7/16")	786 (30 15/16")	421.23.416

→ Tilt Adjustment Levers*



> Material: Plastic

Item No.
421.23.009

Supplied With Right/left clips

→ Clips, required



- > Standard mount
- > Tool-free lateral and depth adjustments
- > Pre-drilled Ø2.5 mm (3/32") hole is recommended
- > Material: Plastic/Steel

Version	Item No.
Without flange	421.23.006
With flange	421.23.007

Supplied With Right/left clips