

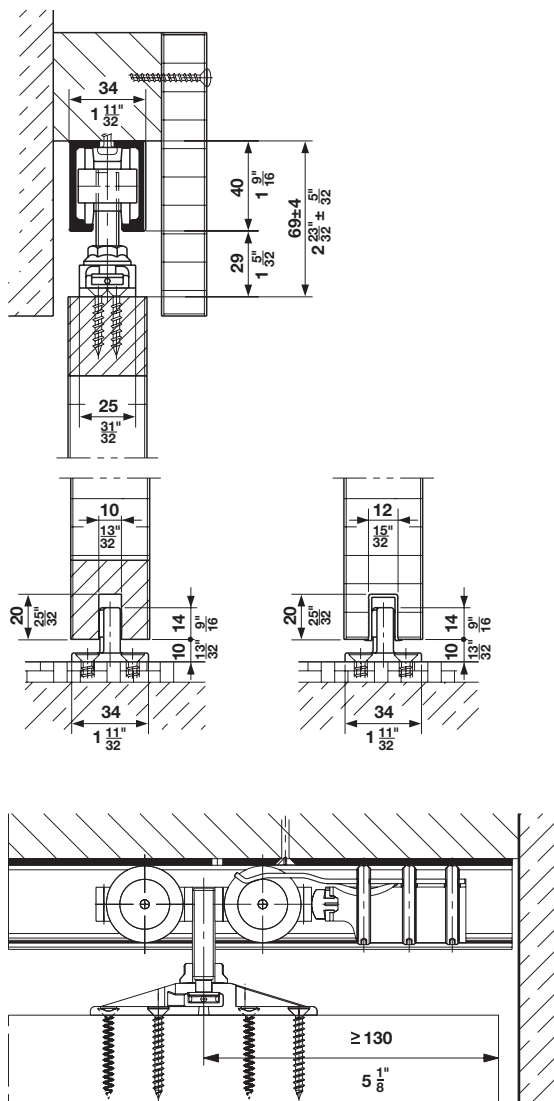
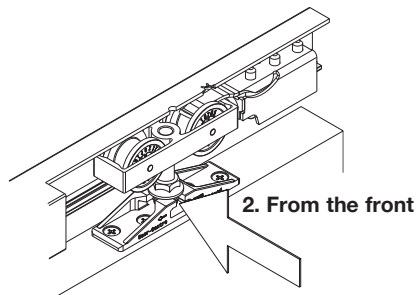
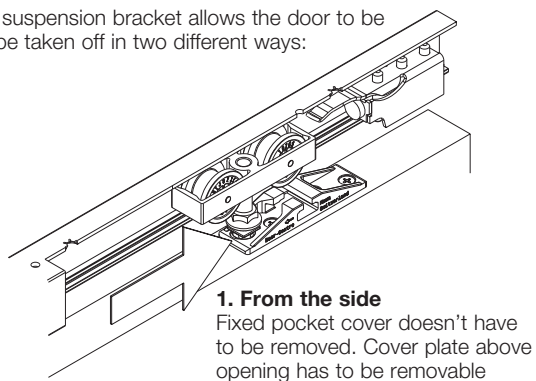
Hawa Junior 80 Z



- > For 1 and 2 sliding wood doors
- > Door weight: max. 80 kg (176 lbs.)
- > Door height: max. 4 m (13' 1 1/2")
- > Door width: max. 3 m (9' 10 1/8")
- > Door thickness: min. 26 mm (1")
- > Smooth, quiet operation
- > Outstanding durability
- > Rattle-free bottom guide
- > Simple installation
- > Special two-way suspension
- > Vertically and laterally adjustable
- > Door stop with adjustable retention spring

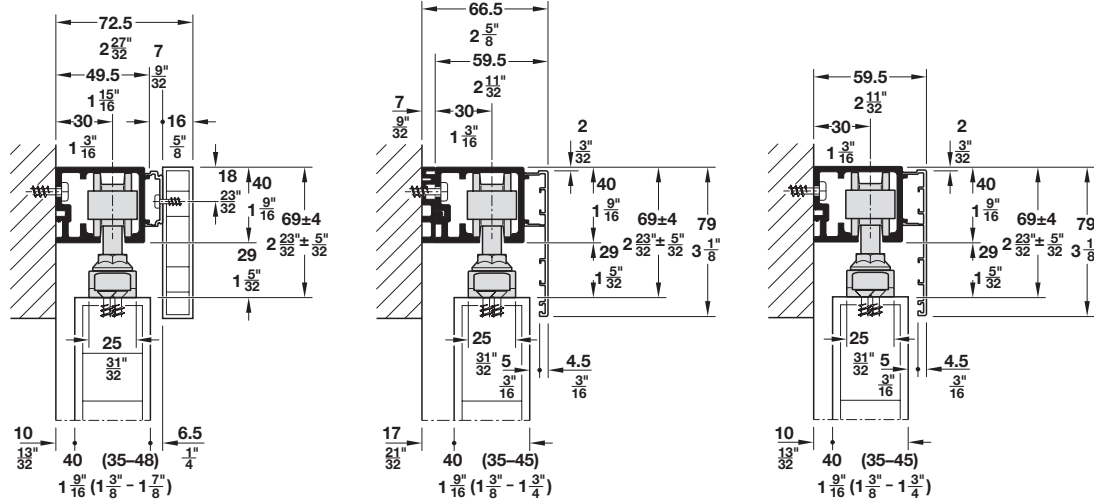


The two-way suspension bracket allows the door to be hung and to be taken off in two different ways:

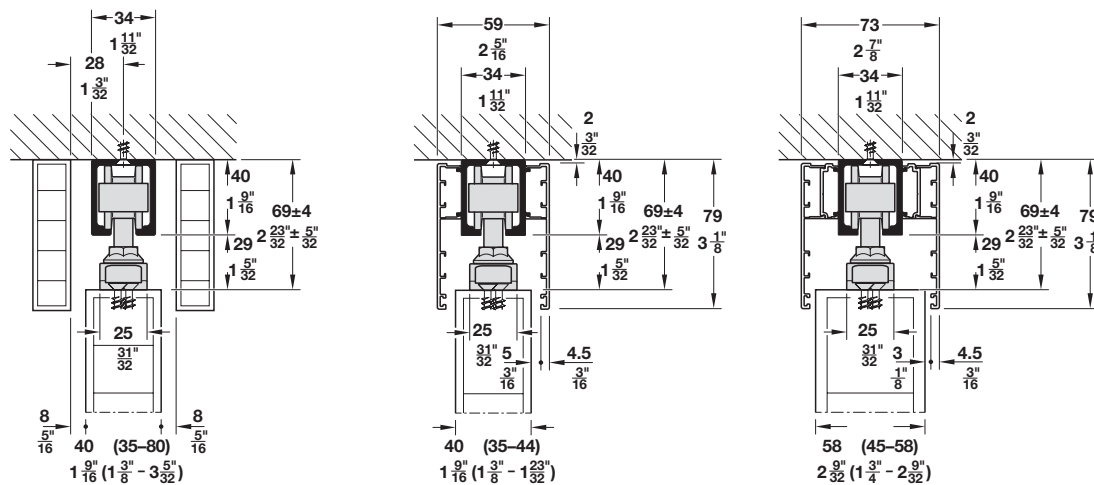


Mounting Options for Hawa Junior 80 Z

Wall mounting



Ceiling installation



Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Hawa Junior 80 Z Sets

	Model	Door weight	Supplied with	Item No.
For 1 sliding door without upper track	Junior 80 Z with 1 track stopper	≤80 kg (176 lbs.)	2 running gears 2 suspension plates incl. suspension M10 bolts, set nuts, and mounting screws 1 track stopper with retaining spring 1 wall buffer 1 rattle-free floor guide 1 height adjusting pin	940.80.001
	Junior 80 Z with 2 track stoppers	≤80 kg (176 lbs.)	2 running gears 2 suspension plates incl. suspension M10 bolts, set nuts, and mounting screws 2 track stoppers with retaining springs 1 wall buffer 1 rattle-free floor guide 1 height adjusting pin	940.80.015

Note

Order 2 sets for a bi-parting sliding door application.

→ Complete Sets











	Door panel width	Track length	Supplied with	Item No.
For 1 sliding door, includes upper tracks	Up to 700 mm (27 9/16")	1.4 m (4' 7 1/8")	1 fitting set 940.80.001 and 1 upper track 940.80.140	407.59.144
	Up to 800 mm (31 1/2")	1.6 m (5' 3")	1 fitting set 940.80.001 and 1 upper track 940.80.160	407.59.162
	Up to 900 mm (35 7/16")	1.8 m (5' 10 7/8")	1 fitting set 940.80.001 and 1 upper track 940.80.180	407.59.180
	Up to 1000 mm (39 3/8")	2 m (6' 6 3/4")	1 fitting set 940.80.001 and 1 upper track 940.80.200	407.59.206
	Up to 1100 mm (43 5/16")	2.2 m (7' 2 5/8")	1 fitting set 940.80.001 and 1 upper track 940.80.220	407.59.224
	Up to 1250 mm (49 3/16")	2.5 m (8' 2 7/16")	1 fitting set 940.80.001 and 1 upper track 940.80.250	407.59.251

Hawa confort guides	page 1.232
Hawa angle profile	page 1.230
Futura pocket door kit	pages 1.226–1.227
Hawa SoundEx bracket	page 1.231
Pull handles	pages 2.3–2.29
Flush pulls	pages 1.394–1.396
Sliding door locks	pages 1.389–1.394



Hawa Junior 80 Z

→ Upper Tracks and Accessories

Description		Material	Finish	Length	Version	Item No.
Upper track, pre-drilled		Aluminum	clear anodized	1.4 m (4' 7 1/8")	–	940.80.140
				1.6 m (5' 3")	–	940.80.160
				1.8 m (5' 10 7/8")	–	940.80.180
				2 m (6' 6 3/4")	–	940.80.200
				2.2 m (7' 2 5/8")	–	940.80.220
				2.5 m (8' 2 7/16")	–	940.80.250
				3 m (9' 10 1/8")	–	940.80.300
				4 m (13' 1 1/2")	–	940.80.400
Upper track, wall mounted, pre-drilled, for wood and aluminum fascia		Aluminum	clear anodized	6 m (19' 8 1/4")	–	940.80.600
				2 m (6' 6 3/4")	–	941.04.600
				2.5 m (8' 2 7/16")	–	941.04.601
				3 m (9' 10 1/8")	–	941.04.602
Upper track, top mounted, pre-drilled, for wood and aluminum fascia		Aluminum	clear anodized	4 m (13' 1 1/2")	–	941.04.603
				6 m (19' 8 1/4")	–	941.04.604
				2 m (6' 6 3/4")	–	941.04.605
				2.5 m (8' 2 7/16")	–	941.04.606
Clip-on fascia, Height: 77 mm (3 1/32")		Aluminum	clear anodized	3 m (9' 10 1/8")	–	941.04.607
				4 m (13' 1 1/2")	–	941.04.608
				6 m (19' 8 1/4")	–	941.04.609
				2 m (6' 6 3/4")	–	941.04.700
Clip-on fascia, Height: 77 mm (3 1/32")		Aluminum	clear anodized	2.5 m (8' 2 7/16")	–	941.04.701
				3 m (9' 10 1/8")	–	941.04.702
				4 m (13' 1 1/2")	–	941.04.703
				6 m (19' 8 1/4")	–	941.04.704
Spacer profile for wall mounted tracks		Plastic	gray	2 m (6' 6 3/4")	–	941.13.220
End cap for clip-on fascia, Height: 77 mm (3 1/32")		Aluminum	clear anodized	59 mm (2 5/16")	Left	941.04.400
				59 mm (2 5/16")	Right	941.04.401
				66 mm (2 19/32")	Left	941.04.402
				66 mm (2 19/32")	Right	941.04.403
Clip for wood and aluminum fascia, mount every 400–600 mm (15 3/4"–23 5/8")		Aluminum	mill	97 mm (3 13/16")	–	940.60.065
Guide rail, glue-in type		Plastic	black	1.3 m (4' 3 3/16")	–	940.41.130
End cap for upper track, 940.80.series		Steel	chrome matt	–	–	940.80.021
Track stopper with adjustable retaining spring		–	–	–	–	941.04.300
SoftStop track stopper with adjustable retaining spring		–	–	–	–	941.04.301
SoftMove 80 soft close mechanism, maximum capacity 80 kg (176 lbs.)		–	–	–	–	940.80.046

Note

Each Hawa SoftMove 80 requires a track stopper. For applications that require a SoftMove in both directions either order the fitting set that includes two track stoppers or one additional track stopper. For additional information on SoftMove 80, see page **1.229**.

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.