



Hello!

Happy to know that you hold our new catalogue in your hands. We are proud and excited at the same time to introduce you to our innovations.

We are constantly strengthening our position as the top brand in the gate and fence hardware industry. As a true expert in the field, we only aim for the best. Not only with the infamous locks and keeps, but in the fast growing segment of Automation & Electronics as well.

Our R&D team, which is in continuous expansion, has once again developed highly disruptive products which will shake the market. Always with our strict requirements in mind: superb product quality, fast & easy installation, unprecedented reliability, beautiful aesthetics and with added value for you and your clients.

This year, a few innovations stand out of the crowd: the improved SlimStone-2 keypad with two internal relays, the Fifty- and Sixtylocks insert locks and the handy Lion-VTC drilling jig. All three demonstrate the continuous drive to do better and to keep innovating.

Customer service remains to reinforce our healthy partnership. Our 24h shipment, with a 98% delivery rate on time, is maybe one of the best examples.

Sit back, relax and get inspired. Happy exploring,

Mik Emmerechts CEO Locinox





Index

Gate closers Tiger 14 15 • Mammoth • Samson-2 17 • Lion 18 Rhino 19 • Verticlose-2 21 • Verticlose-2 Wall Automation & Electronics • SlimStone 26 • Electric keeps 28 • Electromagnetic locks 30 Electradrop 42 • Electric accessories 43 Power supplies 44 Turnstiles Turnitec 52 Access control modules 53 Locks • For swing gates 59 73 • For child safety gates • For sliding gates 76 Insert locks 80 Keeps • For swing gates 93 · For sliding gates 96 98 • For swimming pool gates For insert locks 101 Hinges • For industrial and ornamental gates 109 • For small gates 130 Dropbolts & Ground catchers • Dropbolts 138 Ground catchers 142 Gate catchers • Hot-dip galvanised gate catchers 146 • Aluminum gate catchers 147 Tools • Tools for locks & keeps 150 • Tools for gate closers 152 Accessories Handles 160 Adaptor plates 168 Cylinders 173 177 · Accessories for gates Security strips 181

Marketing tools

Locinox is an international trendsetter in the fencing and gate world.

Our products are designed specifically for you sector where innovation, quality and ease of installation make the difference

A growing team of professionals, with a single and in mind: to increase your efficiency!

Let's make hetter fences together



183

Our products

INNOVATION

A motivated team of engineers and prototypers work hard on a daily basis to further expand the Locinox range with new products.



You can find many, pioneering innovations in this catalogue.

INDUSTRIAL QUALITY

Locinox products are of industrial quality. They are tested extensively by our R&D department in the most extreme circumstances.



We test every product a minimum of 500,000 movements before bringing it to the market. Using Locinox products extend the life of your gates and fences!



WEATHERPROOF

High quality materials and surface treatments ready for years of outdoor use are a basic requirement. This is why Locinox only uses stainless steel and non-ferro metals as raw materials for its products.



We choose, whenever possible, hot-dip galvanisation as surface treatment to maintain high standards. This way, our products have a longer life cycle than cheaper alternatives.

EASE OF INSTALLATION

"Time is money", you will most probably agree. This is why our products are designed as such that installation happens very quickly and easy.



Thanks to the special tools, the patented Quick-Fix and the Plug & Play design - installation happens in a blink of an eye.

The pre-fitted Quick-Fix solution guarantees a lightning fast installation. This way, the products are mounted very firmly.





Our promises





MODULARITY

The products in our range are designed for maximum interchangeability. A multitude of combinations is possible to assure maximum flexibility according to your clients' needs.

Even after installation, our products can be easily adjusted and/or replaced.

CUSTOM ASSEMBLY

The modularity of our products allows you to choose from many different configurations. Locinox will assemble every possible configuration upon request.



Moreover, our well-organised logistics guarantee a shipment of our catalogue products within 24h after your order. This will allow you to react quickly to your clients' needs!



AT YOUR SERVICE!

Our sales team is easy to reach and will give you a prompt reply by phone or e-mail in no less than 7 supported languages.

They will supply you the correct product information and are happy to help you in choosing the right solution for the given situation.

Your orders are confirmed on the same day!



Our concepts



AUTOMATED SWING GATE

SLIMSTONE Sturdy, weather resistant keypad (IP68) (p.26) | ELECTRADROP Motorised electrical dropbolt (p.42) OGS Off-centered ground stop and catch (p.142) | 1DBH- 90° 2-way adjustable bearing hinge (p.127) TRICONE Design led lighting for gates (IP54) (p.43)



SELF-CLOSING PEDESTRIAN GATE WITH ELECTRIC LOCK

SAMSON-2 (p.17)

Versatile hydraulic gate closer

GBMU4D (p.112)

4-way adjustable, 180° hinge

SLIMSTONE (p.26)

Sturdy, weather resistant keypad (IP68)

LIKQ U2 (p.69)

Electric lock - Fail Close

SHKL QF (p.95)

Security keep and gate stop

DVK (p.44)

 ${\sf Guiding\ cable}$

PB-1 + DC-POWER-12V-20W (p.17 + p.46)

Powerbox - Transformer housing (IP66) + Safety power supply 12 V and 13 V DC

TRICONE (p. 43)

Design led lighting for gates (IP54)







SELF-CLOSING PEDESTRIAN GATE WITH MAGNETIC LOCK

MAMMOTH-180 (p.15)

Hydraulic 180° gate closer and hinge in one

SLIMSTONE (p.26)

Sturdy, weather resistant keypad (IP68)

MAG (p.38)

Magnetic lock (600/1200 lbs) with integrated handles

DINO (p.126)


180° double bearing hinge with

2 x 13/16" adjustability

PB-1 + DC-POWER-12V-20W (p.17 + p.46)

Powerbox - Transformer housing (IP66) + Safety power supply 12 V and 13 V DC TRICONE (p.43)

Design led lighting for gates (IP54)

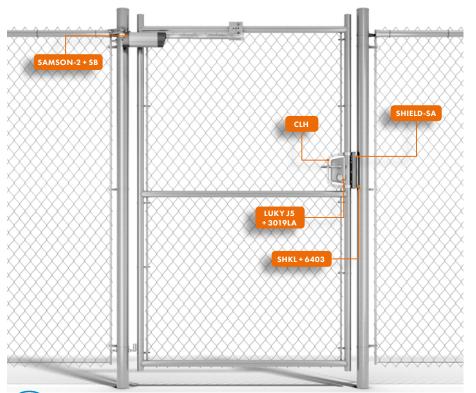

QUALITY & SAFE SOLUTIONS FOR ANY CHAIN LINK GATE

SAMSON-2 (p.17)

Strong 150° hydraulic gate closer for heavy gates up to 330 lbs

SB (p.171)

Galvanized bracket to mount Samson on chain link gates

LUKY J5 (p.61)

Gate lock with handles – includes 2 US Mortise cylinders

3019LA (p.186)

Round adaptor plate for locks 6403 (p.168)

Round adaptor plate for SH keeps

SHKL (p.95) Industrial stainless steel security keep

SHIELD-SH (p.170)

Aluminum vandal-proof anti pick

plate for SH keeps

CLH (p.169)

Chain link tension bar adapter for locks



Our latest Innovations





NEW QUICK-FIX

The highly improved stainless steel fixation bolt. This unique and patented system is fitted on most of the Locinox products. The innovative design ensures you can reuse it over and over. Thanks to the 2.200 lbs pulling resistance, everything is fixed very tight!

"Smart solutions, better fences"

Protecting what matters. Everyone wants to be safe, right? At home, on their job, at school, out when sporting, etc... Locinox provides that degree of security and comfort. As a Belgium based trendsetter, manufacturer and reputed market leader, we take care of your peace of mind.

Thanks to continuous innovation, thorough quality checks and efficient installation methods, Locinox is the right partner for your gate and fencing projects. Every product is designed and engineered with eye for detail, extreme weatherproofness and added value. All to guarantee an improved durability and lots of modularity and flexibility. Our products are determined to be your partner for the long run and ensure your project to stand out, for a very long time.

With every new innovation we're launching, quality, durability and user friendliness are key. We rely on the best components for the best possible solutions. Our test results don't lie - Locinox products stand the test of time!

Fixed in the post



Unscrewed for reuse







VERTICLOSE-2

Highly versatile gate closer with excellent features. The powerful Verticlose-2 is the perfect gate closer for both 90° and 180° hinge situations.




Toolbox with the required tools for a flawless installation of the Lion and Verticlose-2 gate closers. No more measuring: just fix, drill, install and ready. Highly recommended.



VERTICLOSE-2 WALL

Specially designed gate closer for wall mounting where the gate closer is positioned 90° in relation to the gate. The unique design of the arm allows it to turn around the wall or post, ensuring a large opening angle.

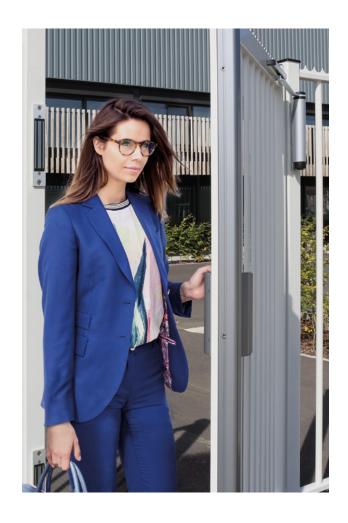





FIFTYLOCK

Prime insert lock with 100% stainless steel mechanism and 1-3/16" backset for profiles of 2" and more.





SIXTYLOCK

Prime insert lock with 100% stainless steel mechanism and 1-9/16" backset for profiles of 2-3/8" and more.



BOLTON4D

Bolt-on 4D hinge with Quick-Fix or through and through fixation. The BOLTON4D hinge is as of now also available in M 12 and M 16 version.



Loc-eshop



In a world where business never stops and where providing a fast service is crucial, Locinox is determined to stay ahead.

Order any of our products 24/7 thanks to the Loc-eshop.

Visit the Loc-eshop on www.locinox.com



order when it suits you

Guaranteed shipping within 24h







Gate closers

Hydraulic gate closers will transform any gate into a self-closing solution. Comfort, safety and peace of mind are guaranteed thanks to pure hydraulic power. High quality components ensure Locinox closers to be 100% weatherproof, maintenance-free and extremely durable. A constant and consistent functioning is guaranteed during an ice cold winter or a sweltering summer. The unique concept ensures an easy and efficient fixation thanks to the patented Quick-Fix system. Moreover, closing speed and final snap can be adjusted very precisely and 100% to your customers' wishes.



- 14 Tiger
- 15 Mammoth



- 17 Samson-2
- 18 Lion



- 19 Rhino
- 21 Verticlose-2
- 22 Verticlose-2 Wall




Cutting edge self-closing technology

1 ALWAYS A CONSTANT CLOSING SPEED FROM FREEZING WINTER TO SIZZLING SUMMER

If your gate closes too slow, children or pets could sneak through. If your gate closes too fast, it might become a problem for wheelchair users. A loud slamming gate is not only annoying for you or your neighbours, it's also harmful for your gates.

The Active Thermal System, our own cutting-edge development, guarantees a constant closing speed, regardless of the outside temperature.

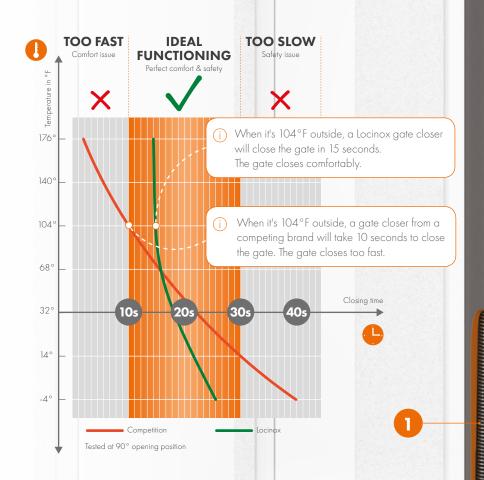



Some customers prefer their gate to close slowly, while others want it to go a little faster. No problem! All of our gate closers can easily be adjusted in a matter of seconds to the wishes of your customers.

The final snap allows the gate to speed up a little at the end: this way, you are reassured the gate is properly closed. The final snap can easily be adjusted to any need.









3 FUNCTIONS COMFORTABLY

The in-house developed High-Helix screws guarantee a consistent functionality and ensure a comfortable opening speed for the elderly or disabled.

DUST- & WATERPROOF


Our gate closers are equipped with rotary seals. These seals protect the gate closers from dirt and dust particles intruding the mechanism, assuring your customers of worry-free functioning for many years to come.

5 CLOSES EVERY TIME

The powerful torsion spring guarantees the necessary closing force. Therefore, your gate will always close: unaffected by strong winds, the width of your gate wing or the outside temperature. You can rest assured.

6 100% PROTECTED

The aluminum powder coated housing guarantees full protection against any weather conditions. The housing is windproof, frost-free and dust-& waterproof, allowing your gate closer to function perfectly.

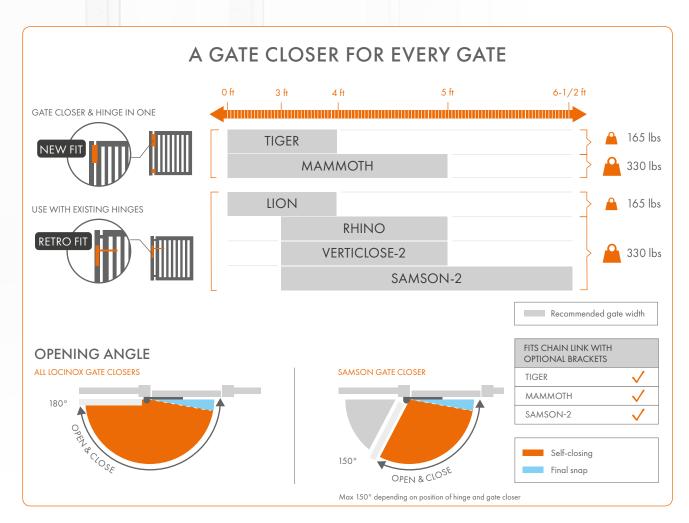

Find your gate closer thanks to our handy gate closer configurator on www.locinoxusa.com

Compact hinge and gate closer in one

TIGER (Patented)

180° self-closing hydraulic hinge with precise adjustments on speed and final snap. The aluminum powder coated housing and unique high-tech components allow the Tiger to function perfectly in any weather situation. We highly recommend the Tigerdrill for an even more efficient installation. The Puma hinge is included.























Color options






Specifications

- Automatic 180° closure with adjustable closing force
- ✓ Aesthetic design
- ✓ Powder coated aluminum housing
- Closing speed unaffected by humidity and temperature changes
- ✓ Vandal-proof
- ✓ For left and right turning gates
- ✓ 2-dimensionally adjustable, Gap & Ht x 3/4"
- ✓ Easy to open: Max opening force 3.5 lbs

Order code

TIGER Hydraulic gate closer and Puma 180° hinge for gates up to 150 lbs 24h



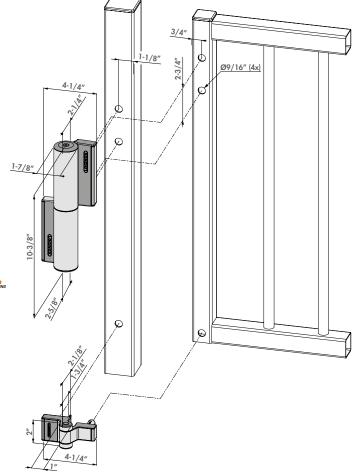



TIGERDRILL
P. 152



DRILLVISE-II P. 155



DRILLVISE-IV



CLB-TIGER





Stylish hydraulic gate closer for heavy gates

MAMMOTH-180 (Patented)

Elegant and powerful self-closing gate closer for 180° gate situations. The Mammoth is a real muscleman, perfectly fit for heavy gates up to 330 lbs. It is equipped with a double bearing for an extremely comfortable functionality. The Active Thermal System guarantees a constant closing speed, unaffected by weather conditions. The Dino hinge is included.















Color options








- Self-closing hinge with patented hydraulic damping
- ✓ Aesthetic design
- ✓ Powder coated aluminum housing
- Closing speed unaffected by temperature changes
- ✓ Easy to open: Max opening force 3.5 lbs
- ✓ Vandal-proof

Order code

MAMMOTH-180 Stylish hydraulic gate closer for heavy gates 24h SHIPPING



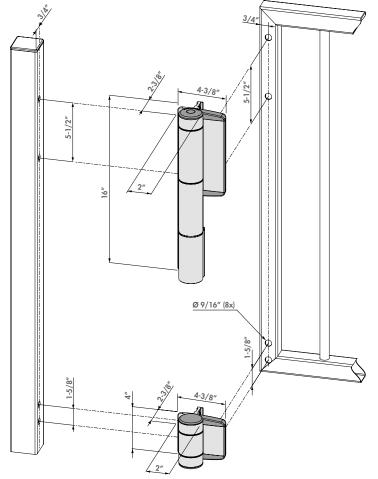



DRILLVISE-II P. 155



DRILLVISE-IV P. 155



CLB-MAMMOTH P. 172

















FEATURES

SETTING LOCINOX

GATE CLOSERS APART!















Hydraulic gate closer for large gates

SAMSON-2 (Patented)



Simple installation and flexible functionality make it the perfect fit for larger gates. Samson-2 is a polyvalent hydraulic gate closer developed with high quality components for an exceptional long life span. Temperature changes do not affect the smooth and constant functionality. The set of mounting brackets that are delivered with the closer make Samson-2 fit for any gate. Also fitted for chain link fences.














Color options



Specifications

- Opening angle up to 150° depending on the situation
- Specially developed for outdoor use: industrial quality
- ✓ Powder coated aluminum housing
- ✓ Fast and easy fixation with Quick-Fix
- ✓ For left and right turning gates



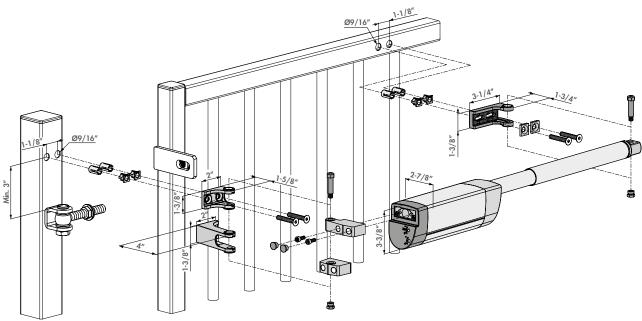








DRILLVISE-II P. 155

DRILLVISE-IV P. 155

SB-P. 171







Compact and polyvalent gate closer, fits every gate situation

LION (Patented)



The attractive and compact Lion gate closer is unique in its kind. This hydraulic allrounder is fit for every possible gate situation. Moreover, both 90° and 180° railsets are included in the package, allowing for more flexibility on site. The powder coated aluminum housing combines a handsome look with a spotless functioning for many years. Choose the Lion-VTC Drill for an even faster installation.













Color options









- ✓ Automatic 180° closing with adjustable closing speed and final snap
- ✓ Railset included for 90° and 180° situations
- ✓ Compact and aesthetic design
- ✓ Powder coated aluminum housing
- ♥ Closing speed unaffected by temperature changes
- ✓ For left and right handed gates
- ✓ Integrated pretension for extremely smooth installation







Recommended installation tools







LION-VTC-DRILL P. 154

DRILLVISE-II

DRILLVISE-IV P. 155



LION Compact hydraulic gate closer for any gate situation SHIPPING





Aesthetical 180° gate closer with direct connection to the hinge

RHINO (Patented)

Transform your 180° hinge into a self-closing solution thanks to our Rhino hydraulic gate closer. The direct connection to the Locinox hinge guarantees the discreet look and efficient transmission of the energy required to close the gate perfectly. The aluminum powder coated housing ensures a corrosion-free existence and smooth operation in any weather. The Rhinodrill jig guarantees an extremely efficient installation.





















Color options






Specifications

- ▼ 180° hydraulic gate closer with adjustable speed and final snap
- changes
- ✓ Powder coated aluminum housing
- ✓ Fits 180° hinges M16 & M20 (GBMU, GBMU4D & BOLTON4D)
- ✓ Use of bearing eyebolt (1034-ROLL-M16) recommended
- ✓ Integrated pretension for extremely smooth installation

Order code

RHINO Hydraulic gate closer for gates up to 300 lbs



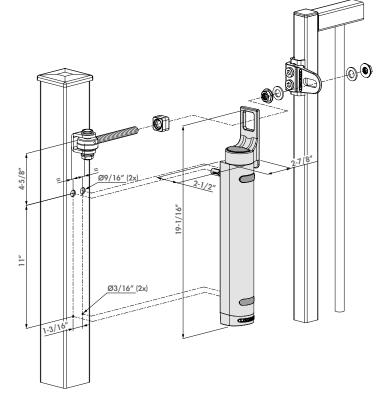



RHINODRILL



DRILLVISE-II P. 155



DRILLVISE-IV P. 155







Powerful all-round hydraulic gate closer for 90° and 180° hinges

VERTICLOSE-2- (Patented)



The Verticlose-2 gate closer is the top line in the Verticlose product range. Highly versatile and with excellent features, the powerful Verticlose-2 is the perfect gate closer for both 90° and 180° hinge situations. The integrated pretension, micro adjustment of speed and final snap and the Quick-Fix fixation guarantee a very quick and efficient installation. The aesthetic aluminum powder coated housing in combination with highly durable internal components guarantee a very long life cycle.



















Color options






Specifications

- Powder coated aluminum housing, perfectly suited for outdoor use
- ✓ Integrated pretension for extra smooth installation
- Ø Firmly fixed thanks to patented Quick-Fix system

90° Ø 9/16" Ø 9/16" Ø 9/16" Ø 1/4"



Order code

VERTICLOSE-2- Powerful and all-round hydraulic gate closer for 90° and 180° hinges 24h/mms





LION-VTC-DRILL



DRILLVISE-II P. 155



DRILLVISE-IVP. 155





Powerful and all-round hydraulic gate closer for wall mounting

VERTICLOSE-2-WALL- (Patented)



The Verticlose-2 Wall gate closer has been specifically designed for wall mounting where the gate closer itself is positioned at a 90° position in relation to the gate. The specially designed arm turns around the wall or post, ensuring a large opening angle. The aesthetic powder coated housing and high-end components make sure that the Verticlose-2 Wall is perfectly weatherproof.




















Color options



Specifications

- Self-closing gate closer with adjustable speed and final snap
- Specially designed arm for wall mounting while guaranteeing a big opening angle
- ✓ Aesthetic & compact design
- ✓ Powder coated aluminum housing
- ✓ Integrated pretension for extra smooth installation
- ${\it extstyle C}$ Closing force over the full 180° opening angle
- Ø Firmly fixed thanks to patented Quick-Fix system




Order code

VERTICLOSE-2-WALL-

Powerful and all-round hydraulic gate closer for wall mounting 24h







LION-VTC-DRILL P. 154




DRILLVISE-II P. 155



DRILLVISE-IV P. 155



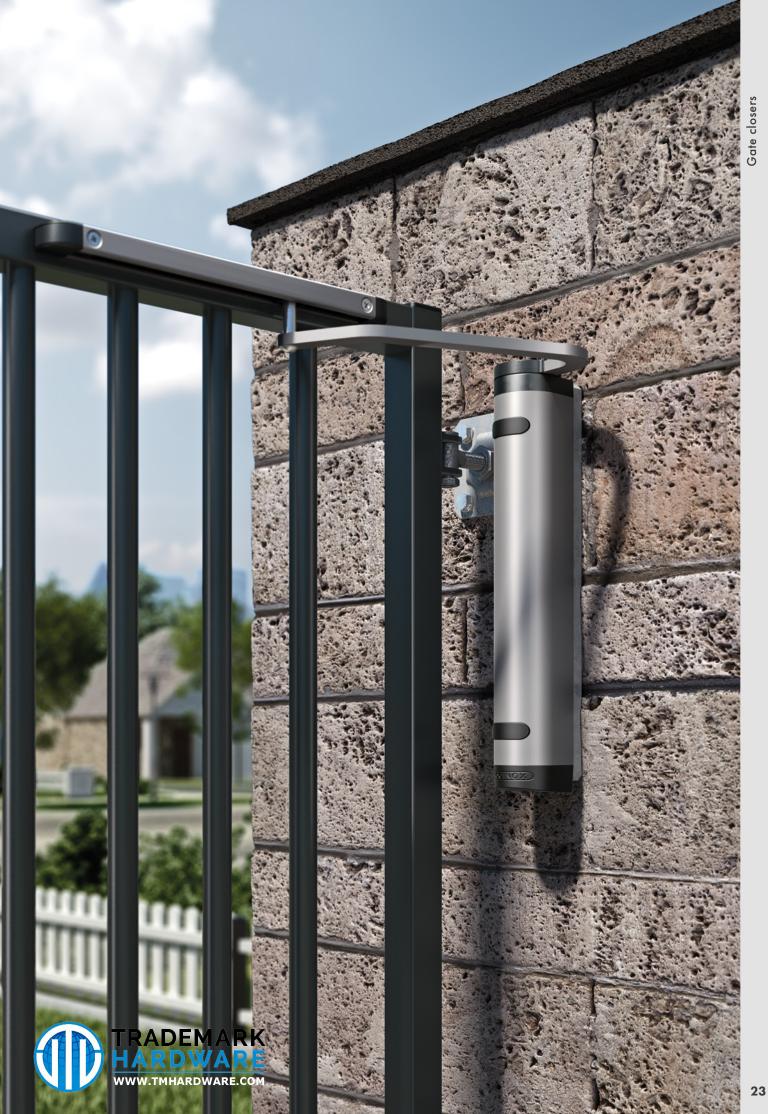



Automation & Electronics

Automation has become a fundamental factor in the fence & gate sector. Locinox offers a wide range of solutions to manufacture user-friendly smart gates and fences.



- 26 Keypads
- 28 Electric strikes



- 31 Electromagnetic locks
- 42 Electradrop



- 43 Electric accessories
- 44 Power supplies



Outdoor keypads

The SlimStone-2 keypad with two integrated relays sets the new standard! With an IP 68 value SlimStone is designed to smoothly endure the most extreme weather conditions. Moreover, the Smart Heating System guarantees a frost-free and perfectly working keypad during winter time.

SlimStone-2 can monitor all Locinox access control products, as for example the surface mounted Modulec electric strike or our range of magnetic locks. Locinox automation products also fit this range. A quick and efficient installation ensures comfort and peace of mind.



Timesaving



Weatherproof



Quick-Fix fixation







Sturdy, weather resistant keypad SLIMSTONE-

The SlimStone keypad with integrated led lighting, is unique in its kind. The keypad is developed and tested to guarantee uninterrupted use in the most extreme weather conditions. The integrated relay, with a normally used open and closed contact, makes the combination with Locinox products and other automation products very easy. Both

1

the installation and programming of the SlimStone are made very

Color options





Specifications

- ✓ IP68 rated Extremely resistant to water and dust
- Aluminum vandal-proof housing with scratch-resistant textured lacquer

SHIPPING

- ✓ Energy efficient adjustable white led lights
- ✓ Highly resistant stainless steel push buttons tested for 1,000,000 pushes

- ✓ Tested from -22°F to 185°F
- - 99s)
- ✓ Voltage: 10 up to 26 V AC/DC
- heating)

Order code

SLIMSTONE- Weatherproof keypad with integrated relay, Inputvoltage 10 to 26 V AC/DC

Compatible products



MODULEC-SA P. 29



MODULEC-SH P. 29



LIKQ U2



B-MAG-P. 31



(LOCINOX)



Sturdy, frost-free and weather resistant keypad with 2 integrated relays

SIIMSTONF-2-

The new SlimStone-2 keypad contains two relays for an improved access control and advanced flexibility. It offers the possibility to command 2 different automation devices or to open the gate in 2 different ways. This keypad with integrated LED lighting is unique thanks to its strength and extreme weather resistance (IP68). In all weather conditions, access control is guaranteed. Both integrated relays, with a Fail Open and Fail Close contact, allow an easy connection to Locinox and third-party automation products.

Color options

















Specifications

- ✓ Highly resistant stainless steel push buttons tested for 1,000,000 pushes and more
- ✓ Easy programming of up to 100 user codes
- ✓ Tested from -22°F to 185°F
- ✓ Adjustable time range between pulse and timer mode (100ms 99s)
- ✓ Voltage: 10 up to 26 V AC/DC
- 2 integrated switching relays: 2 x NO 2 x NC 2 x COM (Max. 2A, 60W, 26V AC/DC)
- 6-1/2ft connection cable included

Compatible products




MODULEC-SA



MODULEC-SH



LIKQ U2

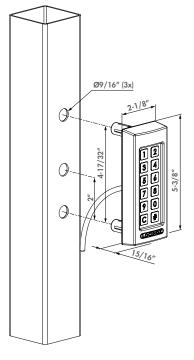



SLIMSTONE-2- Sturdy, frost-free and weather resistant keypad with 2 integrated relays

Electrical accessories



DVK-HD P. 45



DVK P. 44



2005 P. 45



PB-1 P. 44





AC-TRANS-12V-25W P. 45



DC-POWER-12V-20W







Electric strike for surface mounted locks


SE (Patented)

Electric strike for swing gates. Equipped with a double blocking system which will resist to up to 1000 lbs of pulling force. The deadbolt receiver has been reinforced with stainless steel, making it more robust and extremely strong. The ideal solution for your access control. SE is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).

Specifications

- ▼ Type SE.E: Emissa Fail Close
- ▼ Type SE.R: Ruptura Fail Open
- ▼ Deadbolt receiver reinforced and in stainless steel
- ✓ For profiles 2" and larger
- ✓ Voltage: 12V AC/DC

- ✓ Water resistant & weatherproof
- ♥ Pressure resistance on self-latching bolt: 1000 lbs



Compatible locks



Order codes

SE-E Electric strike, Emissa, Fail Close

SE-R Electric strike, Ruptura, Fail Open

Electric strike for mortise locks

SEH (Patented)


Electric strike for swing gates using our Hybrid Mortise locks. The strike is equipped with a double blocking system which supports 1000 lb pulling force. This keep is extremely strong and the ideal solution for your access control installations. The electric strike is available in a Fail Secure or Fail Safe model. Latch gap: 1". SEH is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).



Specifications

- ▼ Type SEH.E: Emissa Fail Close
- ▼ Type SEH.R: Ruptura Fail Open
- ✓ Easy left or right hand changing
- ✓ For profiles 2" and larger
- ✓ Voltage: 12V AC/DC

- ✓ Water resistant & weatherproof
- ✓ Pressure resistance on self-latching bolt: 1000 lbs



Compatible locks



H-METAL P. 83

H-METAL-WB

H-WOOD P. 89



Order codes

SEH-E Electric strike, Emissa, Fail Close for H-Metal and H-Wood

SEH-R Electric strike, Ruptura, Fail Open for H-Metal and H-Wood

Surface mounted electric strike

MODULEC-SA (Patent pending)

Electric Strike for surface mounted locks. Fast and easy installation thanks to the Quick-Fix. Easily interchanged with the SA keep. Can be connected to both 12V - 24V and AC/DC. Modulec-SA is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).

SHIPPING

Stop plate color options










Specifications

- ✓ Tested up to 500 000 movements
- ✓ Fast and easy fixation with Quick-Fix
- Same drilling pattern as SA, SH and SM keeps
- ✓ Easy left or right hand changing
- ♥ Corrosion-resistant: black anodized housing
- ✓ Adjustable for profiles: 1-1/2" to 2-1/2"
- ✓ Voltage: 12V-24V AC/DC
- ✓ Power: 15W



Compatible locks



Order code

MODULEC-SA-E Fail Close for surface mounted gate locks, 12-24V AC/DC

MODULEC-SA-R Fail Open for surface mounted gate locks, 12-24V AC/DC

Surface mounted electric strike with security mushroom

MODULEC-SH (Patent pending)

Replace your SHKL keep with an electrical surface mounted keep with Fail Close / Fail Open functionality. Easy to install thanks to the patented Quick-Fix. For 12V-24V and AC/DC. Modulec-SH is available in two versions: E (Emissa - Fail Close) and R (Rupture - Fail Open).

SHIPPING Stop plate color options









Specifications

- ✓ Tested up to 500 000 movements
- ✓ Fast and easy installation with Quick-Fix
- Same drilling pattern as SA, SH and SM keeps
- ✓ Easy left or right hand changing
- ♥ Corrosion-resistant: black anodized housing
- ✓ Adjustable for profiles: 1-1/2" to 2-1/2"
- ✓ Voltage: 12V-24V AC/DC
- ✓ Power: 15W

Ø9/16" (3x)

Compatible locks



Order code

MODULEC-SH-E Fail Close for surface mounted gate locks, 12-24V AC/DC

MODULEC-SH-R Fail Open for surface mounted gate locks, 12-24V AC/DC



BUILT-IN MAGNETIC LOCKS

A FULL CONCEPT FOR SWING GATES

MAGUNIT

High quality insert magnetic lock with guaranteed holding force and long durability. 500h salt spray resistant.

N-LINE-B-MAG

Aesthetic, adjustable and powder coated finishing profile for swing gates preventing people to stumble against protruding parts.

3006PULL

Elegant powder coated handle for easy opening and closing of the gate.



- Save time and order the all-in-one
- N-LINE-B-MAG KIT
- Make your gate self-closing with the powerful VERTICLOSE-2 gate closer



B FULL CONCEPT FOR SLIDING GATES



High quality insert magnetic lock with guaranteed holding force and long durability. 500h salt spray resistant.

N-LINE-S-MAG

Aesthetic, adjustable and powder coated finishing profile for sliding gates preventing people to stumble against protruding parts.

3006PULL

Elegant powder coated handle for easy opening and closing of the gate.



 Add access control to your gate with the strong, frost-free and watertight SLIMSTONE keypad (IP68)



















Integrated magnet lock for swing gates

B-MAG-

Thanks to its assembly in the pole, this magnet lock can be installed invisibly and aesthetically, whilst maximal passage space is maintained. A quick assembly is done with Quick-Fix. It has a guaranteed tensile strength of 550 lbs and resists to extreme weather conditions. The rubber bumpes prevent shaking of the gate, and damage to the gate and its accessories in case of harsh handling, and the flexible assembly of the armature plate guarantees a good closing even if the gate isn't perfectly aligned.
















Color options






Specifications

- Maglock
- (ISO 9227)
- Special two-layer protective coating developed for outdoor use
- ✓ Anti-residual magnetism kick-off system
- Minimal pulling force: 2500N (600 lbs)





Order codes

B-MAG- Integrated magnet and bolt-on anchorplate for swing gates



Recommended products



SLIMSTONE-P. 26



PB-1

P. 44



DVK-HD P. 45



DC-ACCESS-12V-20W P. 46



DC-POWER-12V-20W



DC-POWER-24V-25W P. 46





Set with magnet and anchorplate for N-LINE (B or S)-MAG profiles

MAGUNIT-2500

Set with a MAG-2500 and anchorplate along with fittings for use with a N-LINE-B-MAG or N-LINE-S-MAG, 1 or more MAGUNITs can be mounted in the N-LINE profile.















Specifications


- Guaranteed holding force tested on every Maglock
- Special two-layer protective coating developed for outdoor use

- ✓ Voltage: 12V / 24V DC
- ✓ Minimal pulling force: 2500N (600 lbs)

Order codes

MAGUNIT-2500 Magnet and anchorplate for N-LINE-B-MAG and N-LINE-S-MAG profiles



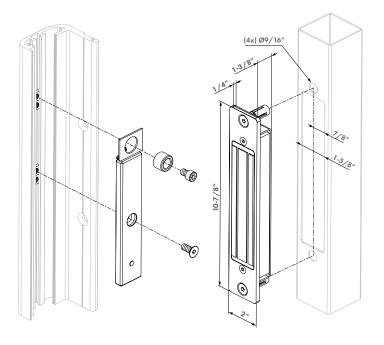

Required products









Color options





Specifications

- ✓ Profile lengh: 78-3/4"
- ✓ Fast and easy fixation with Quick-Fix
- ✓ Powder coated aluminum housing
- Specially designed for exterior use

Aluminum finishing profile for swing gates to combine with **MAGUNIT**

N-IINF-B-MAG-

Adjustable, powder coated aluminum design profile for aesthetic closing of swing gates along with 1 or more MAGUNIT-2500. Thanks to the integrated magnet and the armature plate, which are both integrated in the design profile, a safe and complete solution without any protruding components is guaranteed.
















2.7|16"

Order codes

N-LINE-B-MAG- Aluminum finishing profile for MAGUNIT-2500



Color options





Specifications

- ✓ Profile lengh: 78-3/4"
- ✓ Fast and easy fixation with Quick-Fix
- ✓ Powder coated aluminum housing

Aluminum finishing profile for sliding gates to combine with **MAGUNIT**

N-LINE-S-MAG-

Adjustable, powder coated aluminum design profile for aesthetic closing of sliding gates along with 1 or more MAGUNIT-2500. Thanks to the integrated magnet and the armature plate, which are both integrated in the design profile, a safe and complete solution without any protruding components is guaranteed.







Compatible magnet



MAGUNIT-2500 P. 32



N-LINE-S-MAG- Aluminum finishing profile for MAGUNIT-2500







Specifications

- ✓ Includes 2 integrated magnets equipped with Quick-Fix mounting (MAGUNIT-2500)
- Including aluminum filling profile with Quick-Fix mounting (N-LINE-B-MAG profile)
- ✓ Profile lengh: 78-3/4"
- Including 2 aluminum covers for an aesthetical finishing on top and bottom
- $\ensuremath{\checkmark}$ Specially designed for exterior use
- ✓ Voltage: 12V / 24V DC

Order codes

N-LINE-B-MAG-KIT- Set with N-LINE-B-MAG profile and 2x MAGUNIT-2500



Set with N-LINE-B-MAG & 2x MAGUNIT

N-LINE-B-MAG-KIT-

Electromagnetic set for swing gates for fixing to the gate frame. The set consists of two MAGUNIT and an aesthetic design profile. Available in ZILV and RAL9005.

















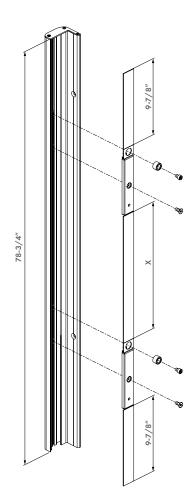

Kit includes



N-LINE-B-MAG-P. 33



MAGUNIT-2500 P. 32





Automation & Electronics

Integrated magnet lock for sliding gates

S-MAG-

S-MAG is the perfect product to lock any type of sliding gate. It has a guaranteed tensile strength of 600 lbs and resists extreme weather conditions. The rubber bumpers prevent shaking of the gate, and damage to the gate and its accessories in case of harsh handling, and the flexible assembly of the armature plate guarantees a normal closing even if the gate isn't perfectly aligned.



SHIPPING














Color options





Specifications

- Guaranteed holding force tested on every Maglock
- Special two-layer protective coating developed for outdoor use
- ✓ Anti-residual magnetism kick-off system
- ✓ Minimal pulling force: 2500N (600 lbs)

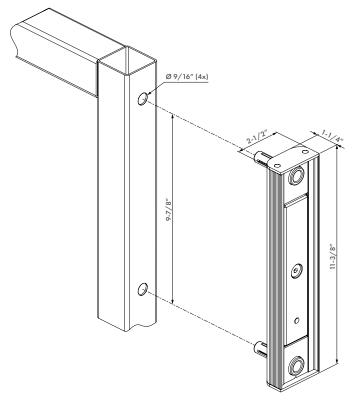

Order codes

S-MAG- Integrated magnet and bolt-on anchorplate for sliding gates, 550lbs pulling force 245 history.





Recommended products

SLIMSTONE-P. 26

PR. 1

PB-1 P. 44



DVK-HD P. 45



DC-ACCESS-12V-20W P. 46



DC-POWER-12V-20W



DC-POWER-24V-25W P. 46





SURFACE MOUNTED MAGNETIC LOCKS



MAGMAG

High quality surface mounted magnetic lock with guaranteed holding force and long durability. 500h salt spray resistant

N-LINE-MAG

Aesthetic, adjustable and powder coated finishing profile for swing gates preventing people to stumble against protruding parts

3006PULL

Elegant powder coated handle for easy opening and closing of the gate



- Save time and order the all-in-one N-LINE-MAG KIT
- Add access control to your gate with the strong, frost-free and watertight SLIMSTONE keypad (IP68)
- Make your gate self-closing with the aesthetic
 MAMMOTH gate closer



Electromagnetic lock with handles

















Surface mounted electromagnetic lock with integrated pull/push handles

MAG

Innovative electromagnetic lock for access control. Available in 2 versions. MAG2500 with 600 lbs and MAG5000 with 1200 lbs pulling force. The aluminum powder coated housing with integrated design handles gives your access control gate that extra touch. Stop losing precious time with welding boxes; drilling 7 holes does the job. The Quick-Fix enables a fast and strong fixing. A two layer, protective coating guarantees that our electromagnetic locks are ready for years of worry free use outside.















Color options








Specifications


- Maglock
- ✓ Special two-layer protective coating developed for outdoor use
- ✓ Powder coated aluminum housing
- ✓ Raised edge on the magnet housing makes it impossible to put a crowbar between the magnet and the armature plate
- ✓ Fast and easy fixing by means of 5 holes with Quick-Fix
- ✓ Voltage: 12V / 24V DC


Order codes

For square posts and gate profiles of 1-9/16" till 3-1/8", 600 MAG-2500 lbs pulling force 24h For square posts and gate profiles of 1-9/16" till 3-1/8", MAG-5000 1200 lbs pulling force 24h SHIPPIN







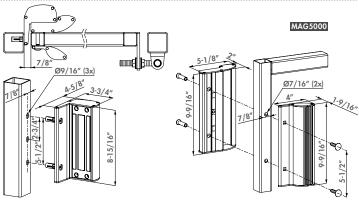

Recommended products



N-LINE-MAG-2500 P. 40



P. 44



DC-ACCESS-12V-20W P. 46



DVK-HD P. 45



DC-POWER-24V-25W







Surface mounted electromagnetic lock without integrated handles

MAGMAG

Magnetic lock without handle. Available in 2 versions. MAGMAG2500 with 600 lbs and MAGMAG5000 with 1200 lbs of pulling force. The aluminum powder coated housing equipped with the unique Quick-Fix ensures a fast and nicely finished mounting. Eliminate time-consuming welding; drilling 5 holes is enough to fix the lock. A two-layer, protective coating guarantees that our electromagnetic locks are ready for years of worry free use outside.



SHIPPING











Color options







Specifications

- (ISO 9227)
- Maglock
- Special two-layer protective coating developed for outdoor use
- ✓ Powder coated aluminum housing
- ✓ Raised edge on the magnet housing makes it impossible to put a crowbar between the magnet and the armature plate
- ✓ Fast and easy fixing by means of 5 holes with Quick-Fix
- ✓ Voltage: 12V / 24V DC


Order codes


MAGMAG-2500

For square posts and gate profiles of 1-9/16" till 3-1/8", 600 lbs pulling force 24h SHIPPING

For square posts and gate profiles of 1-9/16" till MAGMAG-5000 3-1/8", 1200 lbs pulling force 24h SHIPPING



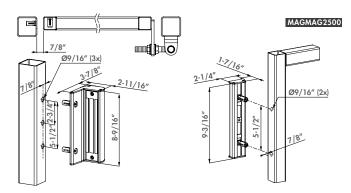

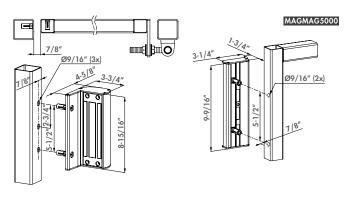

Recommended products



N-LINE-MAG-2500



P. 44



DC-ACCESS-12V-20W



DVK-HD P. 45



DC-POWER-24V-25W P. 46







Profile for MAG2500 and MAGMAG2500 magnetic locks

N-LINE MAG

Adjustable, powder coated aluminum design profile for aesthetic closing of the gaps between 2 MAG2500 or MAGMAG2500 magnetic locks. To be fixed to the post. Prevents passers by to bump into the protruding parts of the magnetic lock.

Color options








- ♥ Profile lengh: 78-3/4"
- ▼ Delivered with self drilling screws, compatible with
- ✓ 2 plastic cover caps and 6 in-between caps included
- ✓ Separate adaptor needed with use of 3006PULL handle, delivered with 3006PULL







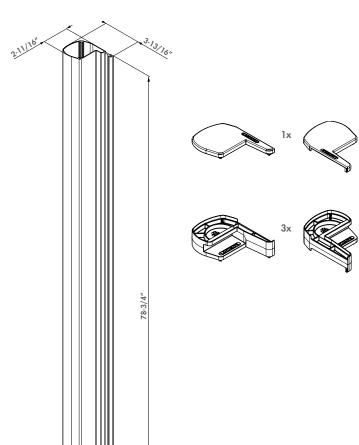

Order code

N-LINE-MAG-2500 Aluminium finishing profile for MAG-2500 & MAGMAG2500 34h MAGMAG2500 SIMPPING



Recommended magnetic locks









Set with N-LINE MAG profile, 2 x MAGMAG2500

N-LINE MAG KIT-2500

Set with N-LINE MAG profile and 2x MAGMAG2500 and 3006PULL handle. 3006PULL handle is included to finish your gate. Aesthetic solution which prevents passersby to stumble against the parts of the magnetic lock.












Color options








Specifications

- above, below and in between the magnets
- ✓ Profile lengh: 78-3/4"
- Delivered with self drilling screws, compatible with
- ✓ 2 plastic cover caps and 6 in-between caps included
- ✓ Aluminum 3006PULL handle included
- ✓ Delivered with 2x MAGMAG2500
- ✓ Voltage: 12V / 24V DC









Order code

N-LINE MAG KIT-2500

Set with N-LINE MAG profile and 2x MAGMAG2500 and 3006PULL handle



Kit includes



N-LINE-MAG-2500 P. 40



MAGMAG-2500 P. 39



3006PULL P. 161





Electrical drop bolt

ELECTRADROP (Patented)

Electrical 24V drop bolt with 4-1/2" throw for safe locking of automated swing gates. By securing your gate with a drop bolt you disburden the electric gate motors.

24h SHIPPIN















Color options






Specifications

- ✓ Vandal proof, powder coated aluminum housing
- To be connected to the warning light on automated gates (min 3 sec prewarning signal) or directly on the gate automation
- Mechanical release possible (by key) in case of emergency
- Obstacle detection with automatic stop of the drop bolt in case of a pressure exceeding 40 lbs
- ✓ Consumption: 25 W / Standby: 0,2 W
- √ 16-1/2 ft cable included
- ✓ Included: 3012-37-STD-VSZ cylinder
- ▼ To connect to a Locinox DC-POWER-24V-25W power supply

Order code

ELECTRADROP For profiles 1-1/2" x 1-1/2" or more



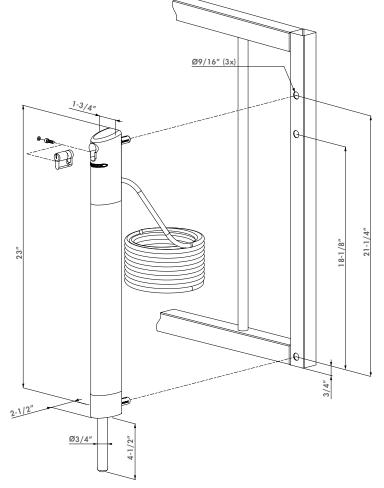

Compatible ground stop & power supply





DC-POWER-24V-25W







Design led-lighting for gates

TRICONE

Plug & Play design led lighting for your fences & gates. Gives your gate an aesthetical look with minimal power consumption! The Quick-Fix provides a fast and strong fixing on your fencing.












Color options





Specifications

- ✓ Aluminum housing with plastic (POM) cable guiding
- ± 140° beam angle
- ✓ Life expectancy: 50,000 hours
- ✓ Power: ± 1W (with 12V DC)
- ✓ 12V AC or DC (max. 18V DC or peak AC)
- Minimum power consumption and long lasting performance
- ✓ Resin encapsulated print circuit board for weather resistance
- Power up to 20 Tricone with 1 Locinox AC transformer or up to 15 with the DC power
- ✓ IP54



Order code

TRICONE Design led-lighting for gates with Quick-Fix



Cable guiding



DVK-HD P. 45



DVK P. 44



2005 P. 45



PB-1 P. 44

Recommended power supplies



AC-TRANS-12V-25W



DC-POWER-12V-20W P. 46



DC-ACCESS-12V-20W P. 46





Powerbox - Transformer housing

Aluminum powder coated transformer box with Quick-Fix for strong and easy installation.



Housing color options





Specifications

- ✓ Waterproof tranformer box IP66
- ✓ Powder coated aluminum housing
- ✓ DIN-rail mount: 3-3/8" (5 units)
- ✓ Designed with heat-dissipation fins at the back



Housing for power supplies and timer







DC-ACCESS-12V-20W P. 46



DC-POWER-12V-20W



DC-POWER-24V-25W P. 46

Order code

PB-1 Transformer housing with DIN-rail and Quick-Fix fixing

Cable guide w/flex ss conduit

Stainless steel guiding cable to protect your electrical wires in an outside environment.




SHIPPING

Color options



Specifications

- ✓ Length of the cable: 17-5/8"
- ✓ Supplied with 8 self tapping screws
- ✓ Inner diameter: Ø13/32"



Recommended cable



Order code

DVK Reinforced stainless steel flex cable, 17-3/4" Long

2005

P. 45







Reinforced, braided stainless steel guiding cable

DVK-HD

Aesthetic and durable solution for the guidance of electrical wiring. Protects your wiring against dirt, moist and vandalism in an outside environment. The cable wraps around and protects the cabling of your electrical gate hardware and avoids the risk of short circuiting.


24h SHIPPING

Color options



Specifications

- ✓ Vandal-proof, stainless steel, braided guiding cable
- ✓ Available with 17-3/4" or 25-9/16" braided cable
- ${\color{red} {f arphi}}$ Protects electrical wiring against vandalism, moist, dirt and vermin
- ✓ Cable entry: aluminum housing
- ✓ Inner diameter: Ø3/8"



Recommended cable



Order codes

DVK-HD-450 Reinforced stainless steel flex cable, 17-3/4" Long

DVK-HD-650 Reinforced stainless steel flex cable, 25-9/16" Long

2005 P. 45



Electrical wire

2005

Electrical cable; very flexible and weatherproof. Resists breaking and shorting out. Lasts longer than standard home wiring.

Specifications

- ✓ Length of the wire: 16-1/2ft
- ✓ Water resistant & weatherproof
- ▼ Tested at 500.000 bendings

Order code

2005 Electrical cable 196" - 2 x 0,75 mm²



Safety transformer 12V AC

AC-TRANS-12V-25W

Safety Transformer 12V - 25W

Specifications

- ✓ Mounting on DIN-rail or directly
- ✓ Power: 25W
- Ø Primary voltage: 230V AC Secondary voltage 12V AC
- ✓ Aluminum housing

Order code

AC-TRANS-12V-25W Transformer 12V AC - 25W





All-in one 12V DC Access Module with integrated timer

DC-ACCESS-12V-20W

All-in-one, Plug&Play Access Module (230V AC). Including power supply and integrated timer with easy to read display and easy to operate: time range (1 to 99s) of switched state controlled by push buttons. A 12V DC Fail Open or Fail Close device can be easily connected to the module.

Specifications

- ✓ Mounting on DIN-rail or directly
- ▼ Time range (1 to 99s) of switched state controlled by push buttons
- ✓ Set time clearly visible on display
- ✓ Input voltage: 110V AC / Maximum output power: 25W

Order code

DC-ACCESS-12V-20W All-in one 12V DC Access Module with integrated timer



Safety power supply 12V and 13V DC

DC-POWER-12V-20W

Safety power supply 12V DC - 20W

Specifications

- ✓ Mounting on DIN-rail or directly
- ✓ Power: 20W
- ✓ Primary voltage: 230V
- ✓ Secundary voltage: 12V and 13V DC
- ✓ Aluminum housing

Order code

DC-POWER-12V-20W Power supply 12 V DC - 20 W



Safety power supply 24V and 25V DC

DC-POWER-24V-25W

Safety power supply 24V DC - 25W



Specifications

- ✓ Power: 25W
- ✓ Primary voltage: 230V
- ✓ Secundary voltage: 24V and 25V DC
- ✓ Aluminum housing

Order code

DC-POWER-24V-25W Power supply 24-25V DC - 25W








Position detection set for gates - Stand alone

GATESWITCH

Multi-purpose position detection set, consisting of a magnet and magnetic switch. This set can be easily connected to any electrical system like your access control or burglary system. The distance between the magnets can be easily changed by means of an adjustable magnet and included filler plates.


Specifications

- Possibility to activate led light when the sensor detects the magnet (requires 12V DC at the gate)
- Operates with Normally Open (N/O) or Normally Closed (N/C) contacts
- Required distance between the gate and the post is minimum 3/8" and maximum 2"
- Easy adjustment of distance between sensor and magnet by means of filling plates (fillers) and screwable magnet

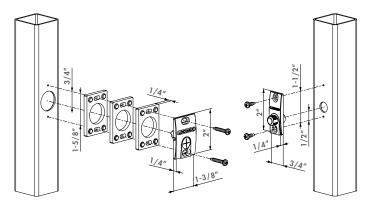

Recommended power supplies








DC-ACCESS-12V-20W P. 46

Order code

GATESWITCH For a min. gap of 3/8" and max. 2" between post and gate





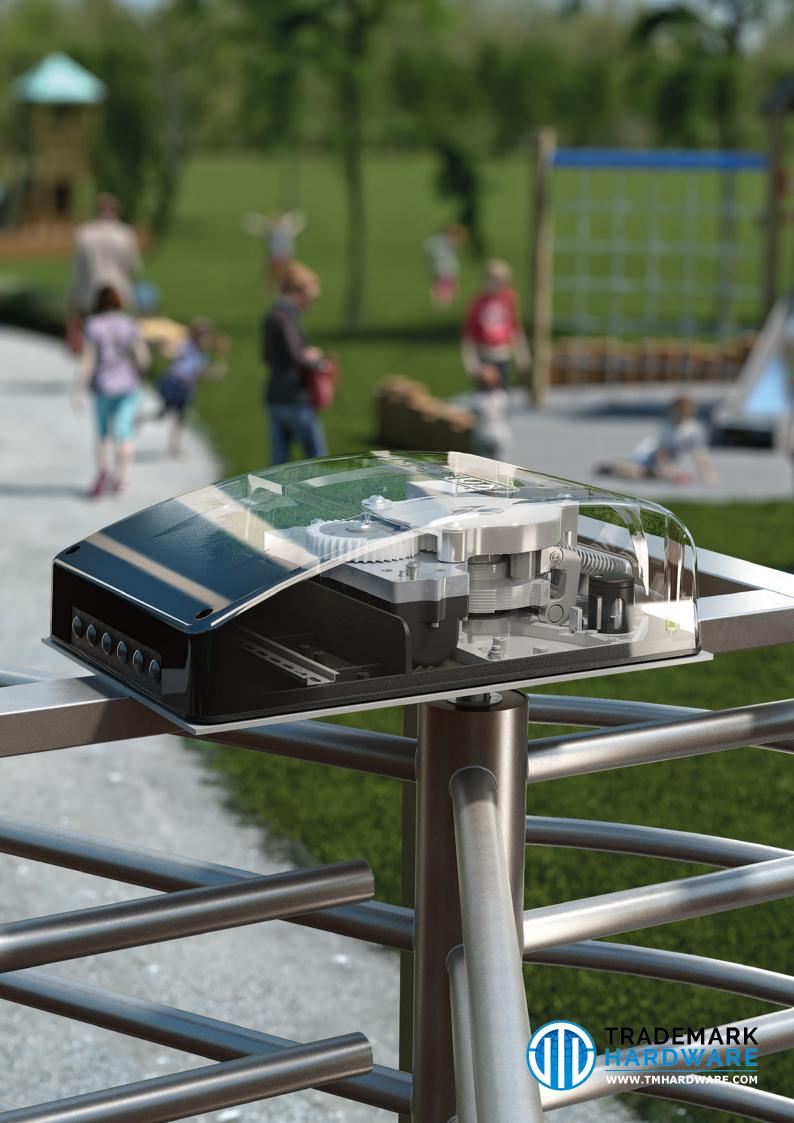

Turnstiles

The Locinox (electro)mechanical control unit allows you to easily create a maintenance free and high quality turnstile. You have an (electro)mechanical unit at your disposal with which you can match the design of your turnstile to the design of your fencing!



52 Turnitec

53 Access control modules







(ELECTRO) MECHANIC CONTROL UNIT FOR TURNSTILES

THE COMPLETE TURNITEC SOLUTION

1	TT-BM3S The essential module for any turnstile	p. 53	
2	TT-DM3 Recommended hydraulic damping mechanism for extra user comfort	p. 53	
3	TT-FO31/TT-FC31 Fail Open or Fail Close electromechanical module for access control	p. 54	
4	DC-POWER-24V-25W Robust power supply with aluminum housing	p. 46	
5	TT-CL2 Counter and passing light signal module for visitor flow management	p. 55	
6	TT-BSP/TT-SSP Welding plate for fast and perfect installation of Turnitec on any turnstile	р. 53	3
7	TT-SAH Recommended for perfect connection of the basic module with the spline axle	р. 55	2
	Lower bearing for a smooth operation		
	TRADEMARK HARDWARE WWW.TMHARDWARE.COM		7

USER ADVANTAGES

SAVE MONEY

No security guards or ticket takers required

MONITOR AND CONTROL ALL TRAFFIC

You own the place

NO UNAUTHORIZED PEOPLE ON SITE

Keep everyone safe

REDUCE CRIME, BURGLARY AND THEFT

Ensures everyone's comfort and peace of mind

HIGHLY RELIABLE

Tested on 1 million movements

REASONS TO LOVE THE TURNITEC

ADVANTAGES FOR YOU

100% FLEXBILITY AND MODULARITY

Fits any need, build your own Turnitec

ONE PERSON AT A TIME

Prevent tailgating

(individuals entering right behind someone else)

EXTREME WEATHERPROOF

A perfect functioning, anywhere in the world

LOW ECOLOGICAL FOOTPRINT

Thanks to the energy-efficient power consumption

CONTROL ONE OR BOTH FLOW DIRECTIONS

POPULAR APPLICATIONS



PARKING SITES **AIRPORTS**



PUBLIC AREAS



INDUSTRY





COMMERCIAL



POWER PLANTS





PARKING SITES



BIKE PARKS



PARKS





EDUCATIONAL **FACILITIES**



MILITARY



PLAYGROUNDS



FESTIVALS



SPORTS STADIUMS





Modular (electro)mechanical control unit for turnstiles

TURNITEC (Patented)

The Locinox (electro)mechanical control unit allows you to easily create a maintenance free and high quality turnstile. You can match the design of your turnstile to the design of your fencing! The Turnitec mechanism is applicable to any turnstile and a quick installation is guaranteed. Thanks to the 100% modular design you can adapt the mechanism to your customers' desires. A comfortable and safe operation is guaranteed by the optional damping system that is unaffected by temperature changes.

24h SHIPPING

Compatible Turnitec modules







TT-BM3S P. 53

TT-BSP / TT-SSP P. 53

TT-DM3 P. 53







TT-FO31 P. 54

TT-FC31 P. 54

TT-MM3S P. 54







TT-SAH P. 55

TT-PIVOT P. 55

TT-CL1 P. 55

Specifications


- 100% modular system: composition according customers' desires and expandable at any moment
- Optional interchangeable left/right mechanical or electromechanical modules (Fail Open or Fail Close)
- Automatic return to starting position (by means of industrial pressure springs) after every passage
- √ Very robust implementation and strong connection with the turnstile by a 1-3/8" diameter spline axle (length 12-3/4")
- Manufactured completely in stainless parts (stainless steel and aluminum)
- Optional welding plate in black or stainless steel enables an easy mounting on every turnstile
- Optional damping system guarantees smooth and gradual movements. Damping is continuous and unaffected by temperature changes (patented system)
- ✓ Possible to set signal duration
- ▼ IP55 housing protects the mechanism against water, dirt, wind, dust and vermin

Order code

TTEC-BM3S-FO31-FC31-DM3-CL1

Full option Turnitec, Base mechanism + 1 Fail Open module + 1 Fail Close module + Hydraulic damper + 1 Counter & Light module



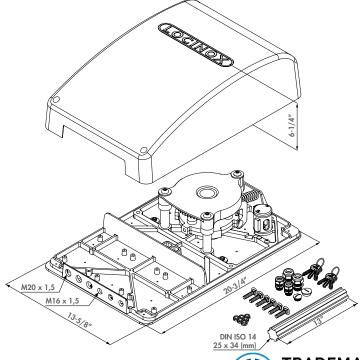

24h SHIPPING

TURNITEC base mechanism 3-arm

TT-BM3S

With the TURNITEC base mechanism you can bi-directionally operate your turnstile free-turning. This mechanism can be modular expanded with the mechanical and electromechanical locking modules and a hydraulic damper to further finetune the access control and usability of your turnstile.

Specifications

- ✓ Designed with rustproof materials
- ✓ With easy to mount optional welding plate and spline axle
- Ø Dimensions: 21-21/32" x 13-3/4" x 6-11/16"
- ✓ IP55 housing protects the mechanism against water, dirt, wind, dust and vermin
- Modular system to further expand
- ✓ High quality and guaranteed performance (tested on 1 million movements)

Order code

TT-BM35 Base mechanism 20-7/8" x 13-3/4" x 6-11/16"



TURNITEC welding plate in black steel

TT-BSP / TT-SSP

Welding plate for TURNITEC mechanism for a flawless installation of the TURNITEC on any turnstile. The pre-lasered drilling pattern and cutouts for the cylinders ensure a fast and error-free installation.

Specifications

- ✓ Welding plate in black steel or stainless steel
- ✓ Plate thickness: 3/16"
- $\ensuremath{\checkmark}$ Punched drilling pattern of base mechanism and cylinders for an error-free installation

Order codes

TT-SSP- Stainless Steel welding plate 20-7/8" x 13-3/4" x 3/16"

TT-BSP- Black Steel welding plate 20-7/8" x 13-3/4" x 3/16"



Hydraulic damper for TURNITEC

TT-DM3 (Patented)

Unique hydraulic damper for your TURNITEC mechanism. The patented system is unaffected by temperature changes. The first half of the rotation is undamped and the second half is damped progressively thanks to the continuous damping of the mechanism. This results in a fluent motion of the turnstile and avoids the turnstile hitting the users heels.

Specifications

- ✓ Patented hydraulic damping system
- Ø Damping of the rotational movement is continuous and progressive and starts from 60° in the 3-arm version.
- Smooth and gradual movements through continuous damping by the damper
- $\ensuremath{\mathbf{arphi}}$ High quality and guaranteed performance (tested on 1 million movements)
- ▼ The system is unaffected by temperature changes

Order code

TT-DM3 Hydraulic damping module for TT-BM3





Fail Open electromodule 3-arm for TURNITEC

TT-FO31



With the electromechanical module an operator has the ability to control incoming and outgoing traffic. Granting access or closing the system, changing the rotational direction and executing access control all can be managed easily with the TURNITEC module.

Specifications

- ✓ Time range (1 to 99s) of switched state controlled by push buttons
- ✓ 100% secure: reset function to rest after 1 full rotation of the turnstile
- ✓ Input voltage: 110V AC / Maximum output power: 25W
- ✓ Easy to expand with a TT-COUNTER-LIGHT module to control a counter and/or signalisation
- ✓ High quality and guaranteed performance (tested on 1 million movements)

Order code

TT-FO31 Fail-Open access control electromodule for TT-BM3



Fail Close electromodule 3-arm for TURNITEC

TT-FC31

With the electromechanical module an operator has the ability to control incoming and outgoing traffic. Granting access or closing the system, changing the rotational direction and executing access control, all can be managed easily with the TURNITEC module. After authorisation the turnstile is unlocked electronically and visitors have access to the terrain.

Specifications

- ▼ Time range (1 to 99s) of switched state controlled by push buttons
- ▼ 100% secure: reset function to rest after 1 full rotation of the turnstile
- Fitted with a 24V DC power supply made for exterior use and with integrated timer
- ✓ Input voltage: 110V AC / Maximum output power: 25W
- ✓ Easy to expand with a TT-COUNTER-LIGHT module to control a counter and/or signalisation
- ✓ High quality and guaranteed performance (tested on 1 million movements)

Order code

TT-FC31 Fail-Close access control electromodule for TT-BM3



Mechanical module for TURNITEC

TT-MM3S

This module for the TURNITEC mechanism offers the advantage of working completely mechanical. No power supply or cabling is needed. The release and locking of a direction of rotation is easy to set with a Europrofile cylinder lock. People can enter the terrain by pushing the turnstile arm.

Specifications

- ✓ Can be used for left or right rotation
- ✓ No electricity or power supply needed
- ✓ Mechanical module easy to install on site or to be replaced by an electromechanical module

Order code

TT-MM35 Mechanical access control module for TT-BM3





Turnitec counter & passing light signals module

TT-CL1



Plug&Play module which enables connecting counters and passing light signals in both turning directions. A counter tells you how many people are on the terrain or how many rotations your turnstile made while passing light signals guarantee a swift, safe and correct use of the turnstile.

Specifications

- ✓ Easy to connect with the TT-FO31 and TT-FC31 module
- ✓ Controlled by means of included reed contacts
- For both clockwise (CW) and counterclockwise (CCW) direction a voltage free changeover contact (NO&NC) is provided for passing light signal control (max 250V AC (30V DC)/1A)
- For both rotational directions a voltage free NO contact (0,5s closed at a correspondent move) is provided for connection of an external counter (max 250V AC (30V DC)/1A on the NO contact)
- Aluminum powder coated housing with heat dissipation fins

Order code

TT-CL1 Turnitec counter & passing lights module



Hub for seamless connection with turnstile

TT-SAH

Hub for seamless connection of the Turnitec base mechanism with the spline axle and the turnstile.

24h SHIPPING

Specifications

- ✓ 1 on 1 transmission of rotational movement
- ∀ Hub in stainless steel
- ▼ Tolerances according ISO2768-M
- ✓ Diameter and height: 2-23/64"
- ✓ Diameter center hole: 1-7/64"
- ✓ Height of teeth: 0-1/8 in

Order code

TT-SAH Hub for seamless connection with turnstile



Lower bearing and flange assembly for turnstiles

TT-PIVOT

Stainless steel bearing in a 11/16" thick aluminum baseplate. With bearings for a guaranteed smooth operation. Available with ball bearing or tapered roller bearing.

Specifications

- Aluminum baseplate to be adjusted to the turnstile diameter
- ♥ TT-PIVOT-BB: double sealed, stainless steel ball bearing (440 lbs axial load)
- ▼ TT-PIVOT-CC: tapered roller bearing, protected by baseplate (1650 lbs axial load)
- Stainless steel Ø1" axis with centered M12 threaded hole

Order codes

TT-PIVOT-BB Lower ball bearing and flange assembly for full height turnstiles

TT-PIVOT-CC Lower tapered roller bearing and flange assembly for full height turnstiles





Locks

Locinox locks guarantee a well operating gate. Every lock is thoroughly tested excessively in our own test center where they are exposed to the most extreme circumstances. This ensures us that our locks will work in all weather conditions. We offer a variety of locks for garden gates, industrial gates or swimming pool gates. Locinox locks - the safest solution in fence protection.



- 59 Locks for swing gates
- 73 Locks for child safety gates



- 76 Locks for sliding gates
- 101 Insert locks









One drilling template for all our locks and keeps.


With this interchangeability, the Locinox lock gives you the opportunity to offer a solution for every situation.







1 prepared post = so many possibilities

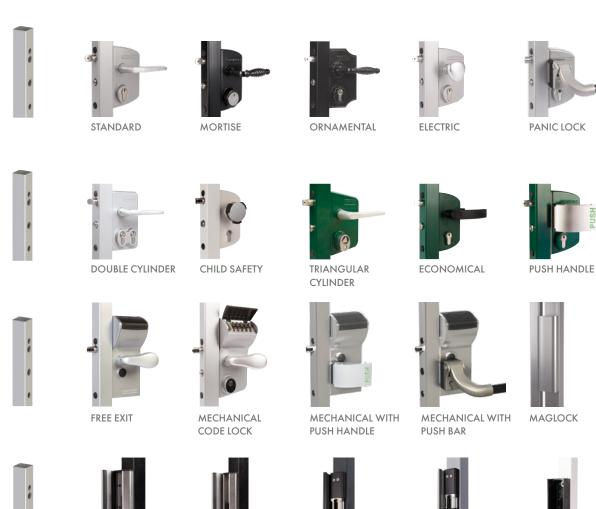

1 easy installation method for all our locks

INDUSTRIAL





SECURITY



MODULEC-SH

MODULEC-SA



GARDEN



Surface mounted gate lock

LAKQ U2 (Patented)

High quality gate lock with aluminum housing and stainless steel mechanism. We recommend this lock as the standard for your industrial gates. The latch and dead bolt have 3/4" continuous adjustment to allow perfect latching / locking of the mechanism. A stainless steel throw of 7/8" guarantees secure locking. Handle depends on color: silver locks ship standard with the modern aluminum anodized handle pair and all other colors ship with the black ornamental handle pair. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap. For a fast and highly precise installation, we recommend using the Drill-Fix drilling jig.











Lock box color options












Specifications

- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- ✓ Easy left or right changing of the self-latching daybolt
- ▼ Throw of the dead bolt, 7/8" in 1 turn of the key
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ Center distance bolts: 2-3/8"
- Continuous adjustment of the daybolt up to 3/8" without removing the lock box
- ✓ Stainless steel mechanism



Recommended keeps



SAKL QF P. 95



SHKL QF P. 95



MODULEC-SA

Order codes

For square profiles

ror square profiles	
LAKQ3030 U2L	For profiles 1-1/4" to 2" 24h SHIPPING
LAKQ4040 U2L	For profiles 1-1/2" to 2-1/2" 24h SHIPPING
LAKQ6060 U2L	For profiles 2-1/2" to 3" 24h SHIPPING
For round profiles	
LARQ3030 U2L	For profiles 1-1/4" to 2" 24h SHIPPING
LARQ4040 U2L	For profiles 1-1/2" to 2-1/2" 24h
LARQ6060 U2L	For profiles 2-1/2" to 3"

For flat profiles

LAPQ1010 U2L For profiles 3/8" to 1-1/4" 24h SHIPPING

Recommended handles







3006I P. 165



3006D P. 165



KIDLOC P. 161

Easy exit handles & accessories



PUSHBAR-L-P. 163



3006PUSH P. 162



ROLLTOP P. 157



DRILL-FIX P. 151







Surface mounted gate lock for Swiss profile cylinder

LAKQ U3 (Patented)

Industrial lock with aluminum housing and stainless steel mechanism. This lock is delivered without a cylinder and is suitable for use with a 7/8" cylinder (Swiss profile cylinder). The latch and dead bolt have 3/4" continuous adjustment to allow perfect latching / locking of the mechanism. A stainless steel throw of 7/8" guarantees secure locking. Handle depends on color: silver locks ship standard with the modern aluminum handle pair and all other colors ship with the black ornamental handle pair. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap. For a fast and highly precise installation, we recommend using the Drill-Fix drilling jig.









Lock box color options












Specifications

- SO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Lockbox for Swiss profile cylinder (Ø7/8")
- \checkmark Throw of the dead bolt, 7/8" in 1 turn of the key
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ Center distance bolts: 2-3/8"
- Continuous adjustment of the daybolt up to 3/8" without removing the lock box



Recommended keeps



SHKL QF P. 95



SAKL QF P. 95



MODULEC-SA P. 29

Order codes

For square profiles

LAKQ3030 U3L	For profiles 1-1/4" to 2"
LAKQ4040 U3L	For profiles 1-1/2" to 2-1/2"
LAKQ6060 U3L	For profiles 2-1/2" to 3"

For round profiles

LARQ3030 U3L For profiles 1-1/4" to 2"

LARQ4040 U3L For profiles 1-1/2" to 2-1/2"

LARQ6060 U3L For profiles 2-1/2" to 3"

For flat profiles

LAPQ1010 U3L For profiles 3/8" to 1-1/4"



Recommended handles









3006M P. 164

3006I P. 165

3006D P. 165

3006R P. 166

Easy exit handles & accessories



PUSHBAR-L-P. 163



3006PUSH P. 162



ROLLTOP P. 157



DRILL-FIXP. 151





NEW SHIPPING

Surface mounted US Mortise cylinder gate lock (USA)

LUKY J5 (Patent pending)

Excellent gate lock with aluminum housing and stainless steel mechanism. Specially developed to use with a standard 1-1/8" Mortise cylinder. Comes standard with 5pin keyed alike or keyed different (drilled 6pin). The latch and dead bolt have 3/8" continuous adjustment to allow perfect alignment of the locking mechanism. A stainless steel throw of 7/8" guarantees secure locking. Black lock standard provided with 3006FA handle (zamac), silver comes with aluminum handle (3006M).










Lock box color options





Specifications

- ✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray
- Mortise profile cylinder
- ✓ Fixing cylinder inch thread 8/32"
- ✓ Easy left or right changing of the self-latching daybolt
- ightharpoonup Throw of the dead bolt, 7/8" in 1 turn of the key
- ✓ Key-operated self-latching bolt, allows Free Exit application
- \checkmark Adjustment of the bolts up to 3/8" continuous without removing the lock
- ✓ Interchangeable with all Locinox locks
- ▼ The lock box requires a 3-3/8" spacing to the first picket, fitting nicely into most gates



Recommended keeps







SAKL QF



MODULEC-SA

Order code

For square profiles	
LUKY3030 J5L	For profiles 1-1/4" to 1-3/8" 24h SHIPPING
LUKY4040 J5L	For profiles 1-1/2" to 1-3/4" 24h SHIPPING
LUKY5050 J5L	For profiles 1-7/8" to 2" 24h SHIPPING
LUKY6060 J5L	For profiles 2-1/2" 24h SHIPPING
For flat profiles	
LUPY 1010 J5L	For profiles 3/8" 24h

LUPY2020 J5L For profiles 7/8" to 1-1/8" 24h



Recommended handles



3006M P. 164



3006FA P. 165

Accessories



ROLLTOP P. 157



LOCITOOL LA P. 157



MRT-118 P. 176



DRILL-FIX P. 151





Locks for swing gates



Surface mounted anti-panic gate lock

LPKQ U2

Stainless steel superior anti-panic lock with aluminum housing. Escape or exit from inside is possible at all times by operating the handle. Mechanical access from the outside is always possible by operating the cylinder. This lock is compatible with an optional PUSHhandle or PUSHBAR. The latch and dead bolt have 3/4" continuous adjustment to allow latching / locking of the mechanism. A stainless steel throw of 7/8" guarantees secure locking. For a fast and highly precise installation, we recommend using the Drill-Fix drilling jig.











Lock box color options














Specifications

- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- ✓ Easy left or right changing of the self-latching daybolt
- ▼ Throw of the dead bolt, 7/8" in 1 turn of the key
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ Center distance bolts: 2-3/8"
- Continuous adjustment of the daybolt up to 3/8" without removing the lock box
- ✓ Tested up to 500 000 movements
- ✓ Can be applied to gates complying with EN 179



Recommended keeps



SAKL QF P. 95



SHKL QF P. 95



MODULEC-SA

Order codes

For cauaro profilos

for square profiles	
LPKQ4040 U2L	For profiles 1-1/2" to 2-1/2"
LPKQ6060 U2L	For profiles 2-1/2" to 3"
LPKQ8080 U2L	For profiles 3" to 4"
LPKQ100100 U2L	For profiles 4" to 4-1/2"

Recommended handles



PUSHBAR-L-P. 163



3006PUSH P. 162

Accessories



ROLLTOP P. 157



3970USA P. 150



P. 157



DRILL-FIXP. 151





Locinox supports you in your logistic process. Select and compose your own gate hardware set and avoid stock ruptures or false deliveries of gate components to your customers. The set components are all together and, above all, packed in a robust and weatherproof box. If you wish, your logo can be put on the box for a maximal support of your brand. We will be glad to add your manuals or any other information according to your needs.



100% modular



Time saving



No research work

















Surface mounted double cylinder gate lock for swing gates

LDKZ D1

Industrial swing gate lock with aluminum housing and stainless steel mechanism with 2 cylinders. You only need to use 1 of the cylinders in order to open or to close the lock. This lock is ideal to use to provide entry to third parties like fire men or waste collectors. The double locking of the solid stainless steel night bolt also ensures a secure closing.











Lock box color options










Specifications

- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- ✓ For gate profiles from 3/8" till 3-15/16"
- ✓ Stainless steel mechanism
- ✓ Non-adjustable latch and dead bolt
- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Double throw of the night bolt 1"
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ Interchangeable with all Locinox locks



Recommended keeps







SHKL QF P. 95



MODULEC-SA



Order codes

For square profiles

Tor square promes	
LDKZ3030 D1L	For profiles of 1-1/4"
LDKZ4040 D1L	For profiles of 1-1/2"
LDKZ5050 D1L	For profiles of 2"
LDKZ6060 D1L	For profiles of 2-3/8"
LDKZ8080 D1L	For profiles of 3-1/8"
LDKZ100100 D1L	For profiles of 4"
For round profiles	
LDRZ3030 D1L	For profiles of 1-1/4"
LDRZ4040 D1L	For profiles of 1-1/2"
LDRZ5050 D1L	For profiles of 2"
IDP76060 D11	For profiles of 2 2 /0"

For flat profiles

L	DPZ1010 D1L	For profiles of 3/8"		
L	DPZ2323 D1L	For profiles of 29/32		

Cylinders and accessories



3012-POC- P. 173



3071 - P. 176



DRILL-FIX P. 151



3970USA P. 150





VINCI - Surface mounted mechanical code lock

LMKQ V2 (Patented)

High quality mechanical code lock for swing gates with aluminum housing and stainless steel mechanism. This lock is 100% mechanical, so no batteries or electricity are required, which makes it very easy to equip any gate with access control. The dead bolt is used to over ride the code panel and secure the gate. The latch and dead bolt have 3/4" continuous adjustment to allow perfect latching / locking of the mechanism. A stainless steel throw of 7/8" guarantees a secure locking. Ships standard with the Club handle pair. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap.













Lock box color options












9010

Specifications

- ✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray
- ♥ Operational code panel on both sides
- ✓ Independent entrance and exit codes
- ✓ Polyamide rain and dust cover
- ✓ Easy and fast set-up or modification of the access codes
- With adjustable rollerbolt for easy closing
- Automatic code reset after opening by means of the handle
- ✓ Anti-code detection with integrated security press plate
- ✓ Interchangeable with all Locinox locks



Recommended keeps







SHKL QF

Order codes

For square profiles

LMKQ3030 V2L For profiles 1-1/4" to 2" 24h SHIPPIN LMKQ4040 V2L For profiles 1-1/2" to 2-1/2" 24h SHIPPING LMKQ6060 V2L For profiles 2-1/2" to 3" 24h

For round profiles

LMRQ3030 V2L For profiles 1-1/4" to 2" LMRQ4040 V2L For profiles 1-1/2" to 2-1/2" 24h

LMRQ6060 V2L For profiles 2-1/2" to 3"

For flat profiles

LMPQ1010 V2L For profiles 3/8" to 1-1/4" 24h SHIPPING





Recommended handles







3006C P. 164

30061 P. 16.5

3006D P. 165

Compatible with every gate closer







VERTICLOSE-2-P. 21



MAMMOTH-180 P. 15



TIGER P. 14







FREE VINCI - Surface mounted mechanical code lock with secured entrance and free exit

LFKQ X1 (Patented)

One sided code mechanical code lock (Free Exit) for swing gates with aluminum housing and stainless steel mechanism. The Free Vinci offers you the ability to secure one side with a code for entrance while leaving the other side free for exit. This lock is 100% mechanical, so no batteries nor electricity are required, which makes it very easy to equip any gate with access control. The latch bolt has 3/4" continuous adjustment to allow perfect alignment of the locking mechanism. Ships standard with the Club handle for the secure "code" side and a round knob for the exit side. The PUSH handle is available for the exit side. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap.













Lock box color options








Specifications

- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- ✓ Entrance secured by code, free exit
- ♥ Code panel with stainless steel push buttons on one side
- ✓ Polyamide rain and dust cover
- With adjustable rollerbolt for easy closing
- Extremely strong and user-friendly mechanism
- ✓ Automatic code reset after opening by means of the handle
- ✓ Interchangeable with all Locinox locks



Recommended keeps








SHKL QF

Order codes

For savare profiles

ror square promes	
LFKQ3030 X1L	For profiles 1-1/4" to 2" 24h SHIPPING
LFKQ4040 X1L	For profiles 1-1/2" to 2-1/2" 24h SHIPPING
LFKQ6060 X1L	For profiles 2-1/2" to 3" 24h SHIPPING
For round profiles	
LFRQ3030 X1L	For profiles 1-1/4" to 2"
LFRQ4040 X1L	For profiles 1-1/2" to 2-1/2" 24h
LFRQ6060 X1L	For profiles 2-1/2" to 3"
For flat profiles	





Compatible easy exit handles



PUSHBAR-L-P. 163



3006PUSH P. 162



Surface mounted electric gate lock with Fail Open functionality

LEKQ U4 (Patented)

Electrical lock with aluminum housing and stainless steel mechanism. The lock functions as a "buzz in - buzz out" device and connects to any 12 Volt control system. The handles are blocked when the lock is powered. The dead bolt is used to override the control system and secure the gate. The latch and dead bolt have 3/4" continuous adjustment to allow perfect latching / locking of the mechanism. A stainless steel throw of 7/8" guarantees secure locking. Ships standard with the round knob handle set. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap.









Min. 3-3/4"



Lock box color options











Specifications

- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- ▼ Fail Open: Lock is open when power is interrupted
- ✓ Blocking or releasing of the handles
- ✓ Easy left or right changing of the self-latching daybolt
- \checkmark Throw of the dead bolt, 7/8" in 1 turn of the key
- ✓ Key-operated self-latching bolt, allows Free Exit application
- Continuous adjustment of the daybolt up to 3/8" without removing the lock box
- ✓ Interchangeable with all Locinox locks
- ✓ Voltage: 12V AC/DC

33-9/16 0 03/8" (2x) 05/8" (2x) 05/8" (4x) 05/8" (4x) 05/8" (2x) 0

Recommended keeps







SHKL QF

Order codes

For square profiles

LEKQ3030 U4L	For profiles 1-1/4" to 2" 24h
LEKQ4040 U4L	For profiles 1-1/2" to 2-1/2" 24h SHIPPING
LEKQ6060 U4L	For profiles 2-1/2" to 3"

For round profiles

LERQ3030 U4L For profiles 1-1/4" to 2" **LERQ4040 U4L** For profiles 1-1/2" to 2-1/2"

LERQ6060 U4L For profiles 2-1/2" to 3"







3006R P. 166



3006C

3006C P. 164



DVK-HD P. 45



DVK

Recommended power supplies



DC-ACCESS-12V-20W



AC-TRANS-12V-25W



DC-POWER-12V-20W







Lock box color options











Surface mounted electric gate lock with Fail Close functionality

LIKQ U2 (Patented)

Electric lock with aluminum housing and stainless steel mechanism. The lock functions as a "buzz in - buzz out" device and connects to any 12 Volt control system. The handles are blocked when the lock has no power (Fail Close). The dead bolt is used to override the control system and secure the gate. The latch and dead bolt have 3/4" continuous adjustment to allow perfect latching / locking of the mechanism. A stainless steel throw of 7/8" guarantees secure locking. Ships standard with the round knob handle set. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap.











Specifications

✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray

9010

- ▼ Fail Close: Lock is closed when power is interrupted
- ✓ Blocking or releasing of the handles
- ✓ Easy left or right hand changing
- ightharpoonup Throw of the dead bolt, 7/8" in 1 turn of the key
- ✓ Key-operated self-latching bolt, allows Free Exit application
- \checkmark Continuous adjustment of the daybolt up to 3/8" without removing the
- ✓ Interchangeable with all Locinox locks
- ✓ Voltage: 12V AC/DC

MIN. 3-3/4" 2x Ø 3/8" 2x Ø 9/16" 4x Ø 11/16" D-@@-(

Recommended keeps



SAKL QF



SHKL QF

Order codes

For square profiles		
LIKQ3030 U2L	For profiles 1-1/4" to 2"	
LIKQ4040 U2L	For profiles 1-1/2" to 2-1/2"	
LIKQ6060 U2L	For profiles 2-1/2" to 3"	
For round profiles		
LIRQ3030 U2L	For profiles 1-1/4" to 2"	
LIRQ4040 U2L	For profiles 1-1/2" to 2-1/2"	





Recommended handles & cable guiding



LIRQ6060 U2L For profiles 2-1/2" to 3"

3006R P. 166



3006C P. 164



DVK-HD P. 45



DVK P. 44

Recommended power supplies



DC-ACCESS-12V-20W P. 46



AC-TRANS-12V-25W



DC-POWER-12V-20W P. 46







Small surface mounted ornamental gate lock

LAKY F2 (Patented)

Ornamental lock with aluminum housing and stainless steel mechanism. We recommend this lock as the standard for your ornamental gates as it only requires a 3-3/8" spacing to the first picket and will fit nicely into most gates. The latch and dead bolt have 3/8" continuous adjustment to allow perfect latching / locking of the mechanism. A stainless steel throw of 7/8" guarantees secure locking. Ships standard with the black zamac ornamental handle pair. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap.









Lock box color options












Specifications

- ✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray
- ✓ Easy left or right changing of the self-latching daybolt
- ▼ Throw of the dead bolt, 7/8" in 1 turn of the key
- ✓ Adjustment of the bolts up to 3/8" continuous without removing the lock
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ Center distance bolts: 2-3/8"



Recommended keeps







SPKZ-TK



MODULEC-SA

Order codes

For square profiles

Tot square promes	,
LAKY3030 F2L	For profiles 1-1/4" to 1-3/8" 24h
LAKY4040 F2L	For profiles 1-1/2" to 1-3/4" 24h SHIPPING
LAKY5050 F2L	For profiles 1-7/8" to 2" 24h SHIPPING
For round profiles	
LARY3030 F2L	For profiles 1-1/4" to 1-3/8"
LARY4040 F2L	For profiles 1-1/2" to 1-3/4"
LARY5050 F2L	For profiles 1-7/8" to 2"

For flat profiles

LAPY1010 F2L For profiles 3/8" 24h SHIPPING

Compatible handles









3006FA 30061 P. 165 P. 165



KIDLOC P. 161

Ornamental hinges



G-ORNA-LR P. 122



G-ORNA-WP P. 122



GDP P. 125



GP-U-BASE P. 125







Large surface mounted ornamental gate lock

LAKQ H2 (Patented)

Ornamental lock with aluminum housing and stainless steel mechanism. We recommend this wider ornamental lock for gates that have 3-3/4" spacing to the first picket on ornamental gates. The latch bolt and dead bolt have 3/4" continuous adjustment to allow perfect alignment of the locking mechanism. A stainless steel throw of 7/8" guarantees secure locking. Ships standard with the black zamac ornamental handle pair. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap.









Lock box color options














Specifications

- ✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray
- ✓ Easy left or right changing of the self-latching daybolt
- ▼ Throw of the dead bolt, 7/8" in 1 turn of the key
- ♥ Continuous adjustment of the daybolt up to 3/8" without removing the lock box
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ Center distance bolts: 2-3/8"



Recommended keeps



SPKZ QF



SPKZ-TK



MODULEC-SA

Order codes

For square profiles

Tot square promes	
LAKQ3030 H2L	For profiles 1-1/4" to 2" 24h SHIPPING
LAKQ4040 H2L	For profiles 1-1/2" to 2-1/2" 24h SHIPPING
LAKQ6060 H2L	For profiles 2-1/2" to 3" 24h SHIPPING
For round profiles	
LARQ3030 H2L	For profiles 1-1/4" to 2"
LARQ4040 H2L	For profiles 1-1/2" to 2-1/2"
LARQ6060 H2L	For profiles 2-1/2" to 3"
For flat profiles	

Compatible handles

LAPQ1010 H2L For profiles 3/8" to 1-1/4" 24h SHIPPING



3006FA P. 165



3006D P. 165



KIDLOC P. 161

Ornamental hinges



G-ORNA-LR P. 122



G-ORNA-WP P. 122



1005WPF P. 124





Lock box color options













Specifications

- ✓ Easy left or right changing of the self-latching daybolt

- ✓ Polyamide lock box and handles
- ✓ Center distance bolts: 2-3/8"
- ✓ For 1-1/2" gate profiles only
- ✓ Interchangeable with all Locinox locks

Surface mounted garden gate lock

LAKZ P1


Economical garden walk gate lock with polyamide housing and nonadjustable stainless steel mechanism. This lock is recommended for all your small gates and for residential gates where price is a driving issue. A stainless steel throw of 7/8" guarantees secure locking. Ships standard with the black poly handle pair. The latch gap required is keep dependent, but the SMKL polyamide keep requires a 1-1/8" latch gap.











Recommended keeps



SMKL QF



SKRZ P. 96



SAKL QF

Order codes

For square profiles

LAKZ4040 P1L For profiles of 1-1/2"

For round profiles

LARZ4040 P1L For profiles of 1-1/2"



Recommended handles



3006P P. 166

3006G P. 165



KIDLOC P. 161

Accessories



3006PC P. 94



ROLLTOP P. 157



3970USA P. 150



DRILL-FIX P. 151







Surface mounted child safety lock

LAKZ P1 WSI (Patented)

Child safety lock with non-adjusting stainless steel mechanism and polyamide housing. This lock conforms to the European swimming pool standard NF P90-306. The Kidloc handle set prevents the access to the pool for small children. The unique rollerbolt reduces latch resistance allowing the gate close easier. A stainless steel throw of 7/8" guarantees secure locking. Ships standard with the Kidloc handle pair. The latch gap required is keep dependent, but the SMKL polyamide keep requires a 1-1/8" latch gap.













Lock box color options














Specifications

- ✓ Polyamide lock box
- With adjustable rollerbolt for easy closing
- With Kidloc: child safety handle for swimming pools
- a security knob and a stainless steel rollerbolt. Conforms to swimming pool standard NF P90-306



Recommended keeps




SMKL QF

SKRZ

Order codes

LAKZ4i4i P1L WSI For profiles of 1-1/2"

LAKZ5i5i P1L WSI For profiles of 2"







TIGER P. 14



MAMMOTH-180 P. 15



LION P. 18





SWING40 P. 130

Accessories



KIDLOC P. 161



ROLLTOP P. 157



3970USA P. 150



DRILL-FIX P. 151







Swimming pool gate lock

TWIST40 (Patented)

The TWIST40 swimming pool gate lock has a stainless steel mechanism and black PA and powder coated aluminum housing. Installs into the gate upright at the top of the gate. The TWIST40 opens with a "press and twist" action which prevents the access to the pool for small children. The unique rollerbolt reduces latch resistance allowing the gate to close easier. This lock conforms to the European swimming pool standard NF P90-306. For gate profiles of 1-1/2" only. 16 Ga tube only.











Lock box color options










Specifications

9010

- ✓ We strongly advise you to read the swimming pool standard NF P90-306 before manufacturing any swimming pool gate
- ✓ For 1-1/2" gate profiles only



Recommended keeps



STK QF







STR60 QF

Order code

TWIST40 For profiles of 1-1/2"



Recommended gate closers





P. 15



TIGER P. 14







SWING40 P. 130

Cylinder & compatible hinges









3012-46-STD P. 174

GBM 12 P. 131

GBM12-DP P. 131

GBM 16-DP P. 132







LEONARDO - Mechanical code lock for sliding gates

LLKZ V2 (Patented)

Mechanical code lock for sliding gates with aluminum housing and stainless steel mechanism. Since this lock is 100% mechanical, no electricity or batteries are required, so this system gives you the opportunity to equip any sliding gate with access control. The dead bolt is used to override the code panel and secure the gate. The unique Twistfinger catch bolt and auto-correcting keep ensures latching of your sliding gate. Catch bolts are available to fit gate frame profiles from 1-1/2" to 5" wide. Works with cantilever gate systems or fixed roller systems. Ships standard with the Club handle pair.









Lock box color options












Specifications

- ✓ 100% mechanical: no battery or electricity required
- ✓ Adjustable for horizontal or vertical mounting of the keep (catch bolt)
- ♥ Operational code panel on both sides
- ✓ Independent entrance and exit codes
- ✓ Equipped with dust and rain covers
- ✓ Accepts 4 to 6 digit code combinations
- ✓ Automatic code reset after opening by means of the handle
- Anti-code detection with integrated security press plate
- Stainless steel collar around the Twistfinger prevents cutting through the Twistfinger (catch bolt)



Recommended keep and adapter case





SSKZ QF P. 98

O-SET P. 98



Order codes

For square profiles	
LLKZ4040 V2L	For profiles of 1-1/2"
LLKZ5050 V2L	For profiles of 2" 24h SHIPPING
LLKZ6060 V2L	For profiles of 2-3/8" 24h SHIPPING
LLKZ8080 V2L	For profiles of 3-1/8"
LLKZ100100 V2L	For profiles of 4"
LLKZ120120 V2L	For profiles of 4-3/4"
For round profiles	
LLRZ4040 V2L	For profiles of 1-1/2"
LLRZ5050 V2L	For profiles of 2"
LLRZ6060 V2L	For profiles of 2-3/8"
LLRZ8080 V2L	For profiles of 3-1/8"
LLRZ100100 V2L	For profiles of 4"

Recommended accessories

LLRZ120120 V2L For profiles of 4-3/4"



3970LS

P. 150







LOCITOOL LA P. 157









Surface mounted sliding gate lock

LSKZ U2 (Patented)

Slide gate lock for manual sliding gates with aluminum housing and stainless steel mechanism. The key is used to override the lever action and secure the gate. The unique Twistfinger catch bolt and auto-correcting keep ensures latching of your sliding gate. Catch bolts are available to fit gate frame profiles from 1-1/2" to 5" wide. Works with cantilever gate systems or fixed roller systems.

SHIPPING







Lock box color options












Specifications

- ✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray
- Adjustable for horizontal or vertical mounting of the keep (catch bolt)
- ✓ Mounting with 2 hex head socket screws
- ✓ Innovative closing system
- Stainless steel collar around the Twistfinger prevents cutting through the Twistfinger (catch bolt)




Recommended keep and adapter case





SSKZ QF

O-SET P. 98



Order codes

For square profiles	
LSKZ4040 U2L	For profiles of 1-1/2"
LSKZ5050 U2L	For profiles of 2" 24h SHIPPING
LSKZ6060 U2L	For profiles of 2-3/8" 24h
LSKZ8080 U2L	For profiles of 3-1/8"
LSKZ100100 U2L	For profiles of 4"
LSKZ120120 U2L	For profiles of 4-3/4"
For round profiles	
LSRZ4040 U2L	For profiles of 1-1/2"
LSRZ6060 U2L	For profiles of 2-3/8"
LSRZ8080 U2L	For profiles of 3-1/8"
LSRZ100100 U2L	For profiles of 4"
LSRZ120120 U2L	For profiles of 4-3/4"

Recommended handle & accessories









3006S P. 164

3970LS P. 150

DRILLØ15 P. 150

LOCITOOL LA P. 157







Double Cylinder Lock

LGKZ D1

Industrial sliding gate lock with aluminum housing and stainless steel mechanism with 2 cylinders. You only need to use 1 of the cylinders in order to open or to close the lock. This lock is ideal to use to provide entry to third parties like the firemen or waste collectors.







Lock box color options










Specifications

- ✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray
- ✓ For gate profiles from 1-1/2" until 4-3/4"
- Adjustable for horizontal or vertical mounting of the keep (catch bolt)
- ✓ Innovative closing system
- Twistfinger (catch bolt)



Recommended keeps





SSKZ QF P. 98

O-SET



Order codes

For square profiles

LGKZ4040 D1L	For profiles of 1-1/2"
LGKZ5050 D1L	For profiles of 2"
LGKZ6060 D1L	For profiles of 2-3/8"
LGKZ8080 D1L	For profiles of 3-1/8"
LGKZ100100 D1L	For profiles of 4"
LGKZ120120 D1L	For profiles of 4-3/4"
LGKZ120120 D1L For round profiles	For profiles of 4-3/4"
	For profiles of 4-3/4" For profiles of 1-1/2"
For round profiles	
For round profiles LGRZ4040 D1L	For profiles of 1-1/2"
For round profiles LGRZ4040 D1L LGRZ5050 D1L	For profiles of 1-1/2" For profiles of 2"

Cylinders and accessories

LGRZ120120 D1L For profiles of 4-3/4"









3012-POC-P. 173

3071-P. 176

30068 P. 164

DRILL-FIX P. 151





Mortise lock with 3/4" backset for profiles of 1-9/16" or more

FORTYLOCK (Patented)

Mortise lock with 100% stainless steel mechanism. The stainless steel adjustable self-latching bolt and hook combined with the right keep guarantee a strong and solid closed gate where the gate wings can not be pulled apart or forced open. The lock can be installed on metal, aluminum and PVC gates. Thanks to the patented "Click-It" system, installing the lock can be done in a matter of seconds.










SHIPPINGSpecifications

- ✓ Lock mechanism with cover plate protects against dirt penetration
- ✓ Patented "Click-It" system makes thread tapping unnecessary
- ✓ Continuous adjustment of the daybolt up to 3/8" without dismounting the lockbox
- Stainless steel mechanism, hook, front plate and latch bolt
- ✓ Throw of the hook: 13/16"
- Optional: Cover shield for handle & cylinder holes in aluminum, polyamide or stainless steel
- ✓ Handles to be ordered separately



Recommended keeps



SFKP P. 105



SFKI P. 104



SFKM P. 105

Order code

FORTYLOCK For profiles of 1-1/2"

Fortysets

 FORTYSET-40I-GP FORTYLOCK + SFKI + 3020-HYB-STD + 3006G + 3012-54-STD-VSZ

 FORTYSET-40I-MA FORTYLOCK + SFKI + 3020-HYB-ALU + 3006M-H + 3012-54-STD-VSZ

 FORTYSET-40P-GP FORTYLOCK + SFKI + 3020-HYB-STD + 3006G + 3012-54-STD-VSZ



Optional cover shields



3020-HYB-A2 P. 86



3020-HYB-ALU P. 86



3020-HYB-STD P. 86



3006G P. 165



3006D P. 165



3006J-H P. 164



3006I-H P. 165







Mortise lock with 1-3/16" backset for profiles of 2" or more

FIFTYLOCK (Patented)

Prime insert lock with 100% stainless steel mechanism. The stainless steel, adjustable self-latching bolt and hook combined with the correct keep guarantee a strong and solid closed gate where the gate wings can not be pulled apart or forced open. The lock can be installed on metal, aluminum and PVC gates. Thanks to the patented "Click-It" system the lock is mounted in seconds.












Specifications

- ✓ Throw of the hook: 13/16"
- ✓ Compatible with all Europrofile cylinders
- ✓ Handles to be ordered separately
- Optional: Cover shield for handle & cylinder holes in aluminum, polyamide or stainless steel



Recommended keeps



SFKB P. 104



SFKI P. 104



SFKM P. 105

Order code

FIFTYLOCK Mortise lock with 1-3/16" backset for profiles of 2" or more



Optional cover shields



3020-HYB-A2 P. 86



3020-HYB-ALU P. 86



3020-HYB-STD P. 86





3006G P. 165

3006D P. 165

3006J-H P. 164

3006I-H P. 165





Insert lock with 1-9/16" backset for profiles of 2-3/8" or more

SIXTYLOCK (Patented)

Prime insert lock with 100% stainless steel mechanism. The stainless steel, adjustable self-latching bolt and hook combined with the right keep guarantee a strong and solid closed gate where the gate wings can not be pulled apart or forced open. The lock can be installed on metal, aluminum and PVC gates. Thanks to the patented "Click-It" system the lock is mounted in seconds.










Specifications

- ♥ Stainless steel mechanism, hook, front plate and latch bolt
- Continuous adjustment of the daybolt up to 3/8" without dismounting the lockbox
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ Throw of the hook: 13/16"

- ✓ Handles to be ordered separately
- Optional: Cover shield for handle & cylinder holes in aluminum, polyamide or stainless steel



Recommended keeps



SFKB P. 104



SFKI P. 104



SFKM P. 105

Order code

SIXTYLOCK Insert lock with 1 9/16" backset for profiles of 2 3/8" or more



Optional cover shields



3020-HYB-A2 P. 86



3020-HYB-ALU P. 86



3020-HYB-STD P. 86



3006G P. 165



3006D P. 165



3006I-H P. 165



3006J-H P. 164







Mortise lock for ornamental gates

H-METAL (Patented)

Mortise lock with 100% stainless steel mechanism. This model can be installed on steel, aluminum, or wood gates. The massive stainless steel hook and adjustable latch bolt makes this a one of a kind lock. The combination of the hook (dead bolt) with the SHKM or SHKW keep provides a secure anchoring of your gate while preventing the gate from being pried open as the dead bolt's "hook" locks into the keep's anchoring plate. These locks can be used on metal, wood or aluminum gates or even with our fully prepared profiles. The latch gap required is keep dependent, but the SHKM Hybrid keep requires a 7/8" latch gap.








Specifications

- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Adjustment of the latch bolt up to 3/4" continuous without removing the lock
- Stainless steel mechanism, hook, front plate and latch bolt
- ✓ Handles to be ordered separately
- ✓ Throw of the hook: 1-1/4"
- ✓ Hook in combination with the keep provides secure anchoring.
- ✓ With coverplate for lock mechanism protection against dirt penetration inside the posts
- ✓ Cover shield for handle & cylinder holes to be ordered separately



Recommended keeps





Order codes

Insert lock	
H-METAL	For profiles with a min. depth of 2-1/2" 24h SHIPPING
Hybrid kits: Insert lock	+ accessories
H-METAL-SET-54-M-	H-METAL + 3020-HYB-STD (2x) + 3006M-H + SHKM-ALUM + 3012-54-STD-VSZ
H-METAL-SET-54-I-	H-METAL + 3020-HYB-A2 (2x) + 3006I-H + SHKM-ALUM + 3012-54-STD-VSZ
H-METAL-SET-80-M-	H-METAL + 3020-HYB-STD (2x) + 3006M-H + SHKM-ALUM + 3012-80-STD-VSZ 24h
H-METAL-SET-80-I-	H-METAL + 3020-HYB-A2 (2x) + 30061-H + SHKM-ALUM + 3012-80-STD-VSZ 24h



Cover shields and accessories







3020-HYB-ALU P. 86



3020-HYB-STD P. 86



HLT P. 85







3006I-H P. 165

3006M-H P. 164

3006J-H P. 164



24h SHIPPING

Mortise lock for ornamental gates, fits welding lock box

H-METAL-WB (Patented)

Mortise lock with 100% stainless steel mechanism. This model can be installed on steel or aluminum gates and fits perfectly into our custom welding box. The massive stainless steel hook and adjustable latch bolt makes this a one of a kind lock. The combination of the hook (dead bolt) with the SHKM or SHKW keep provides a secure anchoring of your gate while preventing the gate from being pried open as the dead bolt's "hook" locks into the keep's anchoring plate. The latch gap required is keep dependent, but the SHKM Hybrid keep requires a 7/8" latch gap.










Specifications

- ✓ Insert lock with a backset of 1-3/8"
- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Key-operated self-latching bolt, allows Free Exit application
- Adjustment of the latch bolt up to 3/4" continuous without removing the lock
- ✓ Throw of the hook: 1-1/4"
- ✓ Hook in combination with the keep provides secure anchoring
- With coverplate for lock mechanism protection against dirt penetration inside the posts
- ✓ Handles to be ordered separately
- ✓ Cover shield for handle & cylinder holes to be ordered separately



Recommended keeps



P. 101





HWKB P. 102



SEH P. 28

Order code

H-METAL-WB For hybrid welding lock box - HWLB 24h



Cover shields and accessories



3020-HYB-A2 P. 86



3020-HYB-ALU P. 86



3020-HYB-STD P. 86



HWLB P. 8.5



3006I-H P. 165



3006M-H P. 164



3006J-H








Gate frame profile for Mortise lock (H-METAL)

saving time and money on every gate.

HLT

Fully prepared steel profile for Mortise lock. Use this as your gate upright and ensure a perfect and simple installation of the lock without having to do the cut-outs yourself,



Specifications

- ✓ Profile cut-out for H-METAL
- ✓ Length: 78-3/4"
- ▼ Fully prepared gate ends simplify building your gates

Compatible lock and accessories









H-METAL P. 83

P. 86

3020-HYB-ALU P. 86

3020-HYB-STD P. 86

Order code

HLT Mild steel welding tube, 78" long, for H-METAL lock

Weldable lock box for H-METAL-WB

HWLE


Metal welding box for hybrid Mortise lock.



24h SHIPPING

Specifications

- Size: 2-3/8" x 1-9/16" x 8-5/8" (5/64" thickness, 14 gauge)



Compatible lock and accessories







H-METAL-WB P. 84

3020-HYB-A2 P. 86

3020-HYB-ALU P. 86

3020-HYB-STD P. 86



HWLB Mild steel welding lock box for H-METAL-WB lock SHIPPING









Cover shield for mortise locks


3020-HYB

Cover shield for handle & cylinder holes of Locinox mortise locks. Available in aluminum, stainless steel or polyamide for an aesthetic finish.

Specifications

Order codes 3020-HYB-A2

- ▼ Cover shield for handle & cylinder holes
- Standardised gate pattern: compatible with HLT welding profile and HWLB for Hybrid locks



Compatible locks





P. 89





3020-HYB-ALU Aluminum cover shield for mortise locks 24h SHIPPING

3020-HYB-STD Polyamid cover shields for mortise locks 24h SHIPPING

Stainless steel cover shields for mortise locks 24h

H-METAL P. 83

FORTYLOCK P. 80

SIXTYLOCK P. 82









Mortise Lock without handle for sliding and swing gates

H-COMPACT (Patented)

Mortise lock with 100% stainless steel mechanism. This model is specially designed for mechanical closure of sliding gates and double leaf swinging gates. It can be used for manual locking of automated slide gates. The absence of a handle prevents people from climbing over the fence using the handle as a step. The latch gap required is keep dependent, but the SHKC Hybrid keep requires a 3/8" latch gap.








Specifications

- ✓ Insert lock with a backset of 1-3/8"
- Suitable for swing and sliding gates
- Mechanism, hook, front plate, chassis and all internal mechanical parts are 100% stainless steel
- ✓ Throw of the hook: 1-1/4"
- ✓ Hook in combination with the keep provides secure anchoring.
- ✓ Without latch bolt
- (Removable) pin prevents lifting the hook from the keep when used in a sliding gate
- With coverplate for lock mechanism protection against dirt penetration inside the posts



Recommended keep

SHKC P. 103

Order code

H-COMPACT For profiles with a min. depth of 2-1/2"





Hardware for wooden gates

Wood is more popular than ever as a construction material in the gate and fence world. Wood lives and therefore it's important to know that wood swells and shrinks relative to weather changes. That is why here at Locinox we developed a range of products for wooden gates which make sure that your gate always closes perfectly, even after 10 years!







Left/right reversible

One wing gate:

H-WOOD

100% stainless steel insert lock with a backset of 2-3/8". The perfect solution for wooden gates. The adjustable self-latching bolt in combination with the stainless steel hook (dead bolt) provides extra security.

SHKW

Stainless steel keep for Hybrid insert locks. This unique keep in combination with the Hybrid lock ensures a strong gate anchoring. This configuration is with wood screws for wooden posts.

MAMMOTH-180

An elegant self-closing hinge which opens smoothly and closes consistently gates up to 330 lbs and this regardless of the outside temperatures (patented system). Force, closing speed and final snap are all individually adjustable.



- 1 SHKW: p. 103
- 2 H-WOOD: p. 89
- 3 MAMMOTH-180: p. 15
- 4 DINO: p. 126



- 1 4DW: p. 128
- ② VSF: p. 141
- 3 SHKW: p. 103
- 4 H-WOOD: p. 89

Double wing gate:

Aesthetic, vandal proof hinge for wooden gates. The stainless steel hinge can be adjusted in 4 dimensions. Height, depth, left/right alignment and rotational direction can be adjusted.

Standard drop bolt with hot-dip galvanized bolt. The drop bolt is auto-locked between the gate wings.





Mortise lock for wooden gates

H-WOOD (Patented)

Mortise lock with 100% stainless steel mechanism. This model is specially designed for wood gates. The adjustable latch bolt in combination with the stainless steel hook (dead bolt) provides extra security. The combination of the hook (dead bolt) with the SHKW keep provides a secure anchoring of your gate while preventing the gate from being pried open as the dead bolt's "hook" locks into the keep's anchoring plate. The latch gap required is keep dependent, but the SHKW Hybrid keep requires a 7/8" latch gap.










Specifications

- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Key-operated self-latching bolt, allows Free Exit application
- Adjustment of the latch bolt up to 3/4" continuous without removing the lock
- ${\color{red} arnothing}$ Stainless steel mechanism, hook, front plate and latch bolt
- ✓ Throw of the hook: 1-1/4"
- ✓ 2-3/8" backset handle
- ✓ Lock mechanism with cover plate protects against dirt penetration
- ✓ Compatible with all Europrofile cylinders
- ✓ Handles to be ordered separately
- ✓ Cover shield for handle & cylinder holes to be ordered separately



Recommended keeps







SEH P. 28

Order codes

Insert lock

H-WOOD For profiles with a min. depth of 4"

Hybrid kits: Insert lock + accessories

H-WOOD-SET-60-I- H-WOOD + 3020-HYB-A2 (2x) + 3006I-H + SHKW-ALUM + 3012-60-STD-VSZ

H-WOOD-SET-80-I- H-WOOD + 3020-HYB-A2 (2x) + 3006I-H + SHKW-ALUM + 3012-80-STD-VSZ



Optional cover shields



3020-HYB-A2 P. 86



3020-HYB-ALU P. 86



3020-HYB-STD P. 86

P. 165

Recommended hinges and handles

4DW

P. 128



3DW

P. 128





3006J-H 3006J-H

P. 164







Keeps

No lock without a keep. Locinox provides a wide range of keeps for sliding, swing, garden and child safety gates. An impact test at our facility ensures our keeps to handle every blow they receive and they meet our strict Locinox standard. Mounting is easy, fast and very strong thanks to our patented Quick-Fix system. The stop plates are adjustable and in many cases equipped with a protective rubber strip.



- 93 Keeps for swing gate locks
- 96 Keeps for child safety locks



- 98 Keeps for sliding gate locks
- 101 Keeps for insert locks








Minimal distances

Perfect work begins with a perfect preparation!

All Locinox products can be adjusted accurately. We recommend however to consider the mounting depth when planning. Below, you will find a clear overview of the minimum distances between gate and post. This guarantees that all is perfectly aligned.

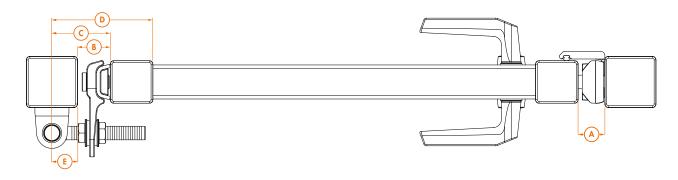

	В	C	D	E
Hinges	MINIMUM	MAXIMUM	MAXIMUM	MINIMUM
GBMU4D12	7/8"	3-1/8"	-	13/16"
GBMU4D16	1-3/8"	4-1/2"	-	1"
GBMU4D20	1-3/8"	5-1/8"	-	1"
BOLTON4D-12	1/4"	2-3/4"		1-1/8"
BOLTON4D-16	1/4"	3-1/2"		1-1/8"
GBMU-X-M12	1/4"	3″	-	13/16"
GBMU-X-M16	5/16"	3-3/4"	-	1"
GBMU-X-M18	5/16"	3-7/16"	-	1"
GBMU-X-M20	1/2"	4-3/8"	-	1"
GBMU-X-M22	1/2″	4-3/8"	-	1-3/16"
G90Z-X-M16	1-7/8"	1-3/16"	-	11/16"
G90Z-X-M20	2-1/16"	1-1/8"	-	15/16"
DINO	1/2"	1-11/16"	-	15/16"
PUMA	3/8"	13/16"	-	-
BEARING HINGE 40X40	1"	1"	-	2-3/8"
BEARING HINGE 50X50	13/16"	13/16"	-	2-1/8"
3DM	5/8"	3″	-	3/8"
4DW	0	1"	-	13/16"
3DW	0	1″	-	3/8"
GBM12X130 30X30	9/16"	-	4-11/16"	13/16"
GBM12X130 40X40	3/8"	-	4-11/16"	13/16"
GBM12X150 30X30	9/16"	-	5-1/2"	13/16"
GBM12X150 40X40	3/8"	-	5-1/2"	13/16"
GBM16X160 40X40	5/8"	-	5-7/8"	1"
GBM16X160 50X50	1/2"	-	5-7/8"	1"
GBM16X180 40X40	5/8"	-	6-5/8"	1"
GBM16X180 50X50	1/2″	-	6-5/8"	1"
GAM12X130	1-13/16"	-	4-11/16"	13/16"
GAM12X150	1-13/16"	-	5-1/2"	13/16"

	A
Keeps	MINIMUM
SAKL QF	1-3/16"
SHKL QF	1-3/16"
SMKL QF	1-3/16"
SKRZ	1-1/16"
SE & SEH	1"
SPKZ	5/16"
SSKZ	13/16"
ST	1-1/16"

	A
Keeps	MINIMUM
MODULEC-SA	1-3/16'
MODULEC-SH	1-3/16'
SHKM	9/16"
SHKW	9/16"
SHKC	1/4"
SFKI	1/2"
SFKP	1-3/16'
SFKB	1-3/16'
SFKM	1/2"

	В	C	D	E
Hinges	MINIMUM	MAXIMUM	MAXIMUM	MINIMUM
SWING130	3/8"	-	4-11/16"	13/16"
SWING150	3/8″	-	5-1/2"	13/16"
G-ORNA-M20	1-3/8"	2-7/16"	-	1-5/8"
G-ORNA-M24	1-3/8"	2-3/4"	-	1-3/4"
G-ORNA-M27	1-1/4"	3-7/16"	-	1-13/16"
G90LR-X-M16-65	2-1/16"	2-3/8"	-	11/16"
G90LR-X-M16-110	2-1/16"	4-1/8"	-	11/16"
G90LR-X-M16-150	2-1/16"	5-11/16"	-	11/16"
G90LR-X-M20-67	2-1/2"	2-3/8"	-	7/8"
G90LR-X-M20-150	2-1/2"	5-11/16"	-	7/8"
G90WP-B-M16-65	2-3/8"	2-9/16"	-	11/16"
G90WP-B-M16-110	2-3/8"	4-3/8"	-	11/16"
G90WP-B-M16-150	2-3/8"	5-7/8"	-	11/16"
G90WP-B-M20-67	3″	2-5/8"	-	7/8"
G90WP-B-M20-150	3″	5-7/8"	-	7/8"





Surface mounted electric strike

MODULEC-SA (Patent pending)

Electric Strike for surface mounted locks. Fast and easy installation thanks to the Quick-Fix. Easily interchanged with the SA keep. Can be connected to both 12V - 24V and AC/DC. Modulec-SA is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).

SHIPPING

Stop plate color options










Specifications

- ✓ Tested up to 500 000 movements
- ✓ Fast and easy fixation with Quick-Fix
- Same drilling pattern as SA, SH and SM keeps
- ✓ Easy left or right hand changing
- ♥ Corrosion-resistant: black anodized housing
- ✓ Adjustable for profiles: 1-1/2" to 2-1/2"
- ✓ Voltage: 12V-24V AC/DC
- ✓ Power: 15W



Compatible locks



Order code

MODULEC-SA-E Fail Close for surface mounted gate locks, 12-24V AC/DC

MODULEC-SA-R Fail Open for surface mounted gate locks, 12-24V AC/DC

Surface mounted electric strike with security mushroom

MODULEC-SH (Patent pending)

Replace your SHKL keep with an electrical surface mounted keep with Fail Close / Fail Open functionality. Easy to install thanks to the patented Quick-Fix. For 12V-24V and AC/DC. Modulec-SH is available in two versions: E (Emissa - Fail Close) and R (Rupture - Fail Open).

SHIPPING Stop plate color options









Specifications

- ✓ Tested up to 500 000 movements
- ✓ Fast and easy installation with Quick-Fix Same drilling pattern as SA, SH and SM keeps
- ✓ Easy left or right hand changing
- ♥ Corrosion-resistant: black anodized housing
- ✓ Adjustable for profiles: 1-1/2" to 2-1/2"
- ✓ Voltage: 12V-24V AC/DC
- ✓ Power: 15W

Ø9/16" (3x)

Compatible locks



Order code

MODULEC-SH-E Fail Close for surface mounted gate locks, 12-24V AC/DC MODULEC-SH-R Fail Open for surface mounted gate locks, 12-24V AC/DC





Electric strike for surface mounted locks


SE (Patented)

Electric strike for swing gates. Equipped with a double blocking system which will resist to up to 1000 lbs of pulling force. The deadbolt receiver has been reinforced with stainless steel, making it more robust and extremely strong. The ideal solution for your access control. SE is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).

Specifications

- ▼ Type SE.E: Emissa Fail Close
- ▼ Type SE.R: Ruptura Fail Open
- ▼ Deadbolt receiver reinforced and in stainless steel
- ✓ For profiles 2" and larger
- ✓ Voltage: 12V AC/DC

- ✓ Water resistant & weatherproof
- ✓ Pressure resistance on self-latching bolt: 1000 lbs



Compatible locks



Order codes

SE-E Electric strike, Emissa, Fail Close

SE-R Electric strike, Ruptura, Fail Open

Pull Counter Box

3006PC

Aesthetic solution in aluminum for the construction of symmetric double swing gates in combination with the Locinox keep. If used with the Locinox 4D-hinges, you can simplify your production of double gates to one single identical gate wing which can be used either on the left or right side. The pull counter box fills up the symmetric lock opening in the other gate wing.



Color options














Specifications

- Metal folded counter box to pull the gate open, designed in the same shape as the industrial lock for perfect symmetry
- ▼ To use in combination with the SA or the SH keep with the special through and through fixing



Compatible locks



P. 73

Order code

3006PC Folded counter box in aluminum with through and through fixing









Adjustable keep out of stainless steel

SAKL QF (Patented)

Stainless steel keep with polyamide finish. Used as a standard for all your gates (garden, ornamental, industrial,...) The unique Quick-Fix ensures a fast and strong installation. The adjustable, aluminum stopplate with rubber accepts different gate profiles (1-1/2)'' to 2-1/2"). Redesigned to make the latch bolt fall into the keep easier.

SHIPPING

Stop plate color options














Specifications

- Stainless steel keep with polyamide finishing
- ✓ Easy left or right hand changing
- ✓ Innovative Quick-Fix mounting
- ✓ Adjustable for profiles: 1-1/2" to 2-1/2"
- ✓ For rectangular and round profiles



Compatible locks



Order codes

SAKL QF Industrial keep for square profiles 24h SHIPPING

SARL QF Industrial keep for round profiles 24h SHIPPING

Adjustable security keep out of stainless steel

SHKL QF (Patented)

The aluminum security keep is used as a standard for industrial and chain link gates as well as any gate where higher security is desired. The patented stainless steel anchoring system prevents prying the gates open and eliminates the need to install a transom over the gate. The unique Quick-Fix bolt ensures a fast and strong installation. The adjustable stop plate with rubber bumper adjusts to gate profiles up to 2-1/2" and fits on all latch posts 1-1/2" or larger. Latch gap: 1-1/4"





Stop plate color options














Specifications

- square profiles
- for noise dampening
- ✓ Easy left or right hand changing
- ✓ Innovative Quick-Fix mounting
- Prevents opening the gate with a crowbar
- ✓ For rectangular and round profiles
- ✓ Adjustable for gate profiles: 1-1/2" to 2-1/2"



Compatible locks



Order codes

SHKL QF Industrial security keep for square profiles 24h SHRL QF Industrial security keep for round profiles 24h





Polyamide gate keep for rectangular profiles

SMKL QF

Polyamide keep for walk and garden gates. This economical gate stop and receiver is typically used in conjunction with the polyamide bodied garden gate lock LAKZ P1. The unique Quick-Fix bolt ensures a fast and strong installation. This keep is designed for gate profiles 1-1/2" and fits on all latch posts 1-1/2" or larger.

Color options












Specifications

- ✓ Keep in polyamide for square profiles
- ✓ Easy left or right hand changing
- ✓ Innovative Quick-Fix mounting
- ✓ For gate profiles 1-1/2" or more



Compatible locks



Order code

SMKL QF Polyamide garden gate keep for square profiles

Polyamide gate keep for round profiles

SKR7

Polyamide keep for walk and garden gates. This economical gate stop and receiver is typically used in conjunction with the polyamide bodied garden gate lock LAKZ P1. The U-Bolt mount ensures a fast and strong installation on round tube. This keep is designed for gate profiles 1-1/2" and latch post profiles 2-3/8" round. Latch gap: 7/8"



Color options










Specifications

- ✓ Keep in polyamide for round profiles
- ✓ Easy left or right hand changing
- ✓ Only for round posts Ø2-3/8"
- ✓ For gate profiles of 1-1/2" width



Compatible locks





SKRZ Polyamide garden gate keep for round profiles







Ornamental keep

SPKZ QF

Flat stainless steel strike plate with polyamide insert that fits into the post for a clean, finished look. This keep allows you to align your ornamental gates with a minimum latch gap in between. This strike plate does not have an integrated gate stop, so the gate can swing through. Quick-Fix bolts are provided. Latch gap: 1/4"

SHIPPING


Color options





Specifications

- ✓ Insert keep for square profiles of 1-9/16"
- ✓ Innovative Quick-Fix mounting



Compatible locks



Order code

SPKZ QF 40 Insert keep for square profiles of 1-1/2" 24h SHIPPING



Strike Plate with counter lock box

SPKZ-TK

Flat stainless steel strike plate with polyamide insert that fits into the post for a clean, finished look. This keep allows you to align your ornamental gates with a minimum latch gap in between and offers you a nice aesthetical look for double gates with the ornamental counter box opposite the lock. This strike plate does not have an integrated gate stop, so the gate can swing through. Latch gap: 1/4"


Color options





Specifications

- ✓ Counter lock box with the same shape as the ornamental lock
- ✓ For square profiles 1-1/2" min
- ✓ Mounting: through the profile into the counter-lockbox



Compatible locks



Order code

SPKZ TK 40 Insert keep and ornamental counter lock box for square profiles of 1-1/2" 24h









Sliding gate keep with Quick-Fix

SSKZ QF (Patented)


Stainless steel sliding keep for hollow posts. The keep is 5/8" auto-adjustable left/right for an easy and secure anchoring of the gate lock. A rubber stop prevents the gate from being damaged in closed position.



24h SHIPPING

Specifications

- ✓ Keep in stainless steel for square profiles
- ✓ Minimum profile size: 3" wide
- ✓ Fast and easy fixation with Quick-Fix
- The keep is 3/8" left/right auto-adjustable for easy and secure anchoring of the Twistfinger
- $\ensuremath{\mathscr{C}}$ The rubber stop prevents damaging the gateframe







Order code

SSKZ QF Sliding gate keep for square profiles with a min. width of 3" 24h SHIPPING

Aluminum adapter case for SSKZ QF for flat profiles

O-SET


Adapter for the SSKZ QF sliding gate keep. Can be used when mounting the keep on flat profiles or if you want the keep surface mounted.



24h SHIPPING

Specifications

- Aluminum case to use together with sliding gate keep SSKZ QF when installing on a flat profile
- Protects the Twistfinger when the keep is mounted on a flat profile with a minimum thickness of 1/4" and a maximum thickness of 3/4"
- ✓ Delivered with through and through fasteners



Recommended keeps







O-SET Aluminum cover box for catch bolt protection 24h





Keep for square profiles for TWIST40

STK QF (Patented)


This polyamide keep conforms to the European swimming pool standard NF P90-306. It is designed to work with the TWIST40 swimming pool lock. Fast and strong installation on square posts using our patented Quick-Fix bolts. For gate profiles 1-1/2" only. Latch gap: 1-1/4"

Color options



Specifications

- ✓ Keep in polyamide for square profiles 1-1/2" or larger
- ✓ For 1-1/2" gate profiles only
- $\operatorname{\oomega}$ Only compatible with the swimming pool lock TWIST40
- ✓ Innovative Quick-Fix mounting
- We strongly advise you to read the swimming pool standard NF P90-306 before manufacturing any swimming pool gate



Compatible lock



TWIST40 P. 74

Order code

STK QF Keep for TWIST40 pool lock, Fits min 1-1/2" square profiles

Keep for round profiles for TWIST40



This polyamide keep conforms to the European swimming pool standard NF P90-306. It is designed to work with the Twist40 swimming pool lock. Fast and strong installation on 2-3/8" diameter round tubes using our patented Quick-Fix mounting hardware. For gate profiles 1-1/2" only. Latch gap: 1-1/4"




Color options



Specifications

- ✓ Keep in polyamide for round profiles Ø2-3/8"
- ✓ For 1-1/2" gate profiles only
- ✓ Only compatible with the swimming pool lock TWIST40
- ✓ Innovative Quick-Fix mounting
- We strongly advise you to read the swimming pool standard NF P90-306 before manufacturing any swimming pool gate



Compatible lock



TWIST40 P. 74

Order code

STR60 QF Keep for TWIST40 pool lock, Fits 2-1/2" round latch posts only





Keeps for mortise locks




Specifications

- ▼ Type SEH.E: Emissa Fail Close
- ▼ Type SEH.R: Ruptura Fail Open
- ✓ Easy left or right hand changing
- ✓ For profiles 2" and larger
- ✓ Voltage: 12V AC/DC
- Current Emissa: 1ACurrent Ruptura: 1.5A
- ✓ Water resistant & weatherproof
- Ø Pressure resistance on self-latching bolt: 1000 lbs

Electric strike for mortise locks

SEH (Patented)

Electric strike for swing gates using our Hybrid Mortise locks. The strike is equipped with a double blocking system which supports 1000 lb pulling force. This keep is extremely strong and the ideal solution for your access control installations. The electric strike is available in a Fail Secure or Fail Safe model. Latch gap: 1". SEH is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).



Compatible locks



Order codes

SEH-E Electric strike, Emissa, Fail Close for H-Metal and H-Wood

SEH-R Electric strike, Ruptura, Fail Open for H-Metal and H-Wood

Hybrid keep for insert locks

SHKM (Patented)

Aluminum keep for Hybrid mortise locks. This unique keep combined with the Hybrid lock ensures a strong anchoring. With Quick-Fix for metal and aluminum posts.






Stop plate color options





Specifications

- ✓ Adjustable for profiles: 1-1/2" to 2-1/2"
- ✓ Innovative Quick-Fix mounting
- Anchoring plate for hook
- ✓ Easy left or right hand changing



Compatible lock and accessories

P. 83



P. 84

Order code

SHKM For square posts in combination with H-METAL lock SHIPPING





P. 102



Weldable lock box with keep/stop for Mortise lock


HWKB

Hybrid keep for Hybrid mortise lock. The welding box in black steel 2-3/8" x 1-9/16", 1/16" thick can be welded into the latch post. The strike plate in stainless steel with integrated stop ensures a finished look and smooth locking. Latch gap: 1/4"

SHIPPING

Specifications

- ✓ Weld box for Hybrid Keep in black steel to weld into the latch post. $2-3/8" \times 1-9/16"$, 1/16"
- ✓ Front plate in stainless steel
- ✓ Integrated gate stop with 2 rubber stoppers
- ✓ For gate profiles of 1-1/2" width



Compatible locks



Order code

HWKB Keep & welding box for hybrid mortise lock 24h




Gate frame/post profile for Mortise keep

Fully prepared steel profile for Mortise keep. Especially useful for double leaf gates, use this as your gate upright and ensure a perfect and simple installation of the keep without having to do the cut-outs yourself, saving time and money on every gate.



Specifications

- ✓ Profile cut-out for Hybrid Keep: SHKM
- ✓ Length: 78-3/4"
- ▼ Fully prepared gate ends simplify building your gates



Recommended keeps



SHKM

P. 101

Order code

HKT Mild steel welding tube, 78" long, for SHKM Keep








Stainless steel keep for H-COMPACT

SHKC

Stainless steel keep for the H-COMPACT insert lock. The 1-9/32" throw of the hook and the anti-lift protection provide a secure anchoring. Latch gap: 3/8"

Specifications

- Plastic box prevents intrusion of dirt or water in the profile
- √ 15/64" thick front plate
- ✓ Can be used for swing and slide gates
- ✓ Innovative installation with Quick-Fix
- The strike presents a safe solution and prevents lifting the gate out of position.



Compatible lock



H-COMPACT

P. 87

Order code

SHKC For square posts with a min. width of 1-1/2" in combination with H-COMPACT lock



Hybrid keep for wood

SHKW

Aluminum keep for our Hybrid Mortise locks. This unique keep is left and right hand reversible and comes with an adjustable stop plate that fits 1-1/2" to 2-1/2" gate profiles. When used in combination with the Hybrid lock this keep ensures strong gate locking while preventing the gate from being pried open as the dead bolt's "hook" locks into the keep's anchoring plate. This model comes with wood screws for installation on wooden posts. Latch gap:

7/8"


Color options





Specifications

- ✓ With mounting screws for wood
- Supplied with stop plate if integrated stop is not provided
- ✓ For 1-1/2" to 2-1/2" gate profiles
- ✓ Anchoring plate for hook



Compatible lock



Order code

SHKW For wooden posts in combination with H-WOOD lock







Surface mounted stainless steel keep strike for Fortylock, Fiftylock and Sixtylock


SFKB

Stainless steel keep with polyamide finishing for all your metal, aluminum and PVC gates. The patented stainless steel anchoring system prevents pulling the gates out of the keep. The unique Quick-Fix ensures a fast and strong mounting.

24h SHIPPING

Specifications

- ✓ Keep for square profiles
- ✓ Aluminum slam plate with shock rubber
- ✓ Innovative installation with Quick-Fix
- ▼ To combine with Fortylock, Fiftylock and Sixtylock
- ✓ Easy left or right hand changing
- ✓ Prevents opening the gate with a crowbar











FORTYLOCK

FIFTYLOCK P. 81

SIXTYLOCK P. 82

Order code

SFKB-QF For profiles 1-1/2" to 2-1/2"


Insert stainless steel strike for Fortylock, Fiftylock and Sixtylock SFKI

Insert keep for small gates in metal, aluminum and PVC. The keep can be combined with the Fortylock, Fiftylock and Sixtylock. Fast and easy mounting with Quick-Fix. Hook of Fortylock in combination with the keep provides a secure anchoring of gate and post. Available for square posts of 1-3/16" or 1-1/2".



Specifications

- ✓ Innovative installation with Quick-Fix
- ✓ Easy left or right hand changing
- ✓ Insert depth: 9/16"

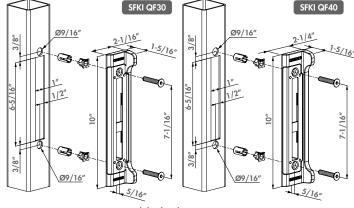

Compatible locks







FORTYLOCK P. 80

FIFTYLOCK

SIXTYLOCK P. 82

/8"





SFKI-QF30 For square gate profiles 1-1/8" x 1-1/8"

SFKI-QF40 For square gate profiles 1-1/2" x 1-1/2" 24h




Polyamide keep for Fortylock, Fiftylock and Sixtylock

SFKP

Polyamide keep for walk- and garden gates. To combine with Fortylock, Fiftylock and Sixtylock. The Quick-Fix ensures a fast and strong mounting on square posts. For gate profiles 1-1/2".

Specifications

- ✓ Keep for square profiles of 1-9/16"
- ✓ Innovative installation with Quick-Fix
- ✓ Easy left or right hand changing











FORTYLOCK P. 80

FIFTYLOCK P. 81

SIXTYLOCK P. 82

Order code

SFKP-QF40 For square gate profiles 1-1/2" x 1-1/2"

NEW

Stainless steel surface mounted keep for Fortylock, Fiftylock and Sixtylock

SFKM


Aesthetical surface mounted keep for small metal, aluminum and PVC gates. Specially designed for Fortylock, Fiftylock and Sixtylock insert locks. The limited 5/16" depth ensures a discreet look. A highly efficient assembly with minimal gate preparations is guaranteed, while the unique Quick-Fix ensures a fast and strong fixation on the gate. This unique keep in combination with the insert lock ensures a strong gate anchoring.



Specifications 5H

- ✓ Stainless steel keep for square profiles as of 1-9/16"

- ✓ Including innovative Quick-Fix fixations and self drilling screws
- ✓ Elegant design: visible thickness of 5/16"
- Adjustable guide to avoid damage of day bolt to post



Compatible locks







FORTYLOCK P. 80

FIFTYLOCK P. 81

SIXTYLOCK P. 82



SFKM-QF Stainless steel surface mounted keep for Fortylock, Fiftylock and Sixtylock





Hinges

Hinges

Hinges support the weight of the gate and ensure it to open & close smoothly. Because of this heavy task, our hinges are hot-dip galvanized or made of stainless steel. Thanks to our wide range we can offer a solution for every situation. Top of the line is the patented 4D hinge. This hinge is adjustable in 4 dimensions (height/depth/alignment/left or right turning).



109 Hinges for industrial and ornamental gates

130 Hinges for small gates







Weatherproof

Materials and surface treatments fit for a long, care-free outdoor use, is a basic requirement for our products. Therefore, Locinox only uses stainless steel and non-ferro metals as raw material. For the surface treatment we choose for hot-dip galvanization or chroming, if possible. Our aluminum lock box are profoundly tested against wear by salt and never fail thanks to the applied multilayer, high performing coatings.







POWDER COATING

HOT-DIP GALVANIZATION




Even though our products meet most important safety standards, a wrongful assembly could result in hazardous situations. Therefore we like to inform you about the parameters to mind during assembly.

CORRECT INFORMATION

A team of engineers and experienced product experts are ready to assist you. Every product is supplied with a clear manual which guides you through the steps for a correct and safe installation. For more complex products, a 3D installation video is available on our website.

MAXIMUM GATE WEIGHT

We always mention the maximum gate weight which is allowed for our hinges. This weight is still under the maximum load. Locinox applies a safety factor 5 which means that they can bear up to 5 times the maximally allowed gate weight without endangering safety. The maximum gate weight and the safety factor are only applicable for gates that comply with the following formula.









180° Bolt-on 4D adjustable hinge

BOLTON4D- (Patent pending)



180° hinge that can quickly be mounted without any welding being required. It also offers all advantages of the GBMU4D range: vandal-proof, adjustment of height, depth and distance between gate and post; and left/right interchangeable so it can be used for both left and right handed gates. BOLTON4D is available in M12 and M16, and always in 2 versions: one with Quick-Fix on both sides and one with Quick-Fix on the post, and on gate side a bolt through fixing for gate frames from 1.6" to 2.4".

Color options









Specifications

- ✓ Vandal-proof eyebolt & crossbolt
- ⊗ Bolton-U and Bolton-G in extruded aluminum

Hinge parts










BOLTON-U-**BOLTON-G-**P. 110 P. 110

1034HDGA-P. 114

Order codes & Dimensions	LBS
BOLTON4D-12-QF-90	220 lbs
BOLTON4D-12-4060-90	220 lbs
BOLTON4D-16-QF-110	440 lbs
BOLTON4D-16-4060-110	440 lbs



Α	В	С	D	E	F	G
Quick-Fix		M12	3-9/16"	2-3/4"	1-5/8"	1-3/8"
	Bolt through fixing	M12	3-9/16"	2-3/4"	1-5/8"	1-3/8"
Quick-Fix		M16	4-3/8"	3-3/8"	2"	1-7/8"
	Bolt through fixing	M16	4-3/8"	3-3/8"	2"	1-7/8"







Bolt-on U-shaped earplate with Quick-Fix

BOLTON-U-

Fix easily and firmly the U-shaped earplate to the fix post with 2 Quick-Fix. Compatible with GBMU 16 / GBMU 4D 16 / BOLTON4D-16.










Specifications

- ✓ U-shaped earplate in aluminum
- ✓ Perfect combination with BOLTON-G-16-QF
- ✓ No welding required: drill holes and fix with Quick-Fix



Order code

BOLTON-U-16-QF

U-shaped earplate with Quick-Fix



Bolt-on GRIP with Quick-Fix or internal threaded bushing fastening

BOLTON-G- (Patent pending)

The GRIP can quickly and easily be firmly attached to the fixed post with 2 Quick-Fix attachments elements or with or internal threaded bushing fastening. Compatible with GBMU 16 / GBMU 4D 16 / BOLTON4D 16.

Color options










Specifications

- ✓ GRIP in aluminum
- ▼ No welding required: drill holes and fix with Quick-Fix
- \checkmark The 40-60 version can be applied to tubes of 1-1/5" to 2-1/2"



Order codes

BOLTON-G-16-QF

BOLTON-G-16-4060

A B

Bolt through fixing









Gate wing standardization

With Locinox you can easily standardize and stock only one type of gate wing which can be used on left- or right turning gates or on double wing gates. The extensive standardization of our products allows you to use the same wing for the lock and the keep. A counterbox ensures a uniform and aesthetic look. The orientation of the GRIP of our GBMU4D hinge makes it possible to determine during installation whether the wing will be used for left or right turning.



100% modular

Easy to stack



Time-saving



1 gate profile, lots of possibilities



Left/right reversible



Only 1 drill pattern

Advantages of wing standardization:

Easy to stack and transport

A gate wing where the hardware such as hinges and locks can be installed afterwards. Easier to stack, keep on stock and easier to transport!





Hinge, lock and keep reversibility

A gate wing can be used for left- or right turning. Locinox locks and keeps are reversible and the hinges can be installed in both directions.







Right turning gate:



Left turning gate:



Double wing gate:







180° weld-on 4D adjustable hinge

GBMU4D12 (Patented)

4-way adjustable, hot-dip galvanized 180° hinge. Depth and spacing between gate and post are adjustable after installation. No more left or right swinging gates in stock. Only one gate wing should be produced for both left and right turning gates. The welding parts are available in black steel or zinc plated.

Specifications

- ✓ 180° opening and closing angle
- ✓ Hot-dip galvanized eyebolt and Grip

Hinge parts







KLAUW12 P. 116



GRIP12 P. 118



4DFIX-I-12 P. 117

Order codes & Dimensions

Welding parts in black steel (B)

GBMU4D12-B-90

Welding parts zinc plated (Z)

GBMU4D12-Z-90







180° weld-on 4D adjustable hinge

GBMU4D16 (Patented)

4-way adjustable, hot-dip galvanized 180° hinge. Depth and spacing between gate and post are adjustable after installation. Only one gate wing should be produced for both left and right turning gates. The welding parts are available in black steel or zinc plated.

Grip color options













Specifications

- ✓ 180° opening and closing angle
- ✓ Hot-dip galvanized eyebolt and Grip

Hinge parts



P. 116










GRIP16 P. 118

4DFIX-I P. 117

Order codes & Dimensions

P 117

Welding parts in black steel (B)	Welding parts zinc plated (Z)	LBS
GBMU4D16-B-110 24h SHIPPING	GBMU4D16-Z-110	440 lbs
GBMU4D16-B-150	GBMU4D16-Z-150	440 lbs









4-way adjustable 180° hinge

GBMU4D20 (Patented)

4-way adjustable, hot-dip galvanized 180° hinge. Depth and spacing between gate and post are adjustable after installation. No more left or right swinging gates in stock. Only one gate wing should be produced for both left and right turning gates. The welding parts are available in black steel or zinc plated.



Grip color options











Specifications

- ✓ 180° opening and closing angle
- ✓ Hot-dip galvanized eyebolt and Grip

Hinge parts







P. 117



Welding parts zinc plated (Z)

GRIP20 P. 118




P. 117



Order codes & Dimensions

Welding parts in black steel (B)





Eyebolt M20	Length 5-1/8"	4-1/8"
Eyebolt M20	Length 5-7/8"	4-1/2"



4-way adjustable vandal-proof 180° hinge

880 lbs

880 lbs

GBMU4DSHIELD (Patented)

Vandal-proof hot dip galvanized 180° hinge. This secured version of the GBMU4D16 hinge provides extra security since the eyebolt or cross bolt can not be tampered with. With the 4-way adjustability you no longer have to keep left or right turning gates in stock. Height, depth, left and right alignment and turning direction are individually adjustable.

Specifications

- ✓ 180° opening and closing angle
- ✓ Hot-dip galvanized eyebolt and Grip
- ✓ Vandal-proof Grip-shield included

Compatible hinge parts



1001U

P. 116









KLAUW-GRIP16 P. 117 P. 118

4DFIX-I P. 117

Order codes & Dimensions










Specifications

- ✓ Vandal-proof eyebolt & crossbolt

180° 3-way adjustable hinge

GBMU (Patented)

3-way adjustable hot-dip galvanized 180° hinge. Depth and spacing between gate and post are adjustable after installation. The welding parts are available in black steel or zinc plated.



Order codes

Welding parts in black steel (B)	Welding parts zinc plated (Z)	LBS
GBMU-B-M12-90	GBMU-Z-M12-90	220 lbs
GBMU-B-M16-110 24h SHIPPING	GBMU-Z-M16-110	440 lbs
GBMU-B-M16-150	GBMU-Z-M16-150	440 lbs
GBMU-B-M18-105	GBMU-Z-M18-105	550 lbs
GBMU-B-M18-150	GBMU-Z-M18-150	550 lbs
GBMU-B-M20-130	GBMU-Z-M20-130	880 lbs
GBMU-B-M20-150	GBMU-Z-M20-150	880 lbs
GBMU-B-M22-145	GBMU-Z-M22-145	970 lbs
GBMU-B-M22-160	GBMU-Z-M22-160	970 lbs

A	В	C	D	E	F	G	н	1	J	K
M12	3-1/2"	2-3/4"	1-3/8"	1"	1-1/4"	3-1/2"	1-3/8"	1/2"	1/4"	1-7/8"
M16	4-3/8"	3-3/8"	1-5/8"	1-1/8"	1-5/8"	4-3/8"	1-3/4"	5/8"	5/16"	2-3/8"
M16	5-7/8"	4-7/8"	1-5/8"	1-1/8"	1-5/8"	4-3/8"	1-3/4"	5/8"	5/16"	2-3/8"
M18	4-1/8"	3-1/8"	2"	1-1/8"	1-5/8"	4-3/4"	2"	3/4"	5/16"	2-1/2"
M18	5-7/8"	4-7/8"	2"	1-1/8"	1-5/8"	4-3/4"	2"	3/4"	5/16"	2-1/2"
M20	5-1/8"	4-1/8"	2-3/8"	1-3/8"	2"	5-1/8"	2-3/8"	13/16"	1/2"	2-13/16"
M20	5-7/8"	4-1/2"	2-3/8"	1-3/8"	2"	5-1/8"	2-3/8"	13/16"	1/2"	2-13/16"
M22	5-3/4"	4-1/2"	2-3/8"	1-3/8"	2"	5-1/8"	2-3/8"	15/16"	1/2"	2-7/8
M22	6-1/4"	5-1/8"	2-3/8"	1-3/8"	2"	5-1/8"	2-3/8"	15/16"	1/2"	2-7/8"




Hot-dip galvanized eyebolt set

1034HDGA- (Patented)

Eyebolt set hot dip galvanized. Vandal-proof.

Specifications

- ✓ Hot-dip galvanized bearing eyebolt, transverse bolt and screws
- ✓ Stainless steel ring (6 x DIN 125A)
- ✓ Vandal-proof



01401 00400	
1034HDGA-M12-90	
1034HDGA-M16-110	
1034HDGA-M16-150	
1034HDGA-M18-105	
1034HDGA-M18-150	
1034HDGA-M20-130	
1034HDGA-M20-150	
1034HDGA-M22-145	
1034HDGA-M22-160	

A	В	C	D	E	F	G
M 12	Length 3-9/16"	2-3/4"	9/16"	15/16"	Ø1/2"	1-7/8"
M16	Length 4-5/16"	3-3/8"	3/4"	1-1/4"	Ø9/16"	2-3/8"
M16	Length 5-15/16"	4-15/16"	3/4"	1-1/4"	Ø9/16"	2-3/8"
M 18	Length 4-1/8"	3-1/8"	13/16"	1-7/16"	Ø5/8"	2-7/16"
M 18	Length 5-15/16"	4-15/16"	13/16"	1-7/16"	Ø5/8"	2-7/16"
M20	Length 5-1/8"	4-1/8"	7/8"	1-9/16"	Ø3/4"	2-13/16"
M20	Length 5-15/16"	4-1/2"	7/8"	1-9/16"	Ø3/4"	2-13/16"
M22	Length 5-11 / 16"	4-1/2"	15/16"	1-5/8"	Ø13/16"	2-15/16"
M22	Length 6-5/16"	5-1/8"	15/16"	1-5/8"	Ø13/16"	2-15/16"






Corrosion-resistant and vandal-proof eyebolt set 1034A2-

Corrosion-resistant and vandal-proof eyebolt set in stainless steel.


Specifications

- M 16 Eyebolt set in stainless steel, including: eyebolt, cross bolt, nuts and washers
- ✓ Vandal-proof



Order code

1034A2-M16-110-50






1034ROLL-HDG-

The bearing eyebolt can be integrated in any Locinox GBMU M16 and M20 hinge. The eyebolt ensures a smooth opening and closing and is perfect in combination with Locinox gate closers. It has a stainless steel anti-theft crossbolt.

Specifications

- ✓ Use with Locinox gate closers recommended
- ✓ Stainless steel ring (6 x DIN 125A)
- ✓ Dual sealed stainless steel bearings
- ✓ Vandal-proof

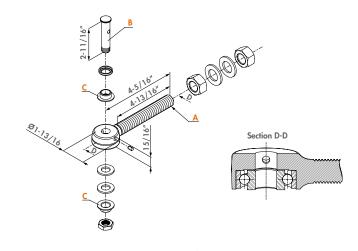

Order codes

1034ROLL-HDG-M16

1034ROLL-HDG-M20






U-shaped ear plate in black steel

1001 U

U-shaped ear plate in black steel for 180° hinges

Specifications

 ✓ U-shaped ear plate to weld on in black steel or zinc plated



Order codes

Black steel (B)	Zinc plated (Z)	
1001 U-B-12	1001 U-Z-12	
1001 U-B-16	1001 U-Z-16	
1001 U-B-18	1001 U-Z-18	
1001U-B-20	1001U-Z-20	
1001U-B-22	1001U-Z-22	

Α	В	С	D	Е
1-3/8'	1-1/4"	15/16"	Ø1/2"	3/16"
1-9/16"	1-5/8"	1-3/16"	Ø9/16"	1/4"
1-9/16"	1-5/8"	1-3/16"	Ø11/16"	1/4"
2-3/8"	2"	1-3/8"	Ø3/4"	5/16"
2-3/8"	2"	1-3/8"	Ø13/16"	5/16"




Groove plate in black steel

1002M

Groove plate in black steel for 180° hinges

Specifications

✓ Black steel or zinc plated groove plate to weld on



Order codes

Zinc plated (Z)	Black steel (B)
1002M-Z-12	1002M-B-12
1002M-Z-16	1002M-B-16
1002M-Z-18	1002M-B-18
1002M-Z-20	1002M-B-20
1002M-Z-22	1002M-B-22


Α	В	C	D
3-9/16"	1-3/8"	1/4"	1/2"
4-5/16"	1-3/4"	5/16"	11/16"
4-3/4"	2"	5/16"	3/4"
5-1/8"	2-3/8"	1/2"	13/16"
5-1/8"	2-3/8"	1/2"	15/16"

Gate claw (Special Order Only)

KLAUW 12

Black steel or zinc plated gate claw to weld on. Compatible with GBMU4DSHIELD-12.

Specifications



Order codes

KLAUW12-B	KLAUW12-Z
Black steel (B)	Zinc plated (Z)

Compatible with GRIP12 & 4DFIX-I-13






Gate Claw

KLAUW-

Black steel or zinc plated welding part for a precise, strong and aesthetic connection to (min.) 1-9/16" profiles. Compatible with GBMU4D16, GBMU4D20 and Bearing Hinge.

Specifications



Order codes

Black steel (B) Zinc plated (Z)

KLAUW-B KLAUW-Z

Compatible with GRIP16, GRIP20 & 4DFIX-I




Claw nut and bolts for 4D hinges

4DFIX-I-12

Hot-dip galvanized claw nut with stainless steel M10 bolts. Part of the GBMU4D12 hinge.

Specifications

- ✓ Claw nut hot-dip galvanized
- ✓ 2 stainless steel bolts M10 x 13/16"
- ✓ Component of the GBMU4DSHIELD 12 hinge



Order code

4DFIX-I-12

Bolts: M10x13/16" (2x)




Claw nut and bolts for 4D hinges (Special Order Only)

4DFIX-I

Hot-dip galvanized claw nut with stainless steel M16 bolts. Part of the GBMU4D16 and 20 hinge.

Specifications

- extstyle 2 bolts M16 x 1-1/4" in stainless steel



Order code

4DFIX-I

Bolts: M16 x 1-1/4" (2x)







Fixation grip for hinge GBMU4D12

GRIP12


Fixation grip for hinge GBMU4D12

Color options



Specifications

✓ Hot-dip galvanized steel



Order code

GRIP12

Compatible eyebolt-set: 1034HDGA-M12-90



Fixation Grip for hinge GBMU4D16 (Special Order Only)

GRIP 16

Fixation Grip for hinge GBMU4D16 (Special Order Only)

Color options














Specifications

- ✓ Hot-dip galvanized steel



Order code

GRIP16

Compatible eyebolt set: 1034HDGA-M16 or 1034ROLL-M16



Fixation Grip for hinge GBMU4D20 (Special Order Only)

GRIP20

Fixation Grip for hinge GBMU4D20 (Special Order Only)

Color options














Specifications

- ✓ Hot-dip galvanized steel



Order code

GRIP20

Compatible eyebolt set: 1034HDGA-M20





90° adjustable hinge

G90Z (Patented)



Hot-dip galvanized 90° hinge. The perfect solution for all your small industrial gates.

Specifications

- ✓ Nut in black steel for welding
- ✓ Vandal-proof

Hinge parts



P. 121





P. 121

P. 121

Order codes

Welding parts in black steel (B)	Welding parts zinc plated (Z)	LBS
G90Z-B-M16-65	G90Z-Z-M16-65	330 lbs
G90Z-B-M16-110	G90Z-Z-M16-110	330 lbs
G90Z-B-M16-150	G90Z-Z-M16-150	330 lbs
G90Z-B-M20-67	G90Z-Z-M20-67	660 lbs
G90Z-B-M20-150	G90Z-Z-M20-150	660 lbs

_A	В	С	D	E
M16	2-1/2"	1-7/8"	Ø7/8"	Ø1"
M16	3-5/16"	3-5/8"	Ø7/8"	Ø1"
M16	5-7/8"	5-2/8"	Ø7/8"	Ø1"
M20	2-5/8"	1-3/4"	Ø1"	Ø1-1/8"
M20	5-7/8"	5"	Ø1"	Ø1-1/8"

3/16" 13/16"



Vandal-proof one way 90° hinge with adjustable welding nut

G90LR (Patented)

Vandal-proof hot-dip galvanized 90° hinge. This hinge is the perfect solution for all your small industrial gates. The eyebolt can not be tampered with when the gate is closed. With the LR welding nut you can easily adjust the hinge.

Specifications

- ✓ Vandal-proof

Hinge parts



1036-Z

P. 121




P. 121





LR P. 123

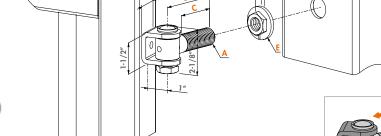

Welding parts zinc plated (Z)	LBS
G90LR-Z-M16-65	330 lbs
G90LR-Z-M16-110	330 lbs
G90LR-Z-M16-150	330 lbs
G90LR-Z-M20-67	660 lbs
G00LB 7 M20 150	440 lb-

Α	В	С	D	E	F	G
M16	Length 2-9/16"	1-7/8"	Ø1"	Ø1-1/2"	3/8"	9/16"
M16	Length 4-5/16"	3-5/8"	Ø1"	Ø1-1/2"	3/8"	9/16"
M16	Length 5-15/16"	5-3/16"	Ø1"	Ø1-1/2"	3/8"	9/16"
M20	Length 2-5/8"	1-3/4"	Ø1-1/4"	Ø1-13/16"	7/16"	11/16"
M20	Length 5-15 / 16"	5-1 / 16"	Ø1-1/4"	Ø1-13/16"	7/16"	11 / 16"







G90WP (Patented)

Vandal-proof hot-dip galvanized 90° hinge. This secured hinge is the perfect solution

Vandal-proof one way 90° hinge with adjustable steel wall plate

for all your small and medium-sized gates. The eyebolt can not be tampered with when the gate is closed. Thanks to the wall plate with adjustable nut you can easily adjust the hinge.

Ø1/2"

Specifications

- ✓ Wall plate with adjustable nut
- ✓ Vandal-proof

Order codes

G90WP-B-M16-65 G90WP-B-M16-110

G90WP-B-M16-150

G90WP-B-M20-67

G90WP-B-M20-150

Welding parts in black steel (B)



P. 124

Hinge parts 1036-B 1005WP P. 121 P. 121

Α	В	C	D
M16	Length 2-9/16"	1-7/8"	3/4"
M16	Length 4-5/16"	3-5/8"	3/4"
M16	Length 5-15/16"	5-3/16"	3/4"
M20	Length 2-5/8"	1-3/4"	13/16"
M20	Length 5-15/16"	5-1/16"	13/16"



330 lbs

330 lbs

330 lbs

660 lbs

660 lbs








Earplate for eyebolt 1039SET (Special Order Only)

1036

Earplate for hinge 1039SET

Specifications

- ⋖ U-shaped ear plate to weld on in black steel or zinc plated
- ✓ Compatible with hinge 1039SET-M 16 and M20



Order codes

Black steel (B)	Zinc plated (Z)	A
1036-B	1036-Z	For crossbolt Ø9/16"




Weld nut (Special Order Only)

1127

M16 or M20 weld nut

Specifications

- ✓ Compatible with hinge 1039SET



Order codes

For eyebolt	Α	В	C	D
1127-M16	Ø1"	Ø13/16"	3/16"	13/16"
1127-M20	Ø1-3/16"	Ø1"	3/16"	13/16"




Eyebolt set for earplate 1036

1039SET (Patented)

Eyebolt set for earplate 1036

Specifications



Hot-dip galvanized eyebolt set	A	В	C	D
1039SET-M16-65	M16	Length 2-9/16"	1-7/8"	15/16"
1039SET-M16-110	M16	Length 4-5/16"	3-5/8"	15/16"
1039SET-M16-150	M16	Length 5-15/16"	5-3/16"	15/16"
1039SET-M20-67	M20	Length 2-5/8"	1-3/4"	1-1/16"
1039SET-M20-150	M20	Length 5-15/16"	5-1/16"	1-1/16"



Ornamental hinge set

G-ORNA-LR



Hot-dip galvanized hinge set including grease fitting and adjustable nut for ornamental

Specifications

- ♥ Ornamental hinge set
- ✓ Black steel or zinc plated welding base
- ✓ Zinc plated adjustable nut
- ✓ Hot-dip galvanized clamp hinge with stainless steel bolt

Hinge parts



1002B

P. 123





1004ORNA P. 123

LR P. 123

Order codes

Welding block in black steel (B)	Welding block zinc plated (Z)	LBS
G-ORNA-LR-B-M20	G-ORNA-LR-Z-M20	660 lbs
G-ORNA-LR-B-M24	G-ORNA-LR-Z-M24	880 lbs
G-ORNA-LR-B-M27	G-ORNA-LR-Z-M27	1100 lbs

Α	В	С	D	Е	F	G
M20	Length 1-9/16"	Welding base 1-3/8"	1-1/8"	2-1/16"	Ø1-1/4"	Ø1-13/16"
M24	Length 1-3/4"	Welding base 1-9/16"	1-5/16"	2-1/4"	Ø1-3/8"	Ø2"
M27	Length 2-3/8"	Welding base 2"	1-9/16"	2-7/16"	Ø1-1/2"	Ø2-1/16"




Ornamental hinge set with wall plate


G-ORNA-WP

Hot-dip galvanized hinge set including greaser and wall plate with adjustable nut for ornamental gates.

Specifications

- ✓ Black steel or zinc plated welding base
- ✓ Hot-dip galvanized wall plate
- ✓ Hot-dip galvanized clamp hinge with stainless steel bolt
- Welding base 1-3/8" x 1-3/8", M20 clamp hinge





Hinge parts







1002B P. 123

1004ORNA P. 123

P. 124

Order codes

Welding block in black steel (B) G-ORNA-WP-B-M20

Welding block zinc plated (Z) G-ORNA-WP-Z-M20









Clamp hinge


10040RNA



Hot-dip galvanized clamp hinge.

Specifications

✓ Hot-dip galvanized clamp hinge with stainless steel bolt



Order codes

1004ORNA-M20
1004ORNA-M24
1004ORNA-M27


_A	В	С	D	E	F	G
M20	Length 1-9/16"	3-3/16"	1-1/8"	1/4"	Ø1-3/16"	2-3/16"
M24	Length 1-3/4"	3-1/2"	1-5/16"	1/4"	Ø1-3/8"	2-3/8"
M27	Length 2-9/16"	4-3/16"	1-9/16"	1/4"	Ø1-9/16"	2-9/16"

Welding block for ornamental hinge

1002B

Black steel or zinc plated welding bloc for ornamental clamp hinges.

Specifications



Order codes

Black steel (B)	Zinc plated (Z)	
1002B-B-35	1002B-Z-35	
1002B-B-40	1002B-Z-40	
1002B-B-50	1002B-Z-50	


A	В		ע
2-1/16"	1-1/4"	1-3/8"	Ø1-3/16"
2-1/4"	1-7/16"	1-9/16"	Ø1-3/8"
2-7/16"	1-5/8"	2"	Ø1-9/16"

Adjustable nut (Special Order Only)



Zinc-plated adjustable welding nut for ornamental gates. With this system you can finetune your ornamental gate.

Specifications



LR-M16	Ø1-1/2	2" 5/8"	7/16"
LR-M20	Ø1-13/	16" 11/16"	7/16"
LR-M24	Ø2"	11 / 16"	7/16"
LR-M27	Ø2-1/1	6" 11/16"	7/16"




Wall plate hot-dip galvanized

1005WP



Hot-dip galvanized wall plate with adjustable nut for garden gate hinges.

Specifications



Order codes

Order codes	_ A	В	С	D	Е	F
1005WP-M12	M12	2-3/8"	9/16"	1/8"	3/16"	Ø1/4"
1005WP-M16	M16	3-15/16"	3/4"	3/16"	3/16"	Ø7/16"
1005WP-M20	M20	3-15/16"	13/16"	3/16"	3/16"	Ø7/16"




Flower wall plate hot-dip galvanized (Special Order Only)

1005WPF

 $\label{thm:local_potential} \mbox{Hot-dip galvanized wall plate with adjustable nut for ornamental gates.}$

Specifications



Order codes

1005WPF-M20	M20	4-5/16"	3/4"	2-3/8"	3/16"	Ø7/16"
1005WPF-M22	M22	4-3/4"	13/16"	2-9/16"	3/16"	Ø7/16"
1005WPF-M24	M24	5-1/8"	13/16"	2-3/4"	3/16"	Ø7/16"
1005WPF-M27	M27	5-1/8"	13/16"	2-3/4"	3/16"	Ø7/16"




Hot-dip galvanized steel wall plate

1005WPU16

Hot-dip galvanized wall plate with U-shaped ear for M16 eyebolt with M14 bolt.

Specifications

- ightharpoonup For M 16 eyebolt and M 14 bolt



Order code

1005WPU16

Compatible eyebolt set: 1034HDGA-M16 or 1034ROLL-M16






Gate pivot

GDP

Black steel or zinc-plated gate pivot point for ornamental gates.

Specifications

✓ Packed per 10 pieces



Order codes

Black steel (B)	Zinc plated (Z)	A
GDP-B-35	GDP-Z-35	Ø1-1/8"
GDP-B-40	GDP-Z-40	Ø1-5/16"
GDP-B-50	GDP-Z-50	Ø1-3/4"




Base plate and plate holder for gate pivot frame

GP-U-BASE

The combination of the plate holder and the base plate makes it possible to adjust the distance between the post and the gate. The hot-dip galvanized base plate suits the gate pivot frame GDP-B-35, GDP-B-40, and GDP-B-50 so you only need to keep 1 single product in stock.

Specifications

- ✓ Distance beween post and gate 1-3/8" adjustable



Order code

GP-U-BASE

Compatible with all gate pivots







180° double bearing hinge

DINO

The Dino hinge is a double bearing hinge in an aluminum housing. The stainless steel bearings guarantee a smooth opening and closing of the gate. Easy to install with Quick-

A(4x)

Color options





Specifications

- Aesthetic design & powder coated aluminum housing
- ✓ Mounting Hardware: Anti-theft & vandal-proof
- ✓ Fast and easy fixation with Quick-Fix

Compatible gate closer



MAMMOTH-180

P. 15

Order code

DINO







″91/6-1/




90° 2-Way adjustable bearing hinge


BEARING HINGE

Stainless steel maintenance free bearing hinge for mounting on all your automated gate projects. The hinge is adjustable in height and width.

Specifications

- ✓ Rust resistant housing
- ✓ Maintenance free sealed bearing
- ✓ Can be used as top & bottom hinge





Hinge part



KLAUW-

P. 117

Order code

BEARING HINGE



Gate frame 1-9/16" x 1-9/16" 2" x 2"





90° 2-Way adjustable bearing hinge

1DBH-




Zinc plated maintenance free bearing hinge for mounting on all your automated gate projects. The hinge is adjustable in height and width.





Specifications

1DBH-Z-BB-50

- Specially developed for automated gates
- Conical bearing version (CB): protected by housing, 1650 lbs axial load capacity
- ✓ 1" adjustable in width
- ✓ Version A-BB: with adjustment screws, recommended as
- ✓ Version Z-BB: universal, can be used as top or bottom
- ✓ Version Z-CB: hinge with high load capacity, recommended as bottom hinge

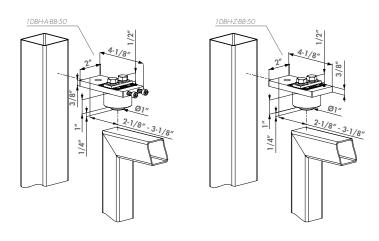





Order codes

1DBH-A-BB-50 Adjustable 90° hinge with stainless steel ball bearing and adjustment screws

1DBH-Z-BB-50 Adjustable 90° hinge with stainless steel ball bearing

1DBH-Z-CB-50 Adjustable 90° hinge with conical bearing



440 lbs 1650 lbs



180° - 3-way ornamental hinge

3DM (Patented)

Stainless steel hinge for aluminum and steel gates equipped with the fast Quick-Fix mounting hardware. The hinge is adjustable in three dimensions; height, left/right alignment and swing direction. Also available with hot-dip galvanized arm. This hinge is made to fit a 4" square post and a 1-1/2" to 2" gate frame.

Specifications

- ▼ 180° hinge for metal & aluminum gates with 4" Posts
- ✓ Innovative Quick-Fix mounting
- ✓ Reversible for left or right hand swing gates
- ✓ Vandal-proof
- ✓ Hinge socket, axle and socket cover plate in stainless steel

Order codes

Hinge arm in stainless steel 3DM-VP100-P50-A2

Hinge arm in hot-dip galvanized steel











Vandal-proof 4D-hinge for wooden gates

4DW (Patented)




Aesthetic, vandal proof hinge for wooden gates. The stainless steel hinge can be adjusted in 4 dimensions. Height, depth, left / right alignment and rotational direction can be adjusted. Adjustments can be made after installing the hinges. This way your gate is always perfectly aligned.

Specifications

- ✓ 180° hinge for wooden gates
- Adjustable in 4 dimensions: height, depth, left / right alignment and rotational direction

- ✓ Vandal-proof
- Perfect in combination with the H-Wood lock and SHKW keep



Order codes

Hinge arm in stainless steel	BS
4DW-300-A2	330 lbs
4DW-400-A2	330 lbs
4DW-500-A2	330 lbs

A	В	С	D	E	F
Length 11-13/16"			Ø3/8"	4-5/16"	1-1/2"
	Length 15-3/4"		Ø3/8"	4-5/16"	1-1/2"
		Lenath 19-11 / 16"	Ø3/8"	4-5/16"	1-1/2"


180° 3-way strap hinge

3DW (Patented)

Stainless steel strap hinge for wooden gates. The hinge is adjustable in three dimensions; height, left/right alignment and swing direction. This hinge is available with a stainless steel or hot-dip galvanized arm in two sizes.

Specifications

- ✓ 180° hinge for wooden gates
- ✓ Reversible for left or right hand swing gates
- ✓ Vandal-proof
- ♥ Hinge socket, axle and socket cover plate in stainless steel



Hinge arm in stainless steel	Hinge arm in hot-dip galvanized steel	LBS	
3DW-250-A2	3DW-250-HDG	770 lbs	
3DW-350-A2	3DW-350-HDG	770 lbs	
	3DW-450-HDG	770 lbs	

Α	В	C	D	E	F
Length 9-13/16"			Ø7/16"	4-5/16"	1-1/2"
	Length 13-3/4"		Ø7/16"	4-5/16"	1-1/2"
		1 17 2 / 411	OZ /1/II	4 5 /1/11	1 1 / 21









Compact 2-way adjustable 180° surface mounted hinge

PUMA

The Puma hinge is a compact surface mounted hinge with a powder coated aluminum housing. Its 180° opening angle together with its vertical and horizontal adjustability make the hinge flexible. Simple to install thanks to the Quick-Fix fastening system; no welding needed. This hinge easily supports gates up to 3.5 ft wide and 132 lb. The Puma hinge's aesthetic design perfectly fits aluminum and smaller residential gates.

Color options





Specifications

- ✓ For gates up to 3.5 ft wide and 135 lb
- ✓ For left and right opening gates
- \checkmark 5/8" adjustable in width and 7/8" in height
- ✓ No welding required: drill holes and fix with Quick-Fix

Compatible with TIGER gate closer



TIGER P. 14


r. 14

Order code

PUMA



132 lbs 2 x Quick-Fix



Spring hinge for garden gates


SWING40 (Patented)

Adjustable spring hinges for garden and walk gates. The set can be fitted inside 1-1/2", 16 Ga tubing. The SWING can easily be adjusted in strength from outside by means of an Allen key.



Specifications

- ⊙ One for the top, one for the bottom
- ${\color{red} arnothing}$ Installation: slides into top and bottom of gate frame
- ✓ Only for gate frames 1-1/2" sq, 16 & 14 gauge
- ✓ Reversible: left or right hand



Hangerbolt length	LBS
SWING40-130	165 lbs
SWING40-150	16.5 lbs

_A	В	C
M12	Length 5-1/8"	4-5/16"
M 12	Length 5-15/16"	5-1/8"





600



J-Bolt Stainless steel with polyamide plugs

GBM 12

Stainless steel garden gate J-Bolt hinge set. The set consist of 2 threaded M12 stainless steel hinge bolts with polyamide hinge plugs. The poly plugs fit into the top and bottom of the gate upright for an economical quality solution for small garden and walk gate

Specifications

- ✓ Hinge J-bolt M 12 in stainless steel
- ♥ Plug available for profile 1-1/2" or 2" square
- ✓ Length of the threaded J-bolt: 5-1/8" or 6" long
- ✓ Installation: plug slides into gate upright top and bottom

Hinge part



1040TPS-M12-

P. 134

Order codes

For square profiles 1-3/16" x 1-3/16"	For square profiles 1-1/2" x 1-1/2"	LBS	Α	В	C
GBM12-30-130	GBM12-40-130	130 lbs	M12	Length 5-1/8"	4-5/16"
GBM12-30-150	GBM12-40-150	130 lbs	M12	Length 5-15/16"	5-1/8"



J-Bolt Stainless steel with aluminum plugs

GBM 12-DP (Patented)

Stainless steel garden gate hinge set with reinforced aluminum plugs for extra stability. The economical quality solution for all your garden/walk gate projects.

Ø9/16

Specifications

- ✓ Hinge set with aluminum reinforced hinge post plugs
- ✓ Hinge J-bolt M 12 in stainless steel
- ♥ Plug available for profile 1-1/2" square
- ✓ Length of the threaded J-bolt: 5-1/8" or 6" long
- ✓ Installation: plug slides into gate upright top and bottom


Hinge parts




P. 134

P. 133

Hangerbolt length	LBS
GBM12-DP-40-130	165 lbs
GBM12-DP-40-150	165 lbs









J-Bolt Stainless steel with polyamide plugs

GBM 16

Hot-dip galvanized J-Bolt hinge set. The set consist of 2 threaded M 16 galvanized hinge bolts with polyamide hinge plugs. The reinforced plugs fit into the top and bottom of the gate upright for an economical quality solution for your walk gate projects.

Specifications

- ✓ With plastic hinge plug square 9/16"
- ✓ Hinge axle M16 in hot-dip galvanized steel
- ✓ Length of the threaded J-bolt: 6-1/4" or 7"
- ✓ Installation: plug slides into gate upright top and bottom

Hinge part




1040HDSM16-

P. 134

Order codes

Hangerbolt length	LBS.
GBM16-40-160	165 lbs
GBM16-40-180	165 lbs



Α	В	C
M16	Length 6-5/16"	5-5/16"
M16	Length 7-1/16"	6-1/8"

J-Bolt Stainless steel with aluminum plugs

GBM 16-DP (Patented)

Hot-dip galvanized steel garden gate hinge set with reinforced aluminum plugs for extra stability. The economical quality solution for all your garden/walk gate projects.

Specifications

- ✓ Hinge set with aluminum reinforced hinge post plugs
- ✓ Hinge axle M16 in hot-dip galvanized steel
- ♥ Plug available for profile 1-1/2" or 2" square
- ✓ Length of the threaded J-bolt: 6-1/4" or 7"
- ✓ Installation: plug slides into gate upright top and bottom

Hinge parts






1040HDSM16- P. 134

DURA P. 133

For square profiles 1-1/2" x 1-1/2"	For square profiles 2" x 2"	IBS		
GBM16-DP-40-160	GBM16-DP-50-160	220 lbs		
GBM16-DP-40-180	GBM16-DP-50-180	220 lbs		










J-Bolt Stainless steel

GAM 12

Stainless steel garden gate J-Bolt hinge set. The set consists of 2 threaded M12 stainless steel hinge bolts with 2 black steel welding ears. The economical quality solution for your garden and walk gate projects.

Specifications

- ✓ Hinge J-bolt M 12 in stainless steel
- ✓ Length of the threaded J-bolt: 5-1/8" or 6" long
- ✓ Welding ear in black steel

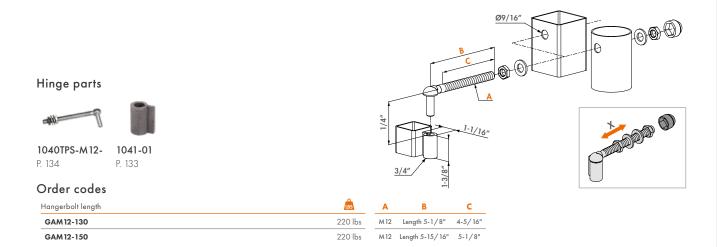



Specifications

✓ Component of the GAM 12 hinge

Welding ear in black steel

1041-01

Welding ear in black steel. Compatible with hinge axle 1040TPS-M12. Just weld on the ear to your gate and it's ready for coating.

A basic hinge solution for your small garden gates.



Order code

1041-01

For hangerbolt axe Ø1/2"




Aluminum reinforced post plug for hinges

DURA (Patented)

Hinge plug reinforced with aluminum for extra stability

Specifications

✓ Aluminum reinforced hinge plug



For 1040-TPS-M12	For 1040-HDS-M16	A	В	C	D
DURA-4040-12	DURA-4040-16	1-1/4"	1-9/16"	Ø7/16"- Ø9/16"	1-9/16"
	DURA-5050-16	1-7/8"	2"	Ø9 / 16"	2"






Stainless steel hinge axle M12

1040TPS-M 12-



Stainless steel hinge axle M12. Available in 2 versions: 5-1/8" or 5-15/16".

Specifications



Order codes

Hangerbolt length	Α	В	C
1040TPS-M12-130	M 12	Length 5-1/8"	4-5/16"
1040TPS-M12-150	M 12	Length 5-15/16"	5-1/8"



Hot-dip galvanized hinge axle M16

1040HDSM 16-

Hot-dip galvanized hinge axle M 16. Compatible with hinge plug DURA-4040-16 and DURA-5050-16.



✓ Hot-dip galvanized hangerbolt M16

Hangerbolt length	Α	В	С
1040HDS-M16-160	M16	Length 6-5/16"	5-5/16"
1040HDS-M16-180	M16	Length 7-1/16"	6-1/8"











Drop bolts & ground catchers

Drop bolts & Ground catchers

The Locinox range of drop bolts and ground stops offers a wide array of solutions. From the economical VSF dropbolt to our internal SUBY dropbolt, which is the top of the line in terms of ease of use and aesthetics.



138 Drop bolts

142 Ground catchers









Internal drop bolt

SUBY (Patented)

Internal aluminum drop bolt. An aesthetical solution for double leaf gates, the drop bolt disappears from view. The drop bolt is conveniently operated at waist height and if the handle is installed between the gate leaves, it becomes self locking. It fits inside 1-1/2" to 2-1/2" square tubing.









Color options










Specifications

- ✓ Height adjustability of the drop bolt: 4"
- ▼ Throw: 4-3/4"
- ✓ Internal dropbolt in aluminum
- Steel handle with black plastic coating (POM) provides the optimal combination between robustness, ergonomy and protection against corrosion
- Internal push spring guarantees a perfect closure (even if the drop bolt is blocked by dirt inside the ground stop) and prevents overpressure
- ✓ Designed for profiles up to 1/8" thick
- ✓ Fast & easy mounting: 2 screws
- User-friendly manipulation of the drop bolt at a convenient height
- For square gate profiles: 1-1/2", 2", or 2-1/2" and for rectangular gate profiles: 2-3/8" x 1-1/2"

Order code

SUBY For gate profiles 1-1/2" x 1-1/2", 2", 2", 2-1/2" x 2-1/2" and 2-1/2" x 1-1/2"



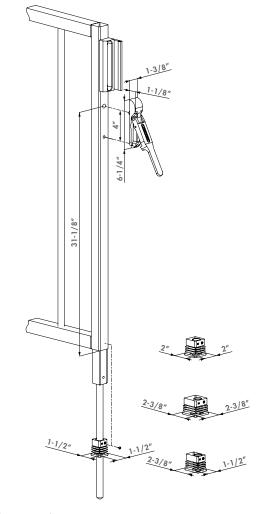

Compatible ground stop









Electrical drop bolt

ELECTRADROP (Patented)

Electrical 24V drop bolt with 4-1/2" throw for safe locking of automated swing gates. By securing your gate with a drop bolt you disburden the electric gate motors.

















Color options






Specifications

- ∨ Vandal proof, powder coated aluminum housing
- To be connected to the warning light on automated gates (min 3 sec prewarning signal) or directly on the gate automation
- Mechanical release possible (by key) in case of emergency
- Obstacle detection with automatic stop of the drop bolt in case of a pressure exceeding 40 lbs
- ✓ Consumption: 25 W / Standby: 0,2 W
- √ 16-1/2 ft cable included
- ✓ Included: 3012-37-STD-VSZ cylinder
- To connect to a Locinox DC-POWER-24V-25W power supply

Order code

ELECTRADROP For profiles 1-1/2" x 1-1/2" or more



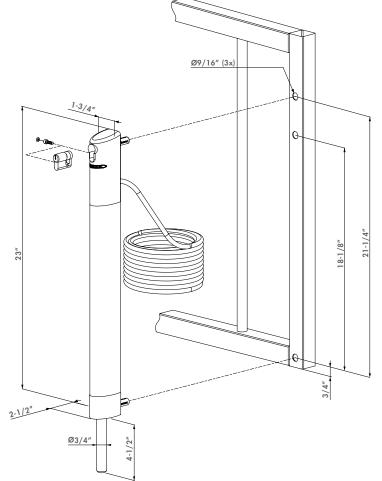

Compatible ground stop & power supply







Key Lockable drop bolt

KEYDROP (Patented)

Key lockable drop bolt. It is surface mounted for easy access and installation. It can be keyed to match the gate lock on the facing leaf. The KEYDROP enables you to lock the drop bolt in open or closed position. It is installed with our Quick-Fix mounting hardware and is interchangeable with our standard VSF and VSA drop bolts.













Color options












Specifications

- ∀ Throw: 5-1/2"
- ✓ Lockable drop bolt with cylinder
- ✓ Same drilling pattern as VSF and VSA
- ✓ Possible to match same key as gate lock
- ✓ Height adjustability of the drop bolt: 4"
- ✓ Height adjustability in 3 positions: 2" / position
- ▼ The gate can be locked in open or closed position
- ✓ For gate profiles 1-1/4" sq or larger

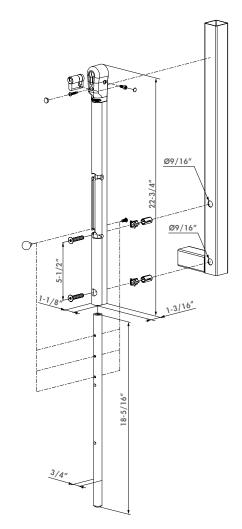

Order code

KEYDROP For profiles 1-1/2" x 1-1/2" or more 24h SHIPPING



Compatible ground stop









Surface mounted drop bolt

VSA / VSF

Standard self locking drop bolts with the innovative Quick-Fix mounting hardware. The drop bolt is auto-locked between the double gates so no key is required. This model has an aluminum housing and is available with an aluminum, galvanized steel drop rod.









Color options











Specifications


- ▼ Type VSF: hot-dip galvanized bolt
- ▼ Type VSA: aluminum bolt
- ✓ With aluminum head block
- ✓ For gate profiles 1-1/2" or more
- ✓ Height adjustability of the drop bolt: 4"
- ▼ Throw: 5-1/2"
- ✓ Self-locking between the leaves
- ✓ Fast and easy fixation with Quick-Fix
- ✓ Easy to retrofit

Order codes

VSA-K-QF1BL With pin in aluminum

VSF-K-QF1BL With hot-dip galvanized pin



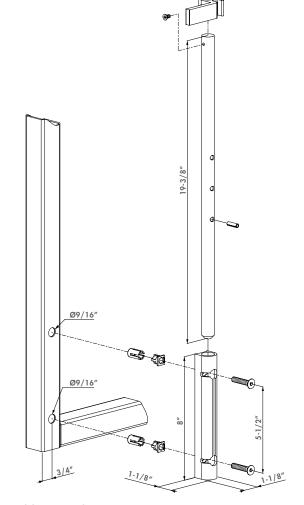

Compatible ground stop





Centered ground stop and catch

CGS




Strong ground stop and receiver for double leaf gates. It is recommended to be used in combination with the internal drop bolt SUBY. "Centered" refers to the positioning of the receiving ground pot, which is "centered" under the gate leaf when the gate is closed. The CGS has a removable receiver for easy and fast cleaning of the ground pot.

Specifications

Order code

- ✓ Only suitable with internal SUBY drop bolts
- ✓ Adjustable stop plate for 1-1/2" to 2-1/2" gate frames
- ✓ With water drain hose



Compatible drop bolt



SUBY P. 138

CGS Adjustable stop plate for 1-1/2" to 2-1/2" gate frames


Off-centered ground stop and catch



Strong ground stop for double gates. Recommended in combination with the external dropbolts VSF/VSA and Keydrop. The OGS has a removable tray for easy and fast cleaning of the ground catch.

Specifications

- Suitable for surface mounted drop bolts (VSF VSA ELECTRADROP - KEYDROP)
- ✓ Adjustable stop plate for 1-1/2" to 2-1/2" gate frames
- Removable polyamide cleaning recipient
- ✓ With water drain hose



Compatible drop bolts





ELECTRADROP

VSA / VSF P. 141



KEYDROP

Order code

OGS Adjustable stop plate for 1-1/2" to 2-1/2" gate frames





Economic ground catch for drop bolt

EGS




Economic ground catch/drop bolt receiver for drop bolts with maximum bolt of 3/4". With draining hole.

24h SHIPPING

Specifications

- Simple and economic In-ground catch designed to put in concrete
- ✓ Without stop plate
- ${\color{red} {\it extsf{arepsilon}}}$ Hot-dip galvanized base-plate with polypropylene catcher
- ${\it ext{ ext{ o}}}$ For drop bolts with a maximum bolt diameter of 3/4"



Compatible drop bolts









EGS Economic ground stop, without stop plate

Order code

SUBY P. 138

P. 140

VSA / VSF P. 141

ELECTRADROP P. 42







Gate catchers

Gate catchers

Gate catchers hold your gate open without inflicting any damage. They are adjustable in height to fit your gate and the used profiles. The gate catchers are made of aluminum or hot-dip galvanized steel.



146 Hot-dip galvanized gate catchers









146




Specifications

- ✓ Hot-dip galvanized U-profile in steel
- ✓ Catch hook in aluminum
- ✓ Height adjustability: 2-1/16"

Gate hold-back catch hot-dip galvanized

Galvanized steel gate hold back. The adjustable catch reaches through the gate and is designed to catch a horizontal profile. It is to be set into concrete for a secure installation. For gate profiles up to 2".



Alternative gate catchers




Order code

ABK For gate profiles with a max. width of 2"


Gate hold-back catch hot-dip galvanized

Galvanized steel gate hold back. The adjustable catch reaches through the gate over the bottom rail. It is designed to be set into concrete. The catch hook is 2" adjustable in height. For gate profiles up to 2".



Specifications

- ✓ Hot-dip galvanized U-profile in steel
- ✓ Stainless steel bolt
- ✓ Catch hook in aluminum
- ✓ Height adjustability: 2-1/16"



Alternative gate catchers



Order code

ABL For gate profiles with a max. width of 2"

UGC P. 147









Gate hold-back catch in aluminum

UGC

Aluminum gate hold back. The adjustable catch reaches under the gate catching the bottom rail and the hook can easily be reversed. The rubber stop and polyamide catch hook avoid damaging the gate frame. Very fast and strong installation in concrete. For gate profiles from 1-1/2" to 2-1/2". Simple height adjustment of 1-1/2".


Color options



Specifications

- ✓ Aluminum silver coated chassis
- ✓ Anchoring holes to put in concrete
- ✓ Height adjustability of the catch hook: 1-1/2"

- ✓ Catches bottom side of the gate



Order code

UGC Under Gate Catch for 1-1/2" to 2-1/2"



Gate hold-back catch in aluminum

IGC

Aluminum gate hold back. The adjustable catch reaches through the gate over the bottom rail and the hook can easily be reversed. The rubber stop and polyamide catch hook avoid damaging the gate frame. Very fast and strong installation in concrete. For gate profiles from 1-1/2" to 2-1/2". Simple height adjustment of 1-1/2".

Color options




Specifications

- ✓ Aluminum silver coated chassis
- ✓ Height adjustability of the catch hook: 1-1/2"

SHIPPING

- ✓ Catches upper side of the gate





IGC In-Gate Catch for 1-1/2" to 2-1/2"







Tooling

Locinox guarantees a quick, qualitative and perfect installation thanks to the in-house developed calibres.



150 Tools for locks & keeps

152 Tools for gate closers



156 Miscellaneous






Drilling jig for swing gate locks

3970USA

Drilling jig to prepare the gate-/strike-post for LA- / LE- / LM-locks and according keeps (SA / SH / SM). The jig can be adjusted for profiles 1" / 1-1/4" / 1-1/2" / 1-3/4" / 2" / 2-1/2". The jig guarantees a perfect center alignment of the lock/keep on your posts.

Specifications

- ✓ Drilling jig for surface mounted swing gate locks and its keeps
- ✓ Adjustable for profiles from 1-1/2" 2" 2-1/2"



Order code

3970USA

For swing gate locks




Drilling jig (Special Order Only)

3970LS

Drilling jig to prepare the gate- and strike-post for sliding gate locks and according keeps. The jig can be adjusted for profiles 1-1/2" - 2" - 2-3/8" or 2-3/8" - 3-1/8" according to jig version. The jig guarantees a perfect center alignment of the lock/keep on your posts.

Specifications

- ✓ Drilling jig for: LS- & LL-locks and SSKZ/SSKO keeps



Order codes

3970LS-4060

3970LS-6080

For sliding gate locks 1-9/16" - 2" - 2-3/8"

For sliding gate locks 2-3/8" - 3-1/8"



Drilling bit Ø 15 mm (5/8") with drill-chuck Ø 13 mm (1/2")


DRILLØ15

HSS drill with \emptyset 15 mm (5/8") and drill-chuck \emptyset 13 mm (1/2"). Fits any hand drilling machine.



Specifications

- ✓ Drilling bit Ø9/16" with drill-chuck Ø1/2"
- $\ensuremath{\mathscr{G}}$ For preparation of your profiles
- ✓ For use with the drilling jig 3970USA



Order code

DRILLØ15







NEW

Tool case with drilling jig for surface mounted locks and corresponding keeps

DRILL-FIX






24h SHIPPING



Specifications

- Tool case with self-centering drilling tool for fast assembly of Locinox surface mounted gate locks and keeps
- Drill jig can be used for round, square or rectangular profiles from 30 up to 76mm (1-1/4" up to 3")
- ✓ Includes 3 drill bits (Ø9,5 mm, Ø15 mm, Ø18 mm)
- ✓ Useful for installation of Locinox bolt-on locks and keeps in 4 easy steps
- ✓ Includes LA Locitool
- ✓ Includes Allen Key and positioning pin



Order code

DRILL-FIX Tool case with drilling jig for lock and keep 24h SHIPPING

4 Easy installation steps









Compatible locks



LAKQ U2 P. 59



LDKZ D1 P. 65



LMKQ V2



LAKQ H2 P. 71

Compatible keeps



MODULEC-SA P. 29



SAKL QF P. 95



SHKL QF P. 95



SMKL QF P. 96





Installation and Drilling jig for Tiger gate closer

TIGERDRILL

Tool case with installation and drilling jig to perfectly align and install the Tiger gate closer and its Puma hinge. This tool guarantees perfect alignment and a fast and easy installation. No measuring needed, just fix the tool on the post, drill the holes, install the Tiger and Puma, and close the gate.








Specifications

- ${\it extstyle igwedge}$ Includes 2 drill bits ${\it extstyle \it e$
- Spare set with 10 Quick-Fix expanders
- Solid plastic box with compartments for convenient storage
- ${\color{red} {\it ext{$arphi}}}$ Includes accessories for assembly and adjustment of Tiger
- ✓ Recommended to be combined with Drillvise-IV



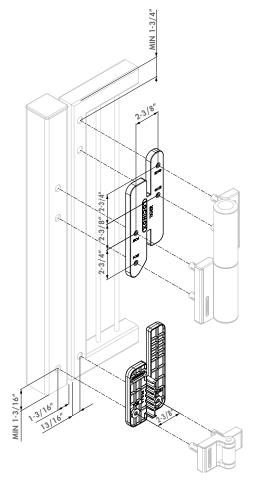

Order code

TIGERDRILL Installation and drilling jig for Tiger gate closer 24h

Recommended accessories



DRILLVISE-II P. 155



DRILLVISE-IV P. 155



NEW

Installation and Drilling jig for Rhino gate closer

RHINODRILL


Tool case with installation and drilling jig to perfectly align and install the Rhino gate closer on the existing hinges. This tool guarantees perfect allignment, fast and easy installation. There is no more measuring needed, just fix the tool on the post, drill the holes, install the Rhino and close the gate.





Specifications

- ${\color{red} {arphi}}$ Includes 2 drill bits ${\color{red} {\varnothing}}5$ mm and ${\color{red} {\varnothing}}$ 15 mm
- Spare set with 10 Quick-Fix expanders
- Solid plastic box with compartments for convenient storage
- ✓ Positions Rhino perfectly with regards to the Locinox hinge
- ✓ Includes accessories for assembly and adjustment of Rhino

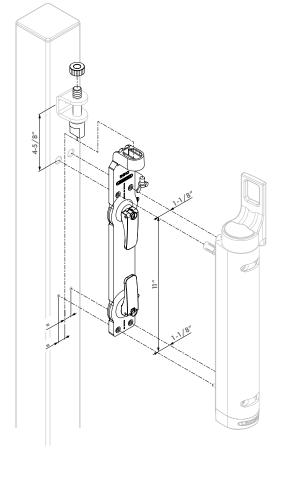



Order code

RHINODRILL Assembly and drill calibre for Rhino gate closer

Recommended accessories



DRILLVISE-II P. 155



DRILLVISE-IV P. 155





Assembly and drill calibre for Lion and Verticlose-2 gate closers

LION-VTC-DRILL


Toolbox with the required tools to install both Lion and Verticlose-2 gate closers very quickly and efficiently. The Lion-VTC Drill guarantees a flawless alignment of the gate closer in relation to the gate. No more measuring - just fix, drill, install and ready. Highly recommended.





Specifications

- Sturdy case with compartments
- Spare set with 10 Quick-Fix expanders
- ✓ Includes 2 drill bits Ø5 mm and Ø15 mm

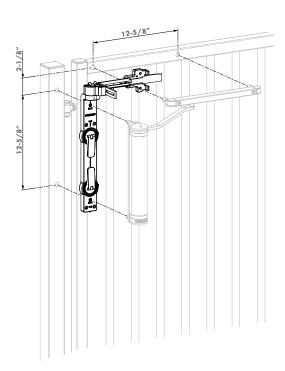



Order code

LION-VTC-DRILL Installation and drilling jig for Lion & VTC-2 gate closers 24h SHIPPING

Related products



DRILLVISE-II P. 155



DRILLVISE-IV



Tools

Clamp set for gate frame positioning


DRILLVISE-II

Handy toolbox with all components to position the gate frame as opposed to the fixed post upon assembly of the hinges, gate closers and other accessories.



Specifications

- Solid plastic box with compartments for convenient storage
- 2 special clamps with 1-3/16" to 4-3/4" adjustability with support plates to position gate frames



Related products



Order code

DRILLVISE-II Clamp set for gate frame positioning

TIGERDRILL P. 152

P. 153

Toolbox with 4 Locinox clamps

DRILLVISE-IV


Toolbox with set of 4 clamps to fix drill tools and accessories for assembly or installation. Perfect when combined with Tigerdrill for installation Tiger gate closer.



Specifications

- Solid plastic box with compartments for convenient storage

- Soft plastic mounting surfaces guarantee a perfect grip without risk of damage



Related products



Order code

DRILLVISE-IV Toolbox with 4 Locinox clamps

P. 152

RHINODRILL P. 153



24h SHIPPING

Stainless steel fixation bolt with high pulling resistance

QUICK-FIX (Patented)

Quick-Fix guarantees an easy, fast and highly robust mounting. The new generation of the Quick-Fix can be reused completely many times thanks to its innovative design.

Specifications

- ✓ Patented mounting system out of stainless steel
- ✓ Very strong: 2000 lbs pulling resistance
- ✓ Innovative design which guarantees reuse of the Quick-Fix
- Short version: for profiles with thickness till 3/16"
- ✓ Long version: for profiles with thickness from 3/16" till 5/16"

Order code

QUICK-FIX

Patented mounting system

Quick-Fix Expander 11 / 16" or 15 / 16"


QF-EXF

Spare expanders of the old Quick-Fix in case of loss or maintenance.



Specifications

Available in lengths of 1" for min. profile 1-1/2" (recommended) or 11/16" for profile 1-3/16"



Order codes	Α
QF-EXP-M8-17	Length 11/16"
QF-EXP-M8-24	Length 1"



The unique Quick-Fix fastening system guarantees an extremely secure fixing on all your gates and fences. As a unique patented solution, Quick-Fix ensures an assembly which is twice as quickly.

QUICK ASSEMBLY

Quick-Fix is pre-assembled on the product. You win valuable time on site, which allows you to be quicker with your next customer. You only need to drill the required 9/16" holes, place the product on the holes, fix and ready!

FIRM ANCHORING

With its 2.000 lbs tensile strength a firm anchoring is always guaranteed. Quick-Fix is available for profiles with a wall thickness from 1/16" to 3/16".

CORROSION FREE

Locinox relies upon the best materials. This also applies to Quick-Fix which is 100% made of premium stainless steel. Quick-Fix easily passes the 1,000h salt spray test. Want to know more? Watch the video on our website.









1 mars and 1 mars and

24h SHIPPING


Handy mounting tool for locks

LOCITOOL LA

Mounting tool for surface mounted gate locks. The Locitool has a 3 mm Allen key for the adjustment of the bolts and fixing of the handles. With the 6 mm Allen key you can fix all Locinox locks. The screwdriver can be used to change the cylinder, open the lock box or change the daybolt from right to left-turning.

Specifications

- Phillips screwdriver to change the self-latching bolt, cylinder and lockbox



Order code

LOCITOOL LA

Mounting tool for locks




Handy mounting tool for gate closers

LOCITOOL LB

Mounting tool for gate closers. The Locitool has an M3 allen key for the adjustment of the closing speed and power of the gate closer. With the M4 allen key you can adjust the closing power of the gate closers. The M5 allen key is used for the Quick-Fix fixation.

Specifications

✓ Easy and robust installation tool for a complete installation and adjustment of any Locinox gate closer



Order code

LOCITOOL LB

Mounting tool for gate closers




3 24h SHIPPING

Adjustable rollerbolt

ROLLTOP

Stainless steel "rollerbolt" for LA-locks. It fits Industrial, Ornamental, Mechanical, Electrical, and Swimming Pool locks. The standard chamfered latch tip can be replaced with the rollerbolt to reduce latch resistance and allow the gate close and latch easier. This ensures a smooth closing of the lock into the keep. The rollerbolt has a bolt adjustment hole for latch bolt length adjustment.

Specifications



Order codes

Order codes	A	В
ROLLTOP-30	11/16"	1-1/8"
ROLLTOP-40	1"	1-7/16"
ROLLTOP-60	1-13/16"	2-3/16"





Accessories

Modularity, compatibility and flexibility within our product range give you an endless amount of solutions. Build your own product to fit your production processes and product range. Locinox makes sure your orders are handled quickly and correctly.



160 Handles



168 Adaptor plates



173 Cylinders


177 Accessories for gates



179 Post plugs & caps



Handle compatibility



	SURFACE A	MOUNTED LOCKS	INSERT LOCKS			
			A = 1-3/8"	A = 1-1/2"	A = 2"	A = 2-3/8"
3006C		✓	✓			
30061		✓	✓	✓		
3006D		✓	✓			
3006M	To com	✓	✓			
3006J		✓	✓	✓		
3006R	@	✓				
300FA		√	✓			
3006P		✓		only for P	1 lockbox	
3006G		✓	✓	√		
3006С-Н	80					√
3006I-H					✓	✓
3006М-Н	60			√	✓	✓
3006J-H		✓	✓	✓	✓	✓
3006R-2		✓	✓			
KIDLOC-2		✓				
KIDLOC	6 0-00	✓	✓	√		
3006KR		✓				
PUSHBAR		✓		√	✓	
3006PUSH	TP III	✓				
3006T11		✓				




Childproof security knob

KIDLOC (Patented)

Anodized aluminum and polyamide security knob providing child safety. At least one button must be pressed while turning the knob. Impossible for children younger than 5 years, conform to swimming pool standard NF P90-306.

Specifications

- ✓ Polyamide and stainless steel
- ✓ For all locks with a 8 mm shaft (appx 5/16")
- Security knob for swimming pools, playgrounds, kennels,...
- Conforms to the European swimming pool standard NF P90-306



Order code

Security knob

KIDLOC

Follower length 3-9/16"




Aluminum knob blocking set

3006KR

Aluminum round blocking knob set. The kit allows the following three combinations: one side fixed with one side operational, both sides fixed, or one side blocked with one side operational. The set is recommended in combination with our gate locks when access control is needed and allows our standard Ornamental or Industrial locks to be used in the following applications: Free Exit, Dead Latch, or Store Room.

Specifications

- ▼ The kit permits the following combinations:
- ✓ 1 side blocked or blinded or 1 side working (movable)
- ✓ 2 sides blocked
- ✓ 2 sides working (movable)



Order code

Aluminium handle blocking set

3006KR

Follower length 3-9/16"



3006PULL

Handle set 3006PULL

This aluminum powder coated handle set has an elegant design. This handle set could be used in combination with magnetic locks (e.g. if used top/bottom), or any gate that needs a sturdy and elegant pull handle independent of the latching mechanism.

Color options





Specifications

- ✓ Aluminum powder coated handle
- ✓ Combination possible with MAGMAG lock on top and bottom

SHIPPING

Order code

Aluminium powdercoated handle set

3006PULL

Fixation bolts not included





246

Push handle set in aluminum

3006PUSH

Aluminum Push handle set allows opening of the lock with a push movement in the same direction as the opening of the gate. The Push-set replaces the normal handle and the back side is blocked. The handle set ONLY fits the Industrial lock and allows it to be used in the following applications: Safety Exit, Free Exit, Dead Latch, or Store Room Lock.

Color options




Specifications

▼ The set is adaptable on all surface mounted Locinox locks with aluminum U-lock box

SHIPPING

- ▼ The 3006PUSH replaces the handles
- ✓ Facilitates the opening of the gate



Order code

Push-set in aluminum

3006PUSH

1 Ollower length 2-3/ 0



NEW

SHIPPING

Aluminum push bar for insert locks

PUSHBAR-H-


Panic bar for an easy opening and a free exit of a gate by a simple push. The aluminum PUSHBAR replaces the standard handle on the existing locks, operates the daybolt and can quickly be installed on new or existing Locinox hybrid insert locks. The PUSHBAR is available in a short version (45-1/4") and a long version for 4ft. gates (55-1/8") for gates up to 5 ft. The push bar can however be perfectly shortened to fit any gate.

Color options



Specifications

- Black powder coated aluminum push bar with stainless steel mechanism
- Only compatible with H-Metal, H-Wood and Sixtylock
- ✓ For left and right turning gates
- ✓ Blinded 5/16" follower included
- Possible to combine with half handle sets with 5/16" follower
- Maximum gate width: 4 ft. for 45-1/4" version and 5 ft. for 55-1/8" version

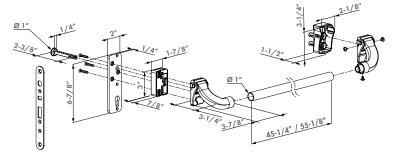

Compatible locks



Order codes

PUSHBAR-H-1150 Aluminum push bar for insert locks - Length 45-1/4"

PUSHBAR-H-1400 Aluminum push bar for insert locks - Length 55-1/8"

H-METAL P. 83

H-WOOD

SIXTYLOCK P. 82







NEW

Push bar in aluminum for surface mounted gate locks

PUSHBAR-L-

Panic Bar for an easy opening and a free exit of a gate by a simple push. The aluminum PUSHBAR replaces the standard handle, operates the daybolt and can quickly be installed on new or existing Locinox surface mounted gate locks (LA, LP and LF chassis). The PUSHBAR is available in a short version for 4 ft. gates (45-1/4) and a long version for 5 ft. gates (55-1/8). The push bar can however be perfectly shortened to fit any gate.




Color options



Specifications

- Black powder coated aluminum push bar with stainless steel mechanism
- ✓ For left and right turning gates
- ✓ Easy to install on the gate with Quick-Fix
- ✓ Blinded 5/16" follower included
- Possible to combine with half handle sets with 5/16" follower
- Maximum gate width: 4 ft. for 45-1/4" version and 5 ft. for 55-1/8" version

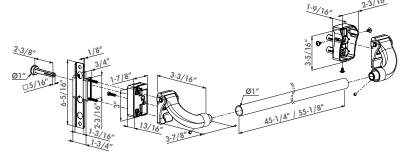

Compatible locks

P. 59



P. 67

P. 63

Order codes

PUSHBAR-L-1150 Aluminum push bar for surface mounted locks - Length 45-1/4"

PUSHBAR-L-1400 Aluminum push bar for surface mounted locks - Length 55-1/8"


Triangular spindle

3006T11



Specifications

- Spindle in a triangular form of 7/16" to be used with triangle key
- ✓ Possible to insert in the handle opening of any LA lock



Order codes

3006T11

27/64" triangular spindle










Specifications

- ✓ Handle pair in anodized aluminum
- ✓ Square 8 mm shaft (appx 5/16")

Club handle pair in aluminum

3006C

Aluminum club-handle pair



Order code

Aluminum handle pair

3006C


Follower length 2-3/8'



✓ Handle pair in anodized aluminum ✓ Square 8 mm shaft (appx 5/16")

Modern handle pair in anodized aluminum

Aluminum modern handle pair



Order codes

Aluminum handle pair

3006M

3006M-H

Follower length 2-3/8" Follower length 4-3/4"




Anodized aluminum handle pair

Aluminum handle pair



- Special design of the handle avoids bumping of the hand against the stop plate
- ✓ Square 8 mm shaft (appx 5/16")



Order codes

Aluminum handle pair

3006J

3006J-H

Follower length 2-9/16" Follower length 4-3/4"



Reinforced aluminum handle pair

3006S

Reinforced aluminum handle pair. Recommended as a standard for all sliding gate locks. Resistant against high forces during opening and closing of the gate.

Specifications

- ✓ Only applicable on Locinox sliding gate locks
- ✓ Square 10 mm shaft (appx 5/16")

Order codes

Reinforced aluminum handle pair

3006S

3006S-H





5-3/8




Ornamental handle pair in zamac

3006FA

Zamac ornamental handle pair

Specifications

- ✓ Handle pair in powder coated zamac
- ✓ Square 8 mm shaft (appx 5/16")



Order code

Zamac handle pair

3006FA

Follower length 2-9/16"




Aluminum handle pair

3006D

Aluminum handle pair.



- ✓ Handle pair in anodized aluminum
- ✓ Square 8 mm shaft (appx 5/16")



Order codes

Aluminum handle pair

3006D

Follower length 2-3/8"



Stainless steel handle pair

Stainless steel handle pair

- ✓ Square 8 mm shaft (appx 5/16")



Stainless steel handle pair

30061

3006I-H



Ø13/16"




Handle pair in polyamide

3006G

Handle pair in polyamide.

Specifications

- ✓ Square 8 mm shaft (appx 5/16")
- Special design of the handle avoids bumping of the hand against the stop plate



Order code

Polyamide handle pair

3006G





Garden handle pair in polyamide

3006P

Polyamide handle pair


Specifications

- ✓ Square 8 mm shaft (appx 5/16")

Order code

Polyamide handle pair

3006P






Round knob pair in aluminum

3006R

Aluminum round handle pair



- ✓ Round knobs in aluminum
- ✓ Square 8 mm shaft (appx 5/16")




Order code


Aluminum handle pair

3006R

Follower length 3-9/16"

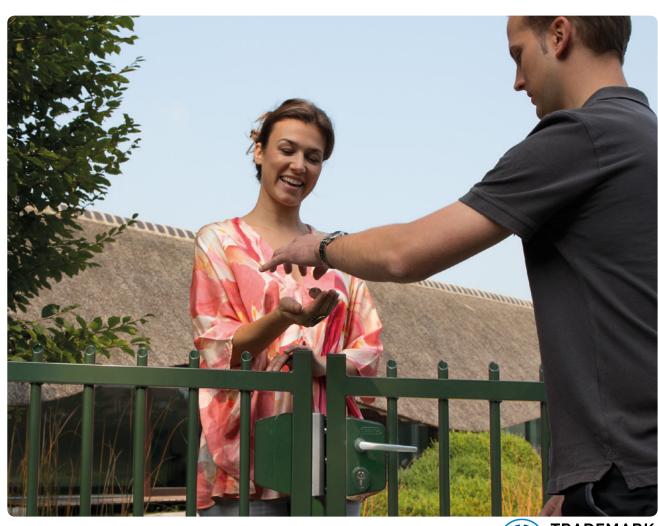








Specifications

- ✓ Round knob in aluminum
- ✓ Square 8 mm shaft (appx 5/16")



Order code

Aluminum round knob

3006R-2



KIDLOC-2

Childproof security knob half handle

Half aluminum round handle. One side blinded.

Half handle anodized aluminum and polyamide security knob providing child safety. At least one button must be pressed while turning the knob. Impossible for children younger than 5 years, conform to swimming pool standard NF P90-306.

Specifications

- ✓ Polyamide and aluminum
- ✓ For all locks with a 8 mm shaft (appx 5/16")
- Security knob for swimming pools, playgrounds, kennels,...
- ✓ Conforms to the European swimming pool standard NF P90-306

Order code

Security knob KIDLOC-2







Adaptor plates

Adaptor plate for LA and LS locks

3019LA



Adaptor plate for gate frames for our Ornamental, Industrial, Electrical, Garden Gate, Swimming Pool, Mechanical Code, and Sliding Gate locks. The adaptor plate is mounted between the Lock and gate frame.

1/16"

Specifications

- ✓ Aluminum adaptor plate for LA- & LS locks
- ✓ Adaptor plate => Ø1-3/8" to 2-3/8"

Compatible locks









P. 78

Order code

3019LA Adapter plate for round posts Ø1-1/2"

Adaptor plate for SA keeps

P. 59


3018LA

The adaptor plate is mounted between the keep





- ✓ Polyamide adaptor plate for SA-keep
- ✓ Adaptor plate => Ø2-3/8"



Compatible keep



SAKL QF

Order code

3018LA Adapter plate for round posts Ø2-9/16"

Adaptor plate for SH keeps


6403

The adaptor plate is mounted between the keep and post.



Specifications

- ✓ Aluminum adaptor plate for SH-keeps
- ✓ Adaptor plate => Ø2-3/8"



WWW.TMHARDWARE.COM

Compatible keep



SHKL QF P. 95



Order code

6403 Adapter plate for round posts Ø2-9/16"



Chain link tension bar adapter


CLH-

This tension bar adaptor fits around our industrial, electrical, garden and sliding gate locks to give an aesthetic, finished look to chain link gates. There is a separate chain link tension bar adapter available for the mechanical code locks.

24h SHIPPING

Specifications

- ✓ Hot-dip galvanized steel
- ✓ Install with 2 tension bands
- ▼ Ties in with the tension bar for a finished look

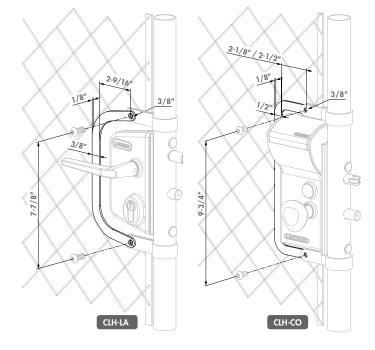

Order codes

CLH-LA

CLH-CO

Chain link tension bar adaptor for standard gate locks

Chain link tension bar adaptor for mechanical code locks





SHIPPING

Anti-theft protection plate for standard SA and Modulec SA keeps SHIELD-SA-

Vandal-proof protection plate in aluminum. This plate protects the latch bolt and the night bolt. Compatible with Locinox keeps (type SA and Modulec-SA).


Specifications

- ✓ Vandal-proof protection plate
- ✓ Powder coated aluminum housing
- Serves as a pick plate use for extra security
- Shield can easily be mounted on the surface mounted lock and is available for gate frames of 1-1/2" to 2-1/2" $\,$ Related products









Order codes

SHIELD-SA- Adaptor plate for square to round posts for SA and MODULEC-SA keeps



Anti-theft protection plate for security SH keeps and Modulec SH keeps

SHIELD-SH-

Vandal-proof protection plate in aluminum. This plate protects the latch bolt and the night bolt. Compatible with Locinox keeps (type SH and Modulec-SH).


SHIPPING **Specifications**

- ✓ Vandal-proof protection plate
- ✓ Powder coated aluminum housing
- ♥ Provided with plastic sliding sleeves for a perfect pen guidance. Very convenient in combination with gate closers
- ✓ Shield can easily be mounted on the surface mounted. lock and is available for gate frames of 1-1/2" to 2-1/2"
- ✓ Can be combined with keeps SH and Modulec-SH

Related products



SHKL QF



Order codes

SHIELD-SH- Adaptor plate for square to round posts for SH and MODULEC-SH keeps

Adaptor plate for Modulec strike

3018MOD-

Adaptor plate for square to round posts for Modulec electric strike. The plate is mounted between strike and post. A perfect fit for round posts.



Specifications

- Aluminum adaptor plate for Modulec on round profiles
- ✓ Separate versions for SA and SH available
- ✓ Is easily installed between strike and post

Order codes

Adaptor plate for square to round posts for MODULEC-SA electric 3018MOD-SA

3018MOD-SH

Adaptor plate for square to round posts for MODULEC-SH electric strike 24


Recommended keeps



MODULEC-SA P. 29



MODULEC-SH P. 29












Galvanized bracket to mount Samson-2 to chain link fence (USA only)

SB-

The chain link mounting bracket allows the Samson gate closer to easily adapt to gates with round profiles and round hinge posts. Brackets are galvanized steel with U-Bolts and stainless SD&T screws to lock the brackets into position. Available to fit 3" or 4" round posts and 1-5/8" or 1-7/8" gate frames.

Specifications

- ✓ Compatible with Samson-2



Order codes

SB-3015		
SB-3020		
SB-4015		
SB-4020		

A	В	C	D	E	F	G	н
1-5/8"	1-5/8"	2-3/16"	1-9/16"	4-1/2"	3"	3"	4-3/4"
1-7/8"	1-7/8"	2-3/8"	1-3/4"	4-13/16"	3"	3"	4-3/4"
1-5/8"	1-5/8"	2-3/16"	1-9/16"	4-1/2	4"	4"	5-7/8"
1-7/8"	1-7/8"	2-3/8"	1-3/4"	4-13/16"	4"	4"	5-7/8"





Chain link bracket for Tiger gate closer

CLB-TIGER




High quality aluminum bracket for installation of Tiger gate closer on round chain link fences. The brackets are installed between gate closer and post. A perfect, firm and easy installation is guaranteed thanks to the drilling jig. The brackets for the Puma hinge are included.

24h SHIPPING

Specifications

- ✓ Aluminum anodized assembly brackets for Tiger on chain link fences
- Ø Diameter post: 1-7/8" to 4"
- ✓ Diameter gate profile: 1-3/8" to 1-7/8"
- Ø Drilling jig included for easy installation



Order code

CLB-TIGER

NEW

Chain link bracket for Mammoth gate closer


CLB-MAMMOTH

High quality aluminum bracket for installation of Mammoth gate closer on round chain link fences. The brackets are installed between gate closer and post. A perfect, firm and easy installation is guaranteed thanks to the drilling jig. The brackets for the Dino hinge are included.



Specifications

- ✓ Aluminum anodized assembly brackets for Mammoth on chain link fences
- ✓ Diameter post: 1-7/8" to 4"
- ✓ Diameter gate profile: 1-3/8" to 1-7/8"
- ✓ All fixations included
- Ø Drilling jig included for easy installation



Order code

CLB-MAMMOTH









Triangular cylinder set for triangle keys

3012-POC-

Stainless steel symmetric Europrofile cylinder set with which you can equip each Locinox lock with a triangular key access control on cylinder level. Available for the 7/16", 9/16" or 11/16" triangle key. Applications: waste management, access fire brigade, parking facilities,...

Specifications

- \checkmark Universal compatibility for $\bar{7}/16$ ", 9/16" or 11/16" triangle keys

Compatible triangle keys







3071-T11 P. 1*7*6

3071-T14 P. 176

Order codes

Triangle width	A B	С
3012-POC-T11	11 mm (7/16")	3071-T11
3012-POC-T14	14 mm (9/16")	3071-T14
3012-POC-T17	17 mm (11	/16")











Europrofile cylinder with three keys: 46mm (1-13/16"), keyed alike or keyed to differ.

Specifications

- ✓ VCA: keyed different





54 mm cylinder (2-1/8" L)

3012-54-STD

Europrofile cylinder with three keys: 54mm (2-1/8"), keyed alike or keyed to differ.






Specifications

- ✓ VSZ: keyed different
- ✓ GSZ: keyed alike Z

- GSZ: Cylinders in different lengths are not compatible with each other







Order codes

3012-54-STD-VSZ	Symmetric 1-1/16" - 1-1/16" cylinder, keyed to differ
3012-54-STD-GSZ	Symmetric 1-1/16" - 1-1/16" cylinder, keyed alike Z
3012-54-STD-GSY	Symmetric 1-1/16" - 1-1/16" cylinder, keyed alike Y
3012-54-STD-GSX	Symmetric 1-1/16" - 1-1/16" cylinder, keyed alike X

60 mm cylinder (2-3/8" L)

3012-60-STD

Europrofile cylinder with three keys: 60mm (2-3/8"), keyed alike or keyed to differ.






Specifications

- \checkmark 60 mm (2-3/8") Europrofile cylinder with three keys
- GSZ: Cylinders in different lengths are not compatible with each other







Order codes

3012-60-STD-GSZ Symmetric 1-1/4" - 1-1/4" cylinder, keyed alike
3012-60-STD-VSZ Symmetric 1-1/4" - 1-1/4" cylinder, keyed to differ

24h SHIPPING




80 mm cylinder (3-1/8" L)


3012-80-STD

Europrofile cylinder with three keys: 80 mm (3-1/8"), keyed alike or keyed to differ.

Specifications

- \checkmark 80 mm (3-1/8") Europrofile cylinder with three keys





Order codes

3012-80-STD-GSZ Symmetric 1-1/2" - 1-1/2" cylinder, keyed alike

3012-80-STD-VSZ Symmetric 1-1/2" - 1-1/2" cylinder, keyed to differ





37 mm half cylinder (1-7/16"L)


3012-37-STD



Half Europrofile cylinder 37mm (1-7/16"). Same keys as GSZ-cylinders. Used for Keydrop, Keysafe and Electradrop.

SHIPPING **Specifications**

- ✓ One side key / one side blind
- ✓ Used with Keydrop, Electradrop and Keysafe
- each other



Order code

3012-37-STD-GSZ Asymmetric 3/8" - 1-1/16" cylinder, keyed alike Z



54 mm dummy cylinder (2-1/8" L)


3012-54-DSA

Dummy cylinder Europrofile 54mm (2-1/8"). Prevents the lock from being locked by disabling the dead bolt.

Specifications

- Dummy cylinder disables dead bolt locking
- ✓ For panic gates in combination with the 3006PUSH and PUSHBAR





Order code

3012-54-DSA Europrofile dummy cylinder 2-1/8"



Blank key 1-13/16"

3070-46

Key blank that allows you to reproduce copies



Specifications

- ✓ Blank key for cylinder 1-13/16"
- ▼ For reproducing cylinders keys for 3012-46-STD



Order code

3070-46 Blank key for reproducing 2-1/8" cylinders




Blank key 2-1/8"

3070-54

Key blank that allows you to reproduce copies

Specifications

- ✓ Blank key for cylinder 2-1/8"
- ✓ For reproducing cylinder keys for 3012-37-STD, 3012-54-STD





3070-54 Blank key for reproducing 1-13/16" cylinders




60 mm cylinder (2-3/8" L)

3012-60-KNOB

Europrofile cylinder with three keys and knob-turn on one side (single cylinder). Used when a free exit is required on one side.

- ✓ One side key / one side knob
- ✓ Free entrance on one side



Order codes

3012-60-KNOB-GSZ Symmetric 1-1/4" - 1-1/4" knob cylinder, keyed alike

3012-60-KNOB-VSZ Symmetric 1-1/4" - 1-1/4" knob cylinder, keyed to differ




Mortise cylinders set


MRT-118

Set with 2x Mortise cylinders and 4 keys. Fits our new LUKY lock. Cylinders available in keyed alike and keyed to differ.

Specifications

- ✓ Length 1"1/8 ✓ Adams Rite cam type 863A
- ✓ Satin Nickle Plated
- √ 1,360" face diameter





WWW.TMHARDWARE.COM

Order codes

MRT-118-GMA Cylinder keyed alike 24h SHIPPING

MRT-118-VMZ Cylinder keyed to differ 24h




Triangle Key

3071-

Compatible with a lock that is equipped with an 7/16" or 9/16" triangle instead of a handle.

Specifications



Order codes

Triangle width	A	В
3071-T11	11 mm (7/16")	Ø5/8
2071 714	14 (0 /14!!	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \



24h SHIPPING


Gate stop with rubber bumper

GATESTOP

Aluminum gate stop. The rubber stop prevents the gate from being damaged. Height adjustable from 2-1/2" to 5-1/2". Can also be used as a wall stop. Includes anchor bolt.

Specifications

- ✓ Fast and easy installation
- ✓ Height adjustable: min 2-3/8" to 5-1/2" max
- ✓ Aluminum body with rubber stop
- ✓ Included anchor bolt M12 for concrete mounting



Order code

GATESTOP

Including anchor bolt



Keysafe tube mount with Quick-Fix


KEYSAFE QF

Stainless steel Keysafe. Supplied with Quick-Fix to mount inside metal profiles. Used for a safe storage of your spare gate lock keys.

Specifications

- ✓ Keysafe with europrofile cylinder

- ✓ Aluminum housing



Order code

KEYSAFE QF

Including 3012-37-STD-GSZ




Security "break-off" nuts

SECUNUT

Stainless steel anti-theft nuts for security applications.

Specifications

- Stainless steel security nuts for anti-theft applications
- ✓ Available in M6, M8 and M10



Order codes

Order codes	A	В	C	D
SECUNUT-M6	M	3/8"	3/8"	Ø3/8
SECUNUT-M8	M	3 1/2"	7/16"	Ø1/2
SECUNUT-M10	M1	0 11/16	" 9/16"	Ø5/8




3D-PANELFIX SD



Specifications

- ✓ With self-drilling screws



Order code

2D-PANELFIX SD


With self-drilling screws

Fixing for 3D-welded mesh with self-drilling screws



Specifications

- ✓ With self-drilling screws



Order code

3D-PANELFIX SD

With self-drilling screws







Post plug

TC

Polypropylene post plugs.


Color options






Specifications

Ø Polypropylene post plug for square profiles





Gateframe compatibility

For square profiles	For rectangular profiles
TC-4040	
TC-5050	
TC-6060	
	TC-4060

A	В	C	D
1-1/2"		3/16"	3/4"
2"		3/16"	3/4"
2-3/8"		3/16"	3/4"
1-1/2"	2-3/8"	3/16"	3/4"



Post caps

TCR

Polypropylene post caps.


Color options





Specifications

✓ Polypropylene post cap for round profiles



Gateframe compatibility

For round profiles	A B
TCR-42	Ø1-3/4" 1-3/16
TCR-48	Ø2" 1-3/16
TCR-60	Ø2-1/2" 1-1/2"



Square post cap

TCO-STD

Polypropylene post cap. Protects the upper borders of the posts.

Color options




Specifications

- ✓ Polypropylene square post cap for 2-3/8"x2-3/8", 3-1/8"x3-1/8" and 3-15/16"x3-15/16"
- ✓ Protects upper borders of posts

Order codes

For square profiles	
TCO-STD-6060	
TCO-STD-8080	
TCO-STD-100100	

A	В
1-5/8"	2-11/16"
1-5/8"	3-1/2"
1-7/8"	4-5/16"






Post cap to screw on

TCO-SCR

Hot-dip galvanized post caps with screw hole. Perfect to protect / finish your posts. Applications: wood, aluminum or metal.

Specifications

✓ Hot-dip galvanized post caps to screw on



Order codes

For square profiles	A	В
TCO-SCR-HDG-4040	1-11/16"	7/8"
TCO-SCR-HDG-5050	2-1/16"	15/16"
TCO-SCR-HDG-6060	2-1/2"	15/16"
TCO-SCR-HDG-8080	3-1/4"	1"
TCO-SCR-HDG-100100	4-1/16"	1-1/16"
TCO-SCR-HDG-120120	4-13/16"	1-1/8"



Post caps to weld on

TCO-WLD

Zinc-plated post caps to weld on. Perfect to protect / finish your posts. Applications: metal.

Specifications

✓ Zinc plated post caps to weld on



Order codes

Black steel post caps	Zinc-plated post caps	Α	В
TCO-WLD-B-4040	TCO-WLD-Z-4040	1-11/16"	1/2"
TCO-WLD-B-5050	TCO-WLD-Z-5050	2-1/8"	1/2"
TCO-WLD-B-6060	TCO-WLD-Z-6060	2-1/2"	9/16"
TCO-WLD-B-8080	TCO-WLD-Z-8080	3-5/16"	5/8"
TCO-WLD-B-100100	TCO-WLD-Z-100100	4-1/16"	11/16"
TCO-WLD-B-120120	TCO-WLD-Z-120120	4-7/8"	3/4"









Security strip - weld on


PKWB2000

Security strips in black steel to weld on. Packed per 20 pieces of 78-3/4" length.

24h SHIPPING

Specifications

- ✓ Black steel for welding
- ✓ Mounting: weld on
- ✓ Length: 78-3/4"
- ✓ Packed in tubes of 20 pcs 78-3/4" long



Order code

PKWB2000

Security strip to weld on



Security strip to screw on


PKSG2000

Hot-dip galvanized L-security strips to screw on. Packed per 10 pieces of 78-3/4"



Specifications

- ✓ Hot-dip galvanized toothed L-profile
- ✓ Mounting: screw on
- ✓ Length: 78-3/4"
- ✓ Easy to retrofit
- ✓ Packed in tubes of 10 pcs 78-3/4" long



Order code

PKSG2000

Security strip to screw on




Electrogalvanized security strips to weld on

PKWB2000-EP

Electrogalvanized security strips to weld on. Packed per 20 pieces of 78-3/4".

Specifications

- ✓ Mounting: weld on
- ✓ Length: 78-3/4"
- ✓ Packed in tubes of 20 pcs 78-3/4" long



Order code

PKWB2000-EP

Security strip to weld on





Sales support tools

Convince your clients of the Locinox quality. We developed several gate displays and democases of our best selling products. Every featured Locinox product is full-scale and functioning just like in real-life.

These handy sales support tools perfectly claim what Locinox is standing for: exceptional quality, good value, extreme durability, user friendly comfort, easy installation, and much more. Let the lightweight gate displays and complete democases be your closest ally during sales visits or showcase them in your showroom. They will be an eyecatcher and make your sales talks much easier, believe us.



184 Democases

185 Gate displays



NEW

Democase with a range of Locinox hinges

DEMO-HINGES



Sturdy, high quality and handy demo case with a range of weatherproof hinges.

Specifications

- ✓ Includes following hinges: GBM 12-DP, SWING40, G90LR, GBMU4D20, BOLTON4D, 1DBH, 3DM and PUMA
- ✓ Includes following U-shaped ear plates: 1001, 1036 and 1041
- ✓ Includes 1034-A2 eyebolt set
- ✓ Includes 1034ROLL-HDG eyebolt
- ✓ Includes GRIP fixation grip

Order code

DEMO-HINGES Democase with a range of Locinox hinges



NEW

Democase with a range of Locinox locks and SlimStone keypad

DEMO-LOCKS

Sturdy, high quality and handy demo case with a range of weatherproof locks and the SlimStone keypad.

Specifications

- ✓ Includes following gate locks: LAKQ U2, LPKQ U2 en LFKQ X1
- ✓ Includes following keeps: Modulec SH, SAKL en SHKL
- ✓ Includes the SlimStone keypad
- ✓ Miscellaneous: PB-1, DC-POWER-12V/20W, GATESWITCH

Order code

 $\textbf{DEMO-LOCKS} \quad \text{Democase with a range of Locinox locks and SlimStone keypad}$



NEW

Democase with a range of Locinox handles and drop bolts

DEMO-DROPBOLTS

Sturdy, high quality and handy demo case with a range of handles and drop bolts.

Specifications

- Includes following handles: 3006D, 3006M, 3006FA, 3006J, 3006P, 3006G, 3006KR, PUSH, KIDLOC-2 and 3012-POC-T11 (+14, 17)
- ✓ Includes EGS ground catcher
- ✓ Includes VSF and Keydrop drop bolts
- ✓ Includes LAKQ U2 gate lock

Order code

DEMO-DROPBOLTS Democase with a range of Locinox handles and drop bolts





185



NEW

Access control gate diplay with Modulec strike, SlimStone keypad and Tiger gate closer

PS SLIMSTONE-TIGER

Access control gate display with SlimStone keypad (IP 68), Modulec electric strike and the hydraulic Tiger gate closer.

Specifications

- ✓ High quality and lightweight aluminum display
- ✓ Information panel in 4 languages

Order code

PS_SLIMSTONE-TIGER

Access control gate diplay with Modulec strike, SlimStone keypad and Tiger gate



NEW

Gate display Tiger gate closer and industrial lock

PS_TIGER-

Aluminum gate display featuring the Tiger hydraulic gate closer with the industrial lock and stainless steel keep.

Specifications

- ∀ High quality and lightweight aluminum display
- ✓ Information panel in 4 languages

Order code

PS_TIGER- Gate display Tiger gate closer and industrial lock



NEW

Gate display with Rhino gate closer, industrial lock and Bolton4D hinge

PS RHINO-

Aluminum gate display featuring the Rhino hydraulic gate closer with the boltable 180° Bolton4D hinge, an industrial lock and a stainless steel keep.

Specifications

- ∀ High quality and lightweight aluminum display
- ✓ Information panel in 4 languages

Order code





NEW

Gate display with Lion gate closer, industrial lock and 90 $^{\circ}$ hinge

PS_LION-



Aluminum gate display featuring the Lion hydraulic gate closer with a hot-dip galvanized 90° hinge, an industrial lock and a stainless steel keep.

Specifications

- ✓ High quality and lightweight aluminum display
- ✓ Information panel in 4 languages

Order code

PS_LION- Gate display with Lion gate closer, industrial lock and 90° hinge



Radio with AUX jack

RADIO

Portable rechargeable site radio. Shock- and waterproof. A nice gadget for your fencing installers.

Specifications

- Shock- and waterproof
- ✓ Power: 10 Watt
- ✓ AUX-jack
- ✓ Chargeable batteries included

Order code

RADIO Portable site radio with chargeable batteries included





#WE ARE LOCINOX



Innovation as the engine of your growth



MODULARITY

Designed with flexibility at every moment



ADDED VALUE

High quality to ensure your peace of mind



it suits you



Exceptional after-sales service



Sustainable solutions in the very long term



A sincere and clear communication, day after day



Our promises and deadlines are always met



Long-term relationships and a win-win situation for everyone









Driven by people







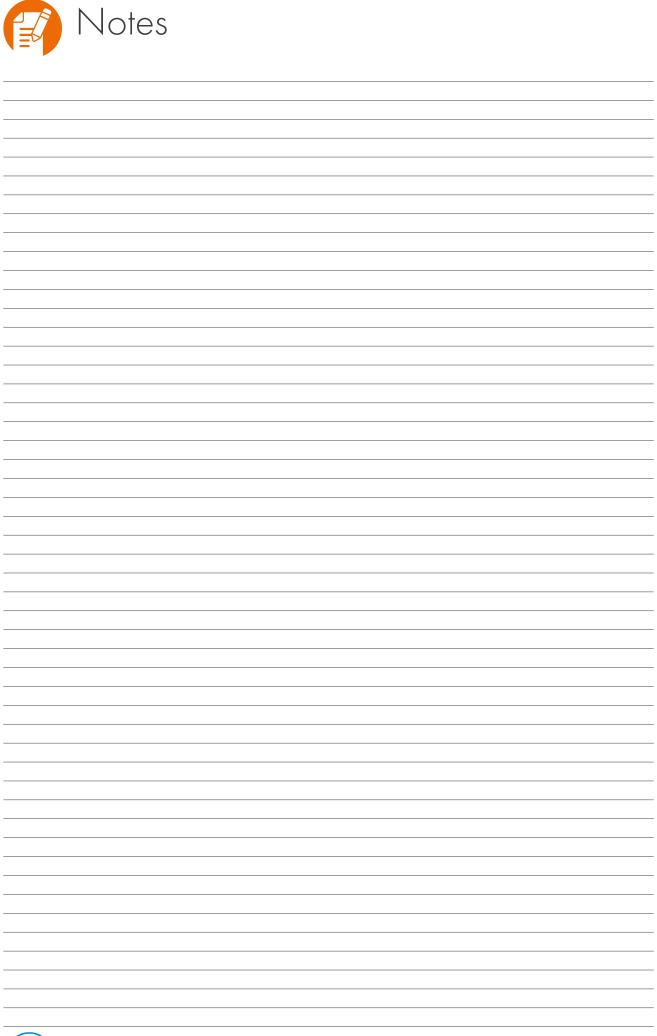





Table of contents

1DBH-	127	3970USA	150
2D-PANELFIX SD	178	3970LS	150
3DM	127	6403	168
3D-PANELFIX SD	178	ABK	146
3DW	128	ABL	146
4DFIX-I	117	AC-TRANS-12V-25W	45
4DFIX-I-12	117	bearing hinge	126
4DW	128	B-MAG-	31
1001 U	116	BOLTON4D-	109
1002B	123	BOLTON-G-	110
1002M	116	BOLTON-U-	110
10040rna	123	CGS	142
1005WP	124	CLB-MAMMOTH	172
1005WPF	124	CLB-TIGER	172
1005WPU16	124	DC-ACCESS-12V-20W	46
1034A2-	115	DC-POWER-12V-20W	46
1034HDGA-	114	DC-POWER-24V-25W	46
1034ROLL-HDG-	115	DEMO-DROPBOLTS	184
1036	121	DEMO-HINGES	184
1039SET	121	DEMO-LOCKS	184
1040HDSM 16-	134	DINO	126
1040TPS-M 12-	134	DRILL-FIX	151
1041-01	133	DRILLØ 15	150
1127	121	DRILLVISE-II	155
2005	45	DRILLVISE-IV	155
3006C	164	DURA	133
3006D	165	DVK	44
3006FA	165	DVK-HD	45
3006G	165	EGS	143
30061	165	ELECTRADROP	42
3006J	164	FIFTYLOCK	81
3006KR	161	FORTYLOCK	80
3006M	164	G90LR	119
3006P	166	G90WP	120
3006PC	94	G90Z	119
3006PULL	161	GAM12	133
3006PUSH	162	GATESTOP	177
3006R	166	GATESWITCH	47
3006R-2	167	GBM 12	131
3006S	164	GBM 12-DP	131
3006711	163	GBM16	132
3012-37-STD	175	GBM16-DP	132
3012-46-STD	174	GBMU4D12	112
3012-54-DSA	175	GBMU4D16	112
3012-54-STD	174	GBMU4D20	113
3012-60-KNOB	176	GBMU4DSHIELD	113
3012-60-STD	174	GBMU	114
3012-80-STD	174	GDP	125
3012-POC-	174	G-ORNA-LR	123
3018LA	168	G-ORNA-WP	122
3018MOD-	170	GP-U-BASE	125
3019LA	168	GRIP 12	118
3020-HYB	86	GRIP16	118
3070-46	175	GRIP20	118
3070-40	175	H-COMPACT	87
3071-	175	HKT	102
JU/ I-	1/0	LINI	102




HLT	85	QF-EXP	156
H-METAL	83	QUICK-FIX	156
H-METAL-WB	84	RADIO	186
HWKB	102	RHINODRILL	153
HWLB	85	RHINO	19
H-WOOD	89	ROLLTOP	157
IGC	147	SAKL QF	95
KEYDROP	140	SAMSON-2	17
KEYSAFE QF	177	SB-	171
KIDLOC-2	167	SECUNUT	177
KIDLOC	161	SEH	28
KLAUW-	117	SE	28
KLAUW 12	116	SFKB	104
LAKQ H2	71	SFKI	104
LAKQ U2	59	SFKM	105
LAKQ U3	60	SFKP	105
LAKY F2	70	SHIELD-SA-	170
LAKZ P1	72	SHIELD-SH-	170
LAKZ P1 WSI	73	SHKC	103
LDKZ D1	65	SHKL QF	95
LEKQ U4	68	SHKM	101
LFKQ X1	67	SHKW	103
LGKZ D1	79	SIXTYLOCK	82
LIKQ U2	69	SKRZ	96
LION	18	slimstone-	26
LION-VTC-DRILL	154	SLIMSTONE-2-	27
LLKZ V2	76	S-MAG-	36
LMKQ V2	66	SMKL QF	96
LOCITOOL LA	157	SPKZ QF	97
LOCITOOL LB	157	SPKZ-TK	97
LPKQ U2	63	SSKZ QF	98
LR	123	STK QF	99
LSKZ U2	78	STR60 QF	99
LUKY J5	61	SUBY	138
MAG	38	SWING40	130
MAGMAG	39	TC	179
MAGUNIT-2500	32	TCO-SCR	180 179
MAMMOTH-180 MODULEC-SA	15 29	TCO-STD TCO-WLD	180
MODULEC-SH	29	TCR	179
MRT-118	176	TIGERDRILL	152
N-LINE-B-MAG-	33	TIGER	14
N-LINE-B-MAG-KIT-	34	TRICONE	43
N-LINE MAG	40	TT-BM3S	53
N-LINE MAG KIT-2500	41	TT-BSP / TT-SSP	53
N-LINE-S-MAG-	33	TT-CL1	55
OGS	142	TT-DM3	53
O-SET	98	TT-FC31	54
PB-1	44	TT-FO31	54
PKSG2000	181	TT-MM3S	54
PKWB2000	181	TT-PIVOT	55
PKWB2000-EP	181	TT-SAH	55
PS_LION-	186	TURNITEC	52
PS_RHINO-	185	TWIST40	74
ps_slimstone-tiger	185	UGC	147
PS_TIGER-	185	VERTICLOSE-2-	21
PUMA	130	VERTICLOSE-2-WALL-	22
PUSHBAR-H-	162	VSA / VSF	141
PUSHBAR-L-	163		



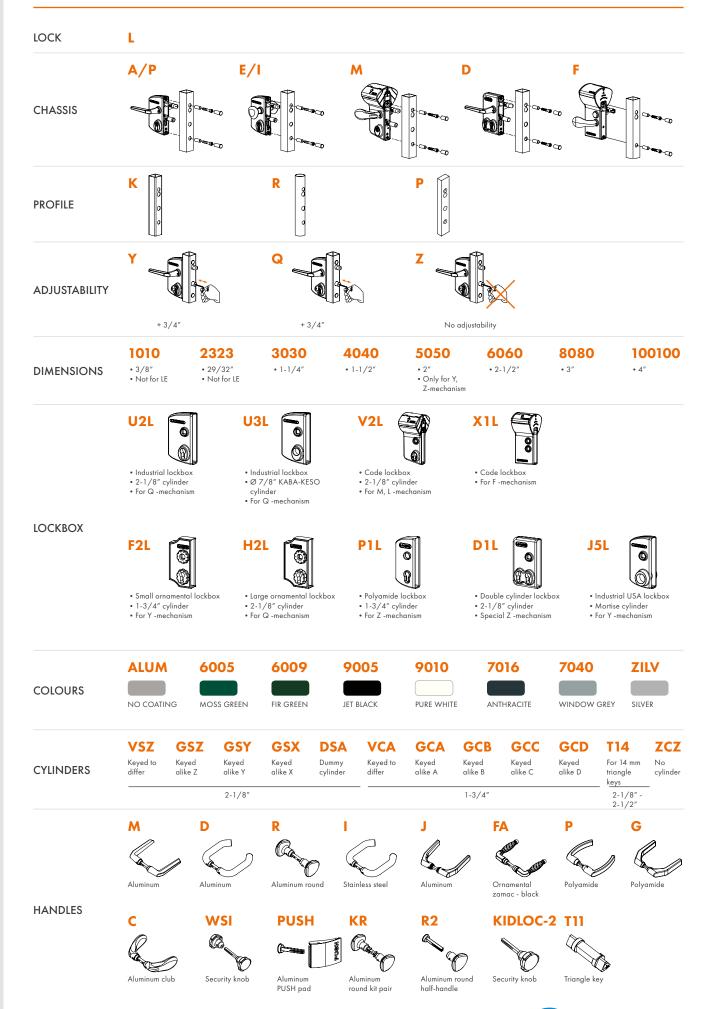

(LOCINOX)

CODEBUILDER FOR SLIDING GATES LS - LL - LG

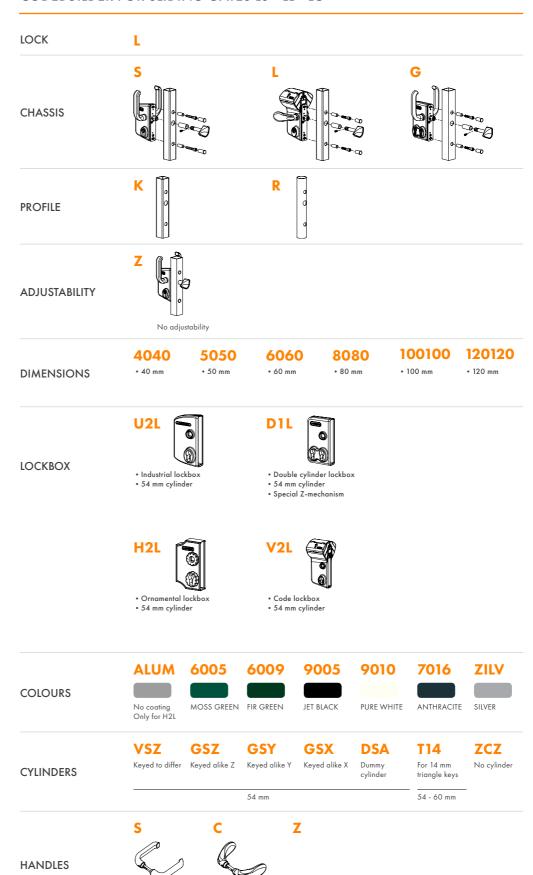

No handles

Aluminium reinforced

Aluminium club







LOCINOX NV

Mannebeekstraat 21 8790 Waregem — Belgium

T. +32 (0)56 77 27 66 F. +32 (0)56 77 69 26 E. info@locinox.com www.locinox.com

Locinox P - English



