


Salice Full Extension

→ A7555 Futura 16



soft&silent)))

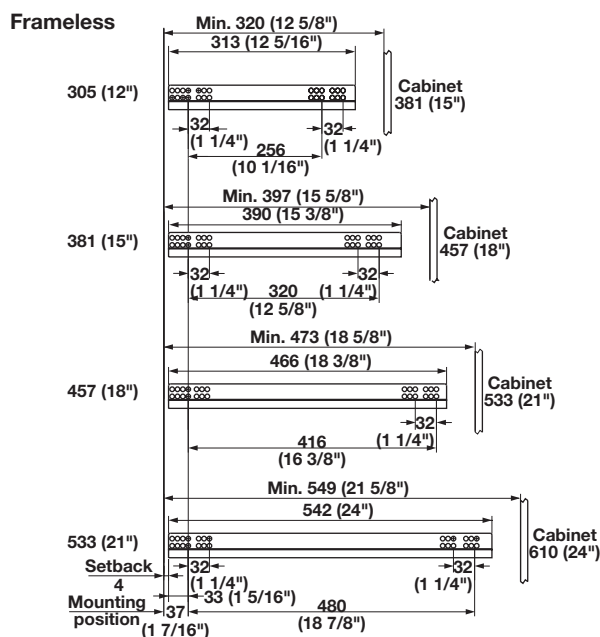


- > Dynamic weight capacity: 35 kg (75 lbs.)/pair
- > Integrated soft close with 52 mm (2 1/16'') closing range
- > Meets or exceeds BHMA grade 1 testing requirements
- > Slotted hole for depth adjustment
- > Front clips disconnect for easy drawer insertion and removal
- > Material: Steel; Finish: zinc-plated

Slide length	Drawer box length	Item No.
266 (10 1/2'')	229 (9'')	433.17.723
313 (12 5/16'')	305 (12'')	433.17.730
390 (15 3/8'')	381 (15'')	433.17.738
466 (18 3/8'')	457 (18'')	433.17.745
542 (21 3/8'')	533 (21'')	433.17.753

Note

Face frame add rear bracket with minimum cabinet depth 6–45 mm (1/4"–1 3/4")

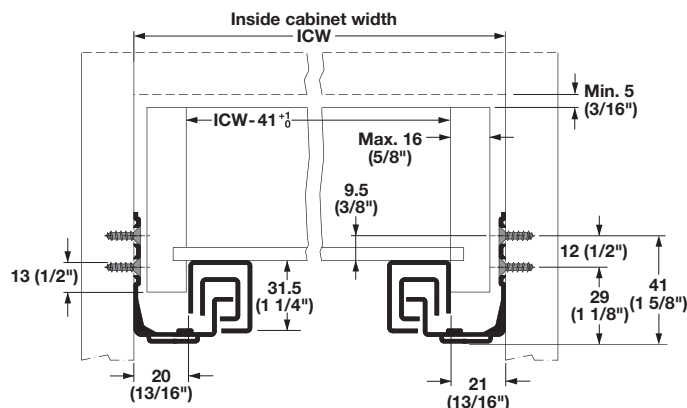


Drawer Side Thickness: Minimum: 12 mm (1/2'')

Maximum: 16 mm (5/8'')

Maximum Drawer Height = Opening minus 25 mm (1'')

Drawer side thickness	16 (5/8'')	15 (19/32'')	14 (9/16'')	13 (1/2'')	12 (15/32'')
Deduct from ICW	9 (3/8'')	11 (7/16'')	13 (1/2'')	16 (5/8'')	17 (21/32'')

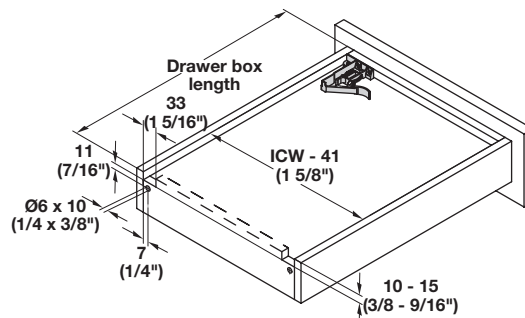

→ Clips, required



> Material: Plastic

Color/Version	Item No.
gray/height adjustable	421.23.000
orange/6 way adjustable	421.23.001

Supplied With
Right/left clips

→ Rear Face Frame Mounting Brackets, optional



> Material: Steel; Finish: zinc-plated

Version	Item No.
Standard	433.17.000
Narrow	433.17.001

Note 2 pcs. required (for 1 pair of slides).

Flat head screws

pages 12.7-12.8, 12.10, 12.13

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.