


### EKU Libra 20 H Synchro

Maximum door height: 1000 mm (39 3/8")  
 Maximum door width: 1600 mm (63")  
 Minimum door thickness: 16 mm (5/8")  
 Minimum side panel thickness: 16 mm (5/8")  
 For doors weighing up to 20 kg (44 lbs.) each


- For 2 wood doors that are synchronized
- All hardware is surface mounted

#### Note




In general, doors should be the same size, and must weigh the same as they need to counter balance each other.

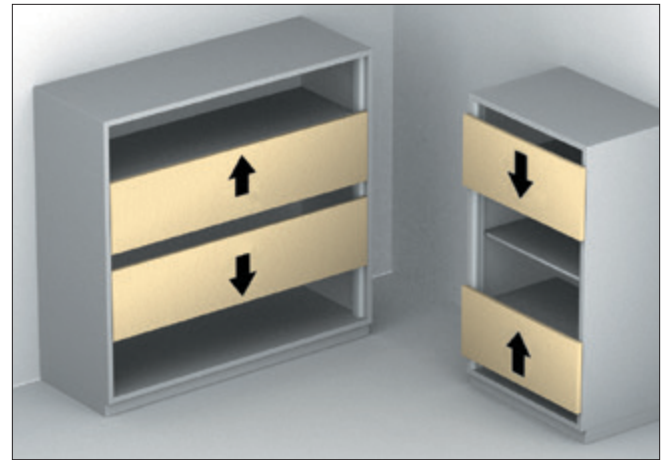

Inside doors

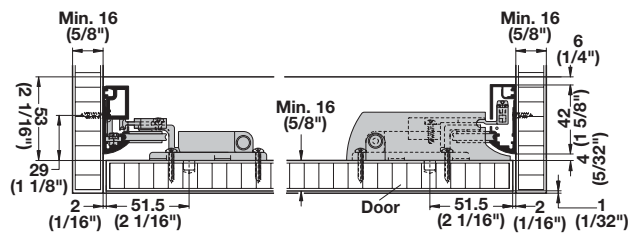

Forslide doors

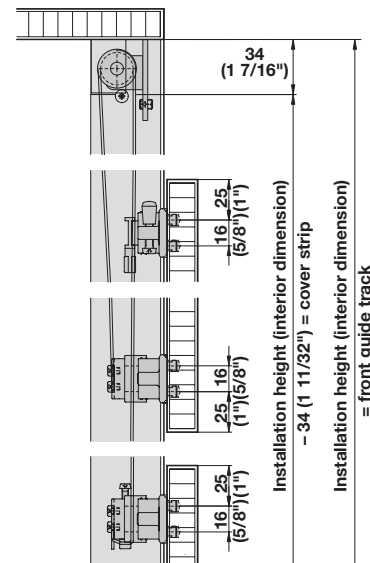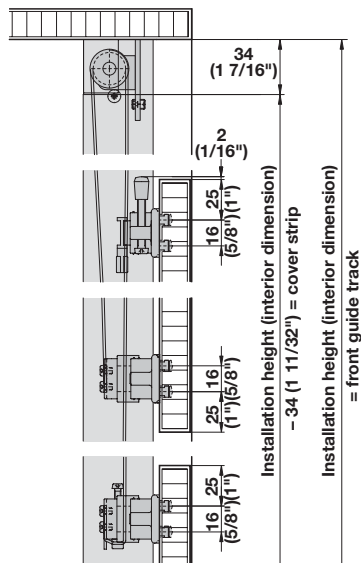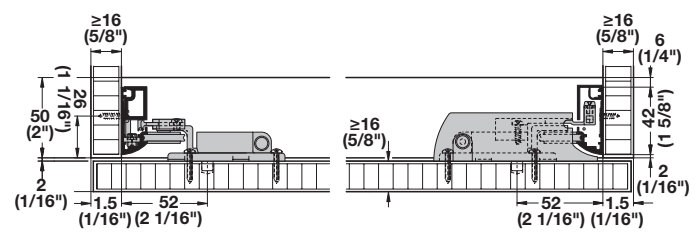










### EKU Libra 20 H Synchro Set

	Item No.
For 2 sliding doors	403.20.010



#### Note

Please order front guide track, back guide track, and cover strip separately (see below).

### Set Components

	Description	Material	Finish/Color	Qty.
	Sliding hardware with cam adjust	Plastic	light gray	4 pcs.
	Sliding hardware with spring	Plastic	light gray	4 pcs.
	Reverse roller, front	Plastic	light gray	1 pair
	Door safety	Zinc die-cast	zinc-plated	2 pcs.
	Rope bracket	Zinc die-cast	zinc-plated	4 pcs.
	Tightening bolt for rope bracket	Zinc die-cast	zinc-plated	2 pcs.
	Rope 1.5 x 3500 mm (1/16" x 11' 5 13/16")	Kevlar	blue	2 pcs.
	Cover cap	Plastic	light gray	1 pair
	Cover for sliding hardware	Plastic	light gray	4 pairs

### Individual Components

	Description	Material	Finish	Item No.
	Front guide track, 2.5 m (8' 2 7/16") Requires wood screws	Aluminum	silver anodized	403.21.902
	Clip-on cover strip, 2.5 m (8' 2 7/16")	Aluminum	silver anodized	403.22.902