

Regular Arm
Installation
See Page 2




CAUTION


An incorrectly installed or improperly adjusted door closer can cause property damage or personal injury. These installation instructions should be followed to avoid the possibility of misapplication or misadjustment.

CAUTION

Regular Arm
Installation
See Page 2

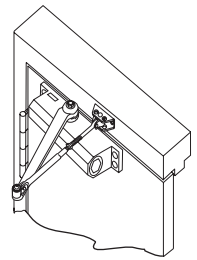


Right Hand Door - RH
Left Hand Reverse - LHR

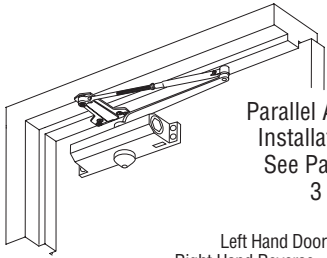


Parallel Arm
Installation
See Pages
3 & 4

Left Hand Door - LH
Right Hand Reverse - RHR

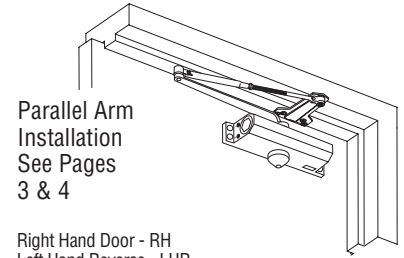


Parallel Arm
Installation
See Pages
3 & 4

Right Hand Door - RH
Left Hand Reverse - LHR

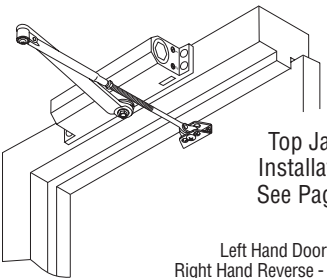

Top Jamb
Installation
See Page 5

Left Hand Door - LH
Right Hand Reverse - RHR

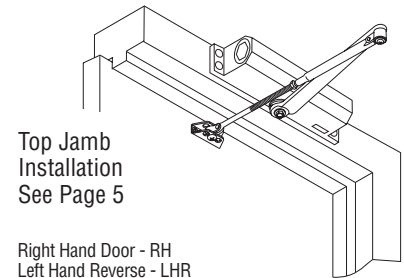

Top Jamb
Installation
See Page 5


Right Hand Door - RH
Left Hand Reverse - LHR

NOTE: For special applications, a separate door and frame preparation template is packed with these instructions. Use this instruction sheet for installation sequence and closer adjustments only.

- Dimensions are based on standard doors and frames with 1/8" clearance, 5/8" stops, and square edge doors.
- Door and frame must be properly reinforced.
- Non-Handed Door Closers.


NOTE: For Top Jamb Application

A longer connecting rod is required for reveals greater than 3" (76mm)




- These door closers should **NOT** be installed on the exposed side (weather side) of exterior doors.


TOOLS REQUIRED

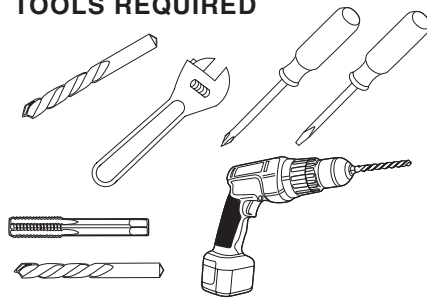

METAL

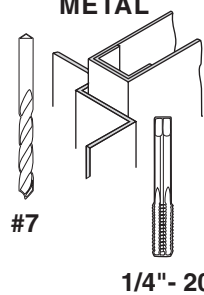

WOOD

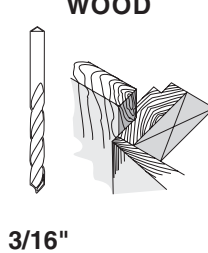

Self Drilling Screws Wood and Metal

For wood, drill 3/16" hole

Machine Screws

#7 Drill, 1/4"-20 Tap




Sleeve Nut and Bolt



Drill 9/32" thru from Closer Side
3/8" Drill other Side


Check building and fire codes to see if your application requires the use of sleeve nuts and bolts.

COMPONENT PARTS

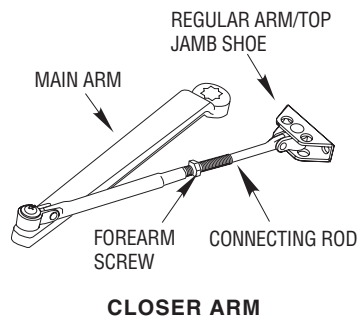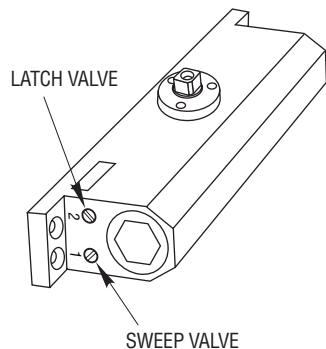


5400 Series Non-Hold Open Door Closer - Regular Arm Installation Instructions

1. PARTS

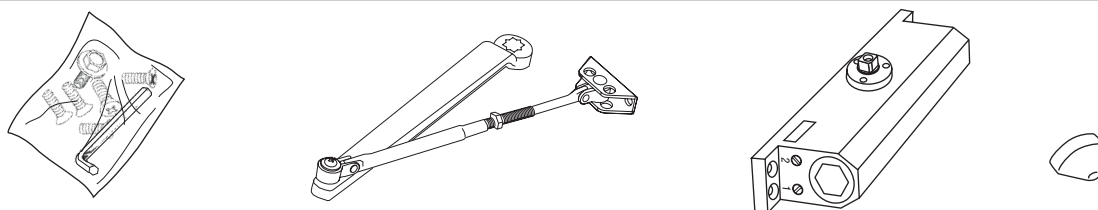

2. MARK AND DRILL HOLES (Right Hand Shown)

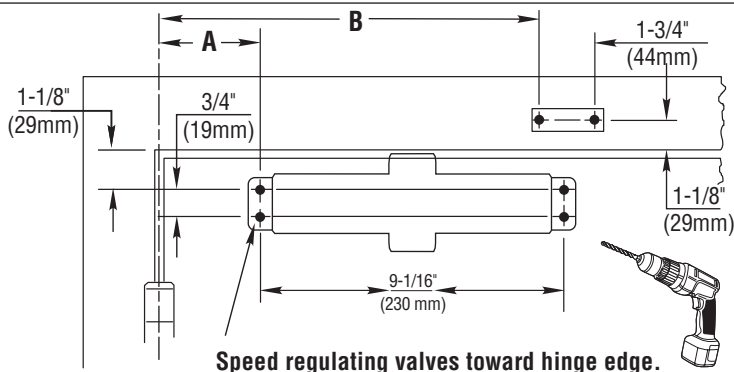


For Opening to 120		For Opening 121 to 180	
A	B	A	B
5-1/2" (140mm)	12" (305mm)	4-1/16" (103mm)	10-9/16" (268mm)

Dimensions apply to "all sizes".


Select hand of door and degree of door opening. Fold template on the corresponding line for desired degree of door opening and hand. Match this line with the hinge edge and door and attach template to door. Be sure frame line on template lines up with the bottom edge of frame face. Mark, prep and drill/tap 1/4" - 20 holes for closer body and jamb shoe mounting screws.

3. INSTALL CLOSER

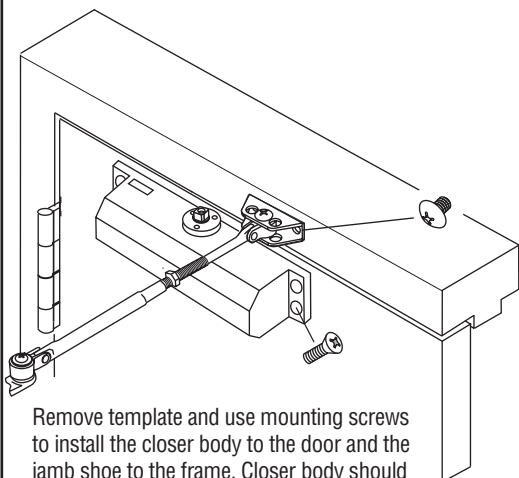


Remove template and use mounting screws to install the closer body to the door and the jamb shoe to the frame. Closer body should be oriented so that the speed regulating valves are toward the hinge stile of door.

4. INSTALL MAIN ARM

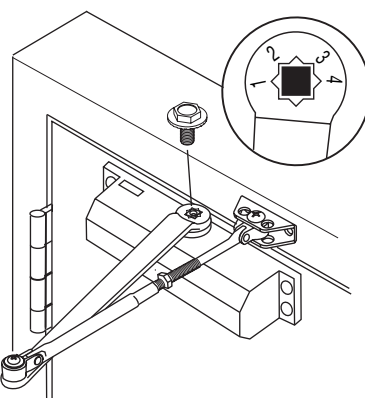


Orient main arm so that the "1", located on the main arm, is on the same side of the closer as the speed regulating valves. The main arm will point out away from the door.

5. INSTALL MAIN ARM AND CONNECTING ROD

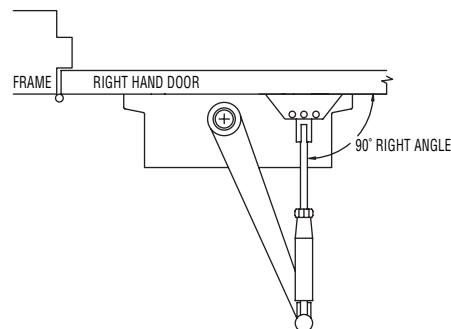

Screw connecting rod into forearm of main arm. Rotate main arm until connecting rod is at a 90° angle to frame. While holding arm in this position, tighten down forearm screw.


6. ADJUSTMENTS

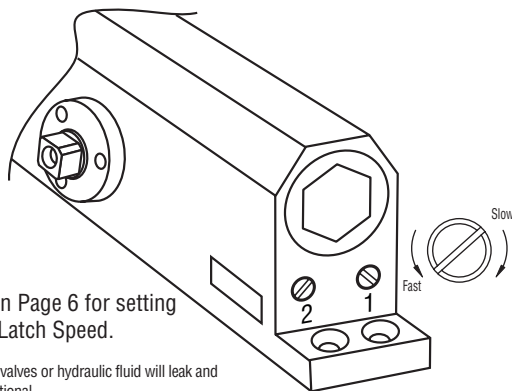

See Adjustments on Page 6 for setting Sweep Speed and Latch Speed.

NOTE: Do not fully unscrew valves or hydraulic fluid will leak and closer will no longer be functional.


7. INSTALL PINION CAP

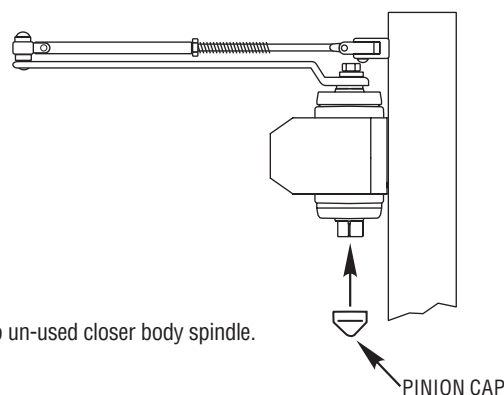


Press pinion cap onto un-used closer body spindle.

5400 Series Non-Hold Open Door Closer - Parallel Arm Installation Instructions

1. PARTS

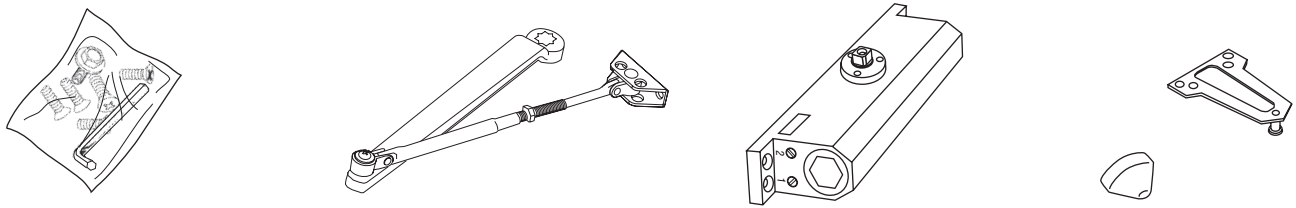


2. MARK AND DRILL HOLES (Right Hand Shown)

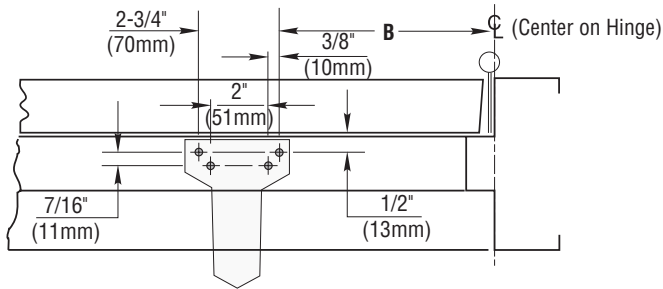


Select hand of door and the degree of door opening. Fold template on the corresponding line for desired degree and hand. Fold or cut upper corner illustrated on template and align template with the hinge edge of door. At the "Frame Stop Line" fold toward you and attach template to door. Mark, prep and drill/tap 1/4"-20 holes for closer body and parallel arm bracket mounting screws.

For Opening to 120		For Opening 121 to 180	
A	B	A	B
7-15/16" (202mm)	9-1/16" (230mm)	6-9/16" (167mm)	7-11/16" (195mm)


Dimensions apply to "all sizes".

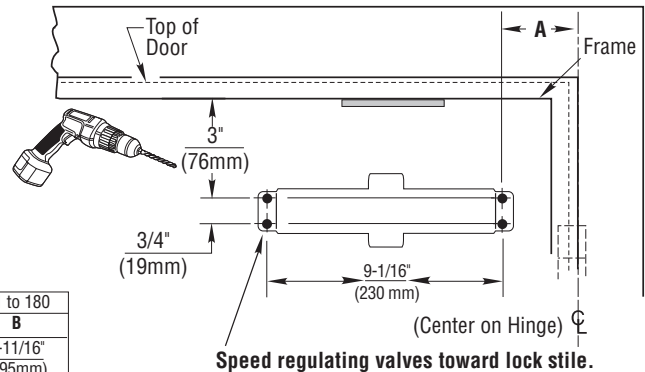


3. INSTALL CLOSER

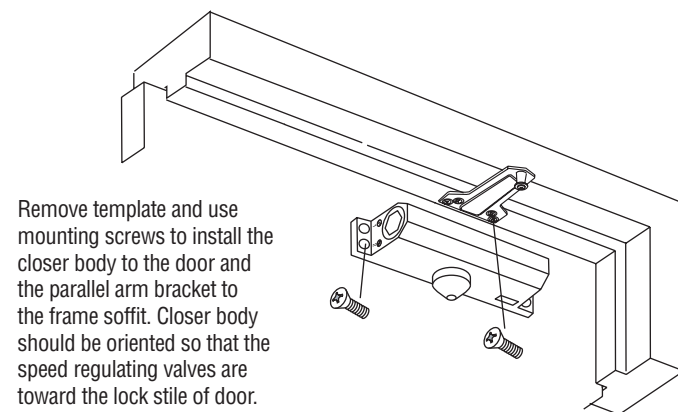

4. INSTALL CONNECTING ROD

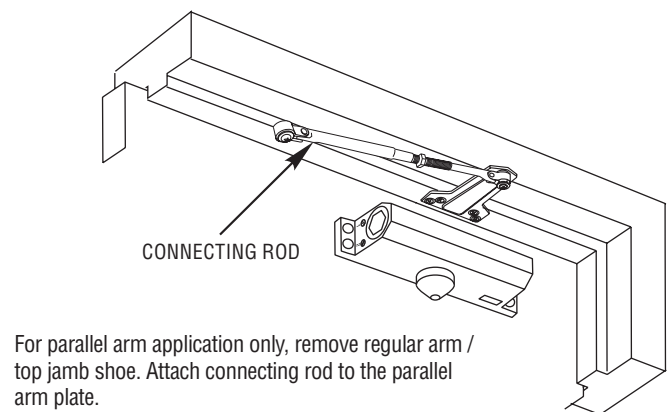


5. INSTALL MAIN ARM

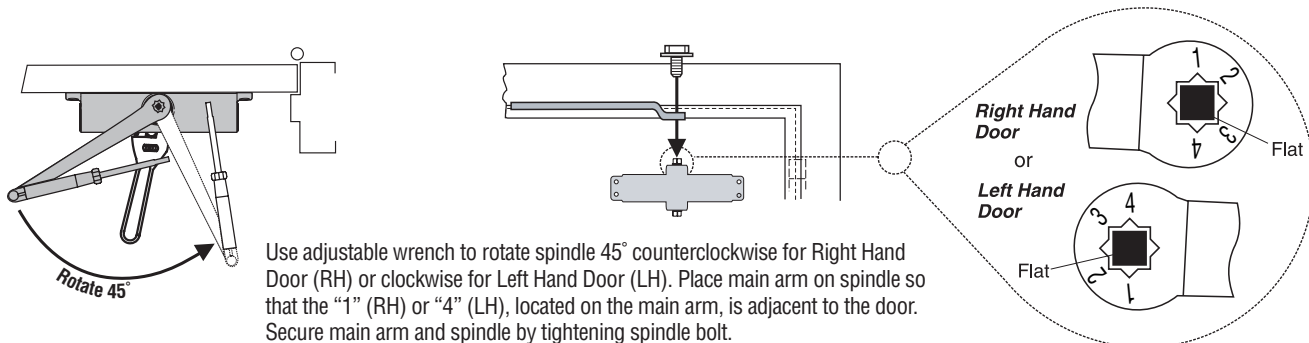


6. INSTALL MAIN ARM AND CONNECTING ROD

a)

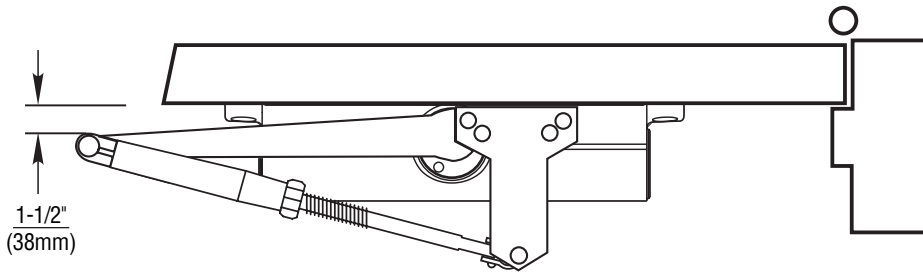


Screw connecting rod into forearm of main arm until pivot point is 1-1/2" from door surface.

b)

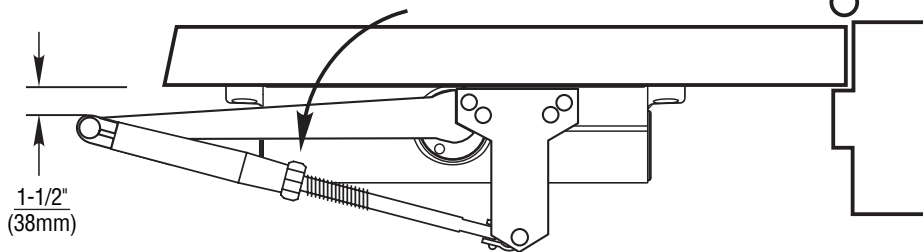

While holding arm in this position, tighten down forearm screw.


7. ADJUSTMENTS

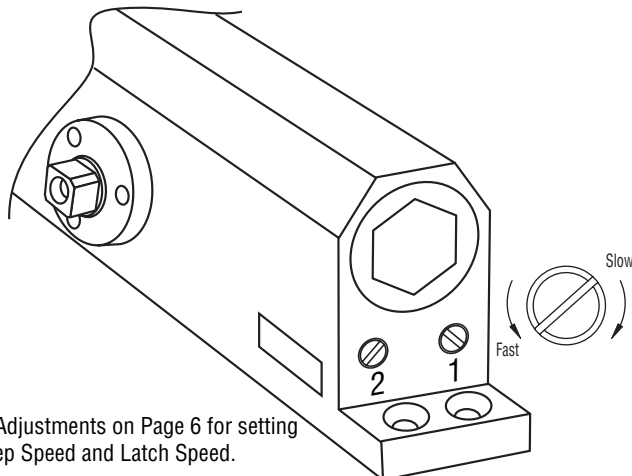

See Adjustments on Page 6 for setting Sweep Speed and Latch Speed.

NOTE: Do not fully unscrew valves or hydraulic fluid will leak and closer will no longer be functional.


8. INSTALL PINION CAP

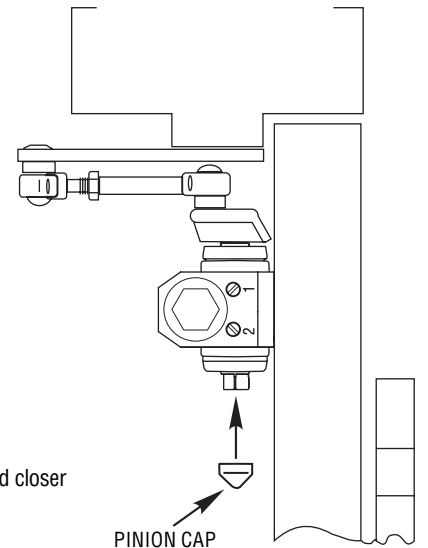


Press pinion cap onto un-used closer body spindle.

5400 Series Non-Hold Open Door Closer - Top Jamb Arm Installation Instructions

1. PARTS

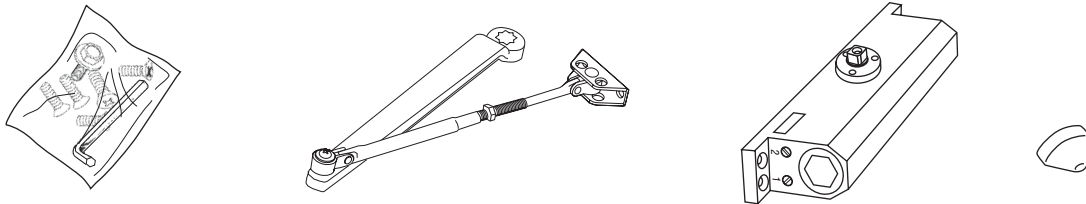


2. MARK AND DRILL HOLES (Right Hand Shown)

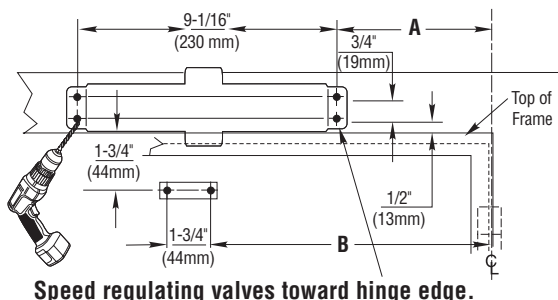

For Opening to 120		For Opening 121 to 180	
A	B	A	B
5-5/8" (143mm)	12-1/8" (308mm)	3-7/16" (87mm)	9-15/16" (252mm)


Dimensions apply to "all sizes".

A longer connecting rod is required for reveals greater than 3" (76mm)




Select hand of door and the degree of door opening. Separate template sections "A" and "B". Fold template on the corresponding line for desired degree and hand. Match this line with the hinge edge of door and attach template to door. Be sure "Frame" line on template lines up with the top edge of door. Using a square, project "Closer Projection Line" on section "A" of template onto frame and use to align and attach section "B". Be sure to align bottom edge of section "B" with edge of frame. Mark, prep and drill/tap 1/4" - 20 holes for connecting rod shoe and closer body mounting screws.

3. INSTALL CLOSER

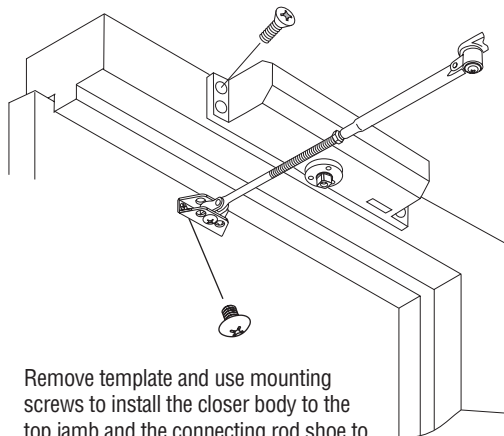


Remove template and use mounting screws to install the closer body to the top jamb and the connecting rod shoe to the door. Closer body should be oriented so that the speed regulating valves are toward the hinge stile of door.

4. INSTALL MAIN ARM

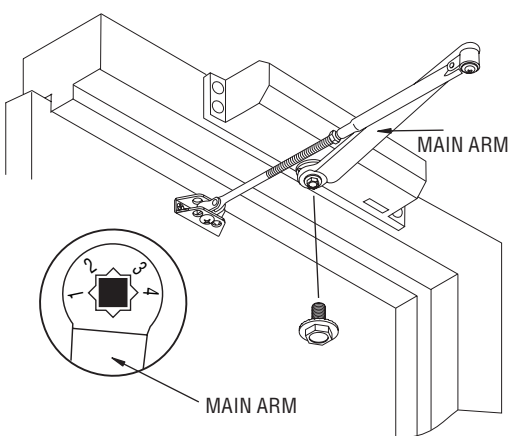


Orient main arm so that the "4", located on the main arm, is on the same side of the closer as the speed regulating valves. The main arm will point out away from the door.

5. INSTALL MAIN ARM AND CONNECTING ROD

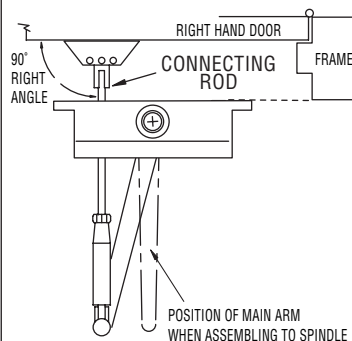

Screw connecting rod into forearm of main arm. Rotate main arm until connecting rod is at a 90° angle to frame. While holding arm in this position, tighten down forearm screw.


6. ADJUSTMENTS

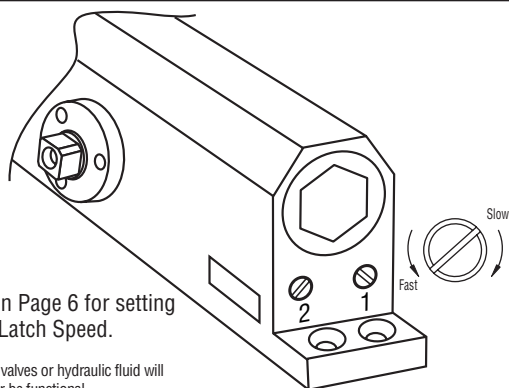

See Adjustments on Page 6 for setting Sweep Speed and Latch Speed.

NOTE: Do not fully unscrew valves or hydraulic fluid will leak and closer will no longer be functional.

7. INSTALL PINION CAP

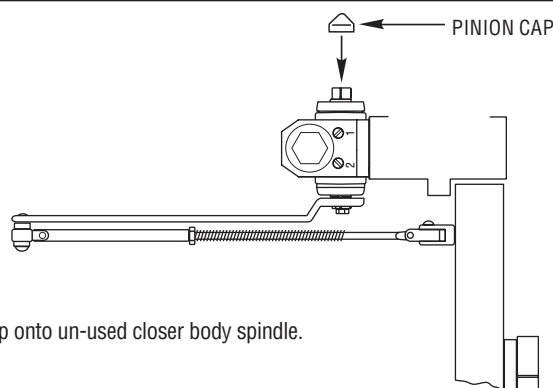


Press pinion cap onto un-used closer body spindle.

5400 Series Non-Hold Open Door Closer - Adjustments Installation Instructions


ADJUSTMENTS (USE SCREWDRIVER FOR THESE ADJUSTMENTS)

SWEEP SPEED

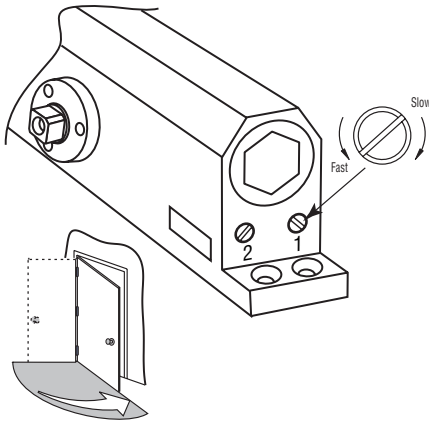


Note: Adjust closing time speed to between 3 and 7 seconds from 90° to 0°. Greater closing times may be required for elderly or handicapped.

LATCH SPEED

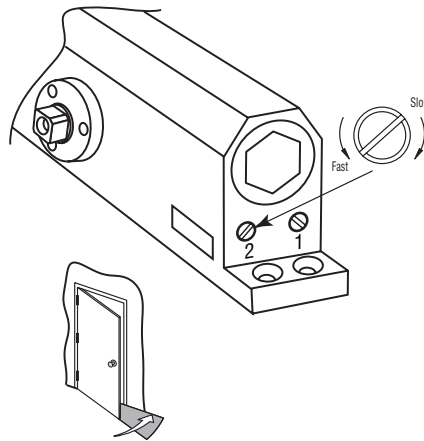

Adjust latch speed so door completely closes and latches.

OPTIONAL BACKCHECK

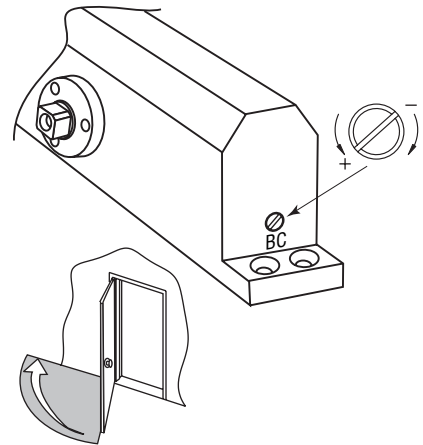

Adjust backcheck accordingly to prevent excessive opening speed.

SPRING POWER ADJUST

TABLE OF SIZES

Closer is available in sizes 2, 3, 4 and 5. The chart on the right shows the recommended door and closer size.

Exterior (and Vestibule) Door Width

Minimum Door Width (24")

24" - 30" - 36" - 42"
(610mm) (762mm) (914mm) (1067mm)

Regular Arm &
Top Jamb

Size 3	Size 4	Size 5
Size 4	Size 5	

Parallel Arm

Interior Door Width

Minimum Door Width (24")


24" - 30" - 34" - 38" - 48" - 54"
(610mm) (762mm) (865mm) (965mm) (1219mm) (1372mm)

Regular Arm &
Top Jamb

	Size 2	Size 3	Size 4	Size 5
Size 2	Size 3	Size 4	Size 5	

Parallel Arm

ADJUSTMENT DIAGRAM

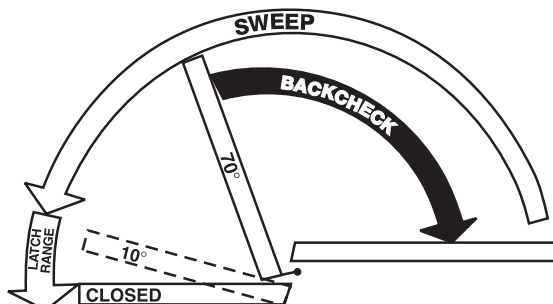

ARM PLACEMENT IN SHOE

