




**TRADEMARK
HARDWARE**

WORLD OF QUALITY HARDWARE



INSTALLATION

CONTENTS	9673	9674
1. TRACK (9820)	1	1
2. CARRIER	4 (9605)	4 (9606)
3. QUICK RELEASE PLATE (9610)	1	1
4. FLOOR GUIDE (9353)	1	2
5. #8 X 5/8" PTHS	16	16
6. #8 X 3/4" PPHS	2	2
7. #8 X 1-1/2" PPHS	3	3
8. #8 X 1" PPHS	16	16
9. DOORSTOP (9880)	1	1
(sold separately)		
10. PULL	2	2
(Sold separately)		

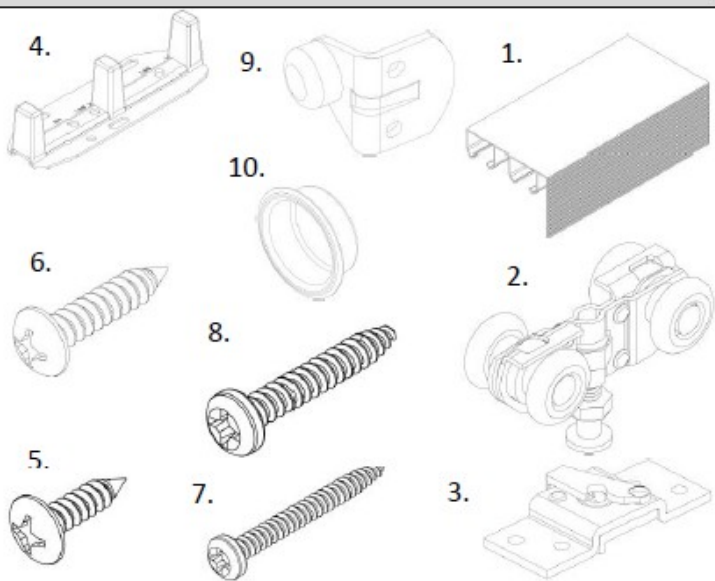

1 PREPARE OPENING

OPENING HEIGHT MAX = DOOR HEIGHT + 2-1/2"
OPENING HEIGHT MIN = DOOR HEIGHT + 2-1/4"

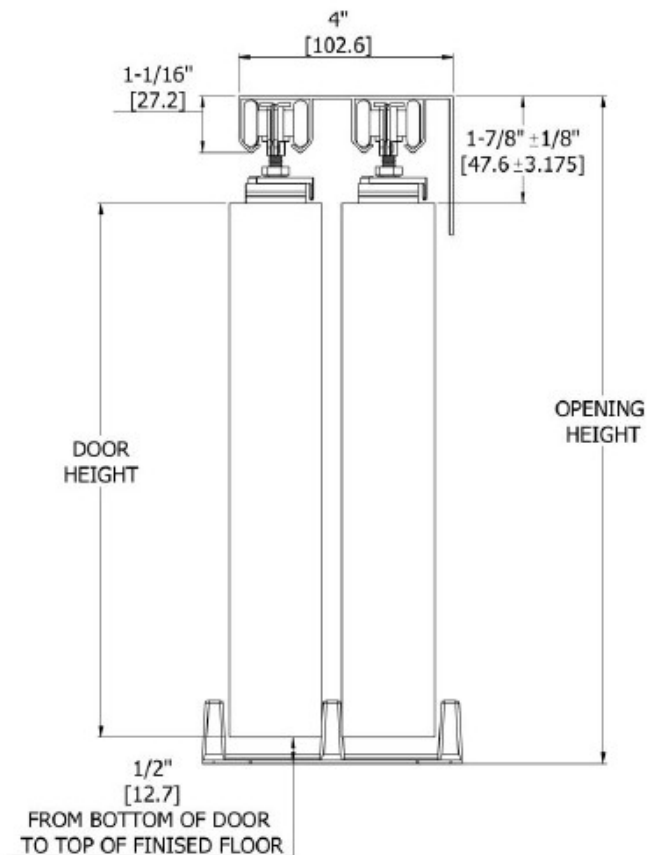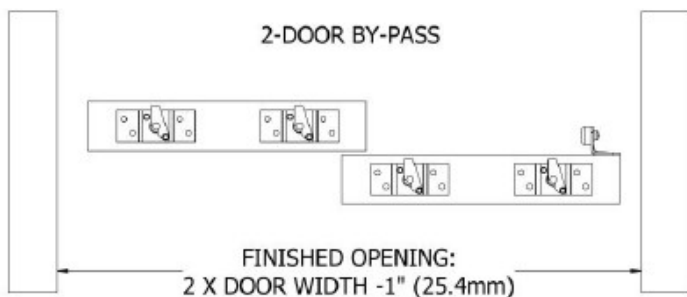

SKU: H9673



www.tmhardware.com



845-388-1300



845-388-1388



sales@tmhardware.com





**TRADEMARK
HARDWARE**

WORLD OF QUALITY HARDWARE

INSTALLATION


2 INSTALL TRACK AND HANGERS

- Center track in opening and secure with (#8 x 5/8") screws
- Leave a 1" gap between right end of track and door frame to allow for carrier removal
- Center quick release plates on door thickness
- Mount left plate edge 1" from near left door edge
- Mount right plate edge 2-3/4" from right door edge
- Secure Carriers onto door with (#8 x 1") screws

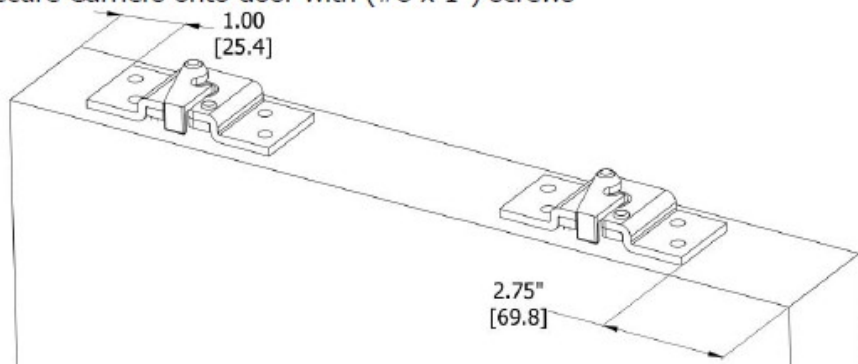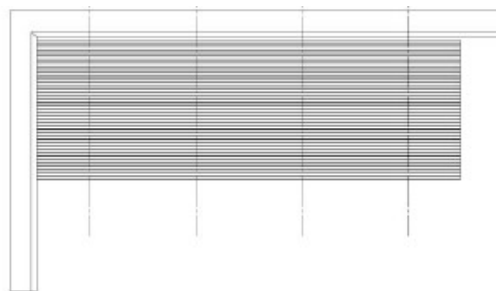


3 HANG DOORS

- Open quick release latches on brackets
- Slide door onto carrier screws and close hatch
- Repeat for front door on front rail

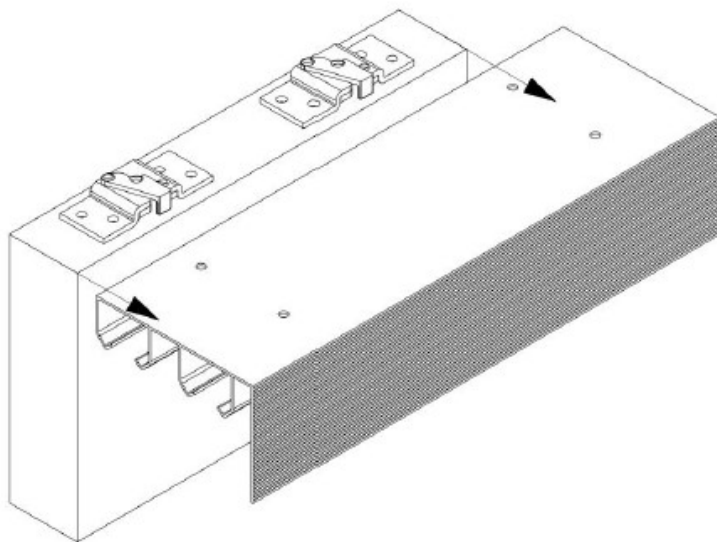

4 ADJUST AND FINISH

- Adjust carriers so door is square with frame
- Install door guides in center of opening, where doors overlap
- Drill appropriate dimensioned hole to mount door pull (optional)
- Install stops (optional)

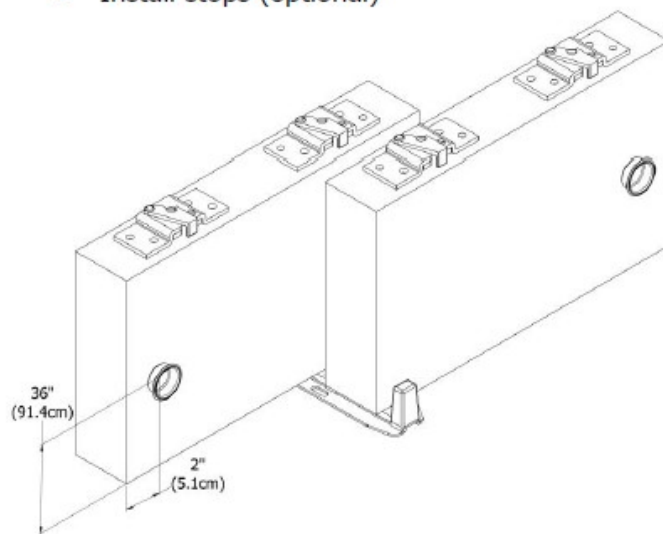

SKU: H9673



www.tmhardware.com



845-388-1300



845-388-1388



sales@tmhardware.com