




**TRADEMARK
HARDWARE**

WORLD OF QUALITY HARDWARE

**IMPORTANT: From centerline of
pivot point to end of track
is 26½" (673 mm)**

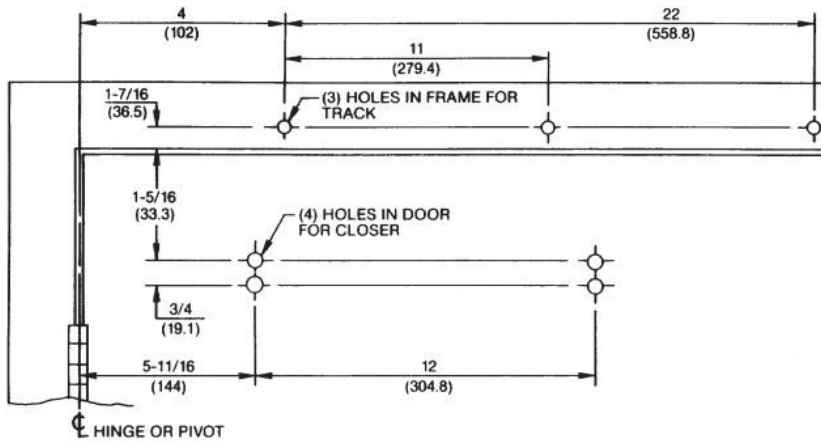

- Right hand door shown.
- Do not scale drawing.
- Dimensions are given in inches (mm.)
- Minimum ceiling clearance for unit is 2" (50mm.).
- Maximum door opening:
 - Non Hold Open with Spring Buffer - 110°
 - Non Hold Open without Spring Buffer - 180°
 - Hold Open - 110°

Preparation for Fasteners

Fasteners	Door or Frame	Drill-Sizes
#14 type "A" S.M. screw	Wood	3/16" (4.30mm.)
¼"-20 machine-screw	Metal	drill: #7 (.201") tap: ¼"-20
Sex-nuts and bolts (Optional)	Hollow-Metal	9/32" (7.00mm.) through; 3/8" (9.50mm.) door-face opposite to closer
	Aluminum or Wood	3/8" (9.50mm.) through
Through-bolt and grommet-nuts (Optional)	All	9/32" (7.00mm.) through; 3/8" (9.50mm.) dia. x 3/8" (10mm.) deep door- face opposite to closer

SKU: 8301ST

