



**Trademark
HARDWARE**

INSTALLATION GUIDE


Solutions to Door and Trim Damage

Choosing the correct protection bar:

1. Determine traffic - light to moderate use = SD Series, heavy use = HD Series
2. Measure projections - of exit device, door knob, etc.
3. Review product dimensions - to match bar to your specific needs.

Warning: do not locate protection bars where they can impede operation of exit devices.

How They Work

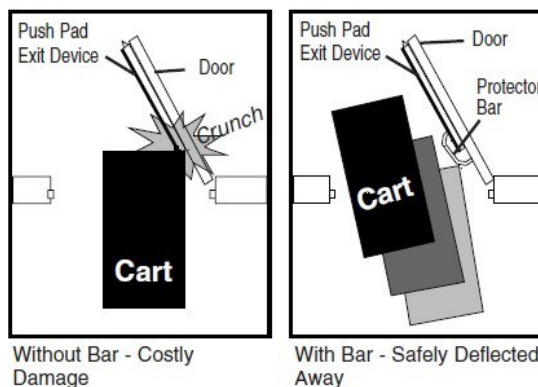

HD Series: Models R116EDPL and R116EDPH

1. Remove exit device from door.
2. Field cut hinge end of exit device as needed to mount exit device protector (EDP).
EDP should be centered over exit device and spaced 1/4" minimum from touch pad.
3. Reinstall exit device on door by drilling new holes for mounting bracket.
4. Position EDP over device and mark center to center for screw holes
5. Drill 5/16" holes for 1/4-20 thru bolts.
6. Mount EDP.

