

## LED Round High Bay Fixture INSTALLATION INSTRUCTIONS

### **READ AND FOLLOW ALL SAFETY INSTRUCTIONS!**



#### **WARNING**

- Make all electrical and grounded connections in accordance with local codes or the National Electrical Code. If you are not familiar with these codes and requirements, consult a qualified electrician. This professional should be familiar with the construction and operation of this product and hazards involved. Failure to do so may result in serious personal injury.
- To reduce the risk of fire, electric shock, personal injury, or property damage, please read and follow all safety instructions. If you do not understand these instructions or if any additional information is required, contact your local Topaz representative. Retain these instructions for maintenance reference.
- Make certain electrical supply is OFF before energizing fixture.
- Do not exceed the allowed supply voltage marked on the luminaire label information.



#### **CAUTION**

- Do not expose wires to any sharp objects such as sheet metal to prevent wiring damage or abrasion.
- To avoid risk of burn, be sure fixture temperature is cool enough to touch before handling.
- While the light is on, please avoid direct eye exposure.
- Combustible materials should be kept away from fixture/lens.


# LED Round High Bay Fixture

## INSTALLATION INSTRUCTIONS


### ELECTRICAL PARAMETERS

Model No.	Input Voltage	Frequency	Power	Rated Current
F-LUHBE/150W/5K-86	AC120-277V	50/60Hz	150W	1.8/0.6A

### Fixture Dimension

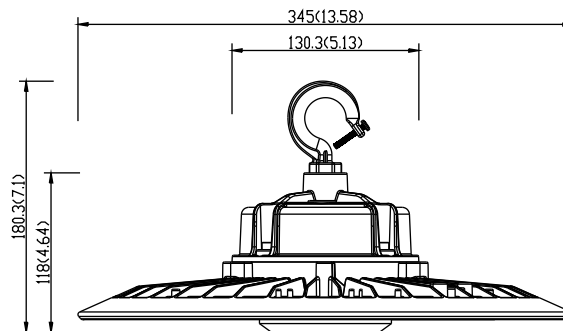


### INSTALLATION STEPS

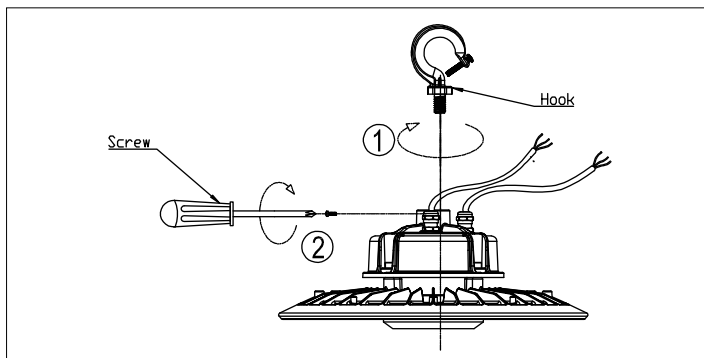

1. Open packaging and Remove the new round LED high bay. Handle new LED fixture with care and inspect for any damages. If there are any damages, call your Topaz local rep for replacement.

2. Install the enclosed bolt hook into the top of the luminaire and tighten securely. Tighten the screw with a Philips head screwdriver to prevent the bolt hook from loosening. (See Figure 1). **WARNING FAILURE TO TIGHTEN SCREW COULD CAUSE LUMINAIRE TO FALL RESULTING IN INJURY, DEATH OR SERIOUS PROPERTY DAMAGE.**

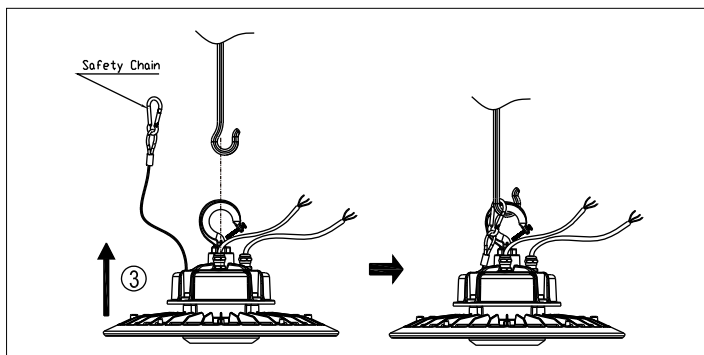


3. Install the fixture to the hook and secure the safety chain. (see Figure 3).

※ Note: safety cable must be used for all high bay applications.


# LED Round High Bay Fixture

## INSTALLATION INSTRUCTIONS

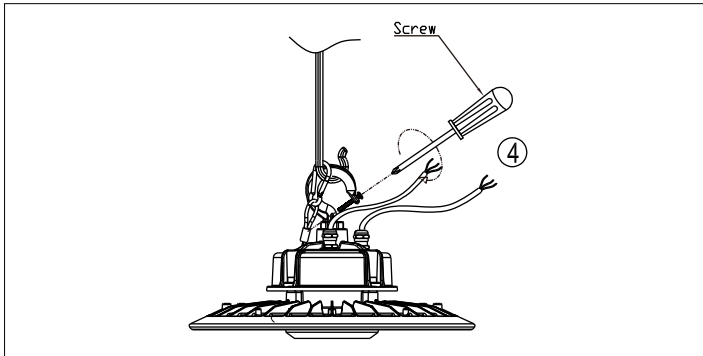

4. Tighten screws to secure mounting bolt hook. (see Figure 4).

### Wiring diagram:

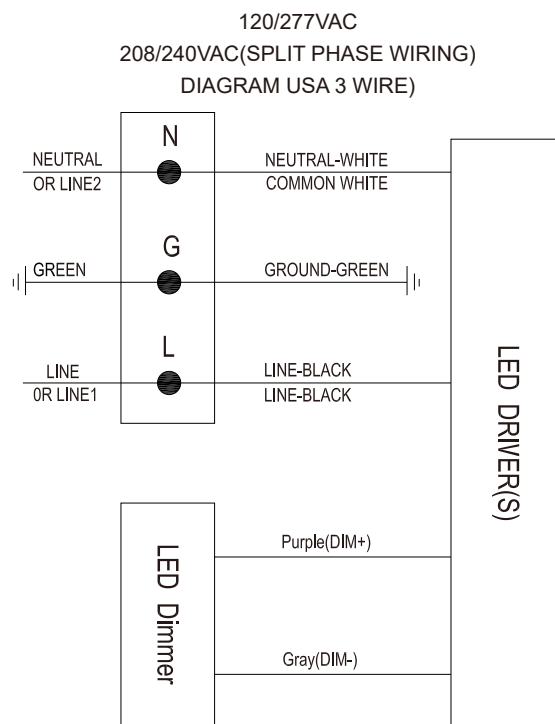

5. Connect the LED high bay to power. (Black - to - black, white - to - white and green - to - green) Purple and gray wires are for 0 - 10V dimming. Cap purple and gray wire separately when not used.

**Failure to follow any of these instructions could void product warranties. For a complete listing of product Terms and Conditions, please visit [www.topaz-usa.com/led-fixtures-warranty](http://www.topaz-usa.com/led-fixtures-warranty)**