



TRADEMARK
HARDWARE

Norton®

ASSA ABLOY

5800 ADAEZ® PRO Battery Charger Instructions

1

Connecting Battery Charger

VERIFY the connections on the battery charger connector



- ENSURE the BLACK wire from the charger is properly seated in the position marked “-” on the green connector
- ENSURE the WHITE wire from the charger is properly seated in the position marked “+” on the green connector

REMOVE auxiliary port connector cover from the battery pack.

ENSURE the battery pack switch is set to the “ON” position

PLUG the green connector on the ADA EZ PRO charger into the green port on the battery pack.

- The LED on the charger will light RED to indicate the battery is charging and will change to GREEN when charging is complete.
- If the LED on the charger flashes RED the battery pack must be replaced
- If the LED on the charger immediately turns GREEN and the LED on the battery pack indicates yellow, red, or gives no indication the battery must be replaced.
- If the LED on the charger remains RED for more than 3 hours and the LED on the battery pack indicates yellow, red, or gives no indication the battery must be replaced.

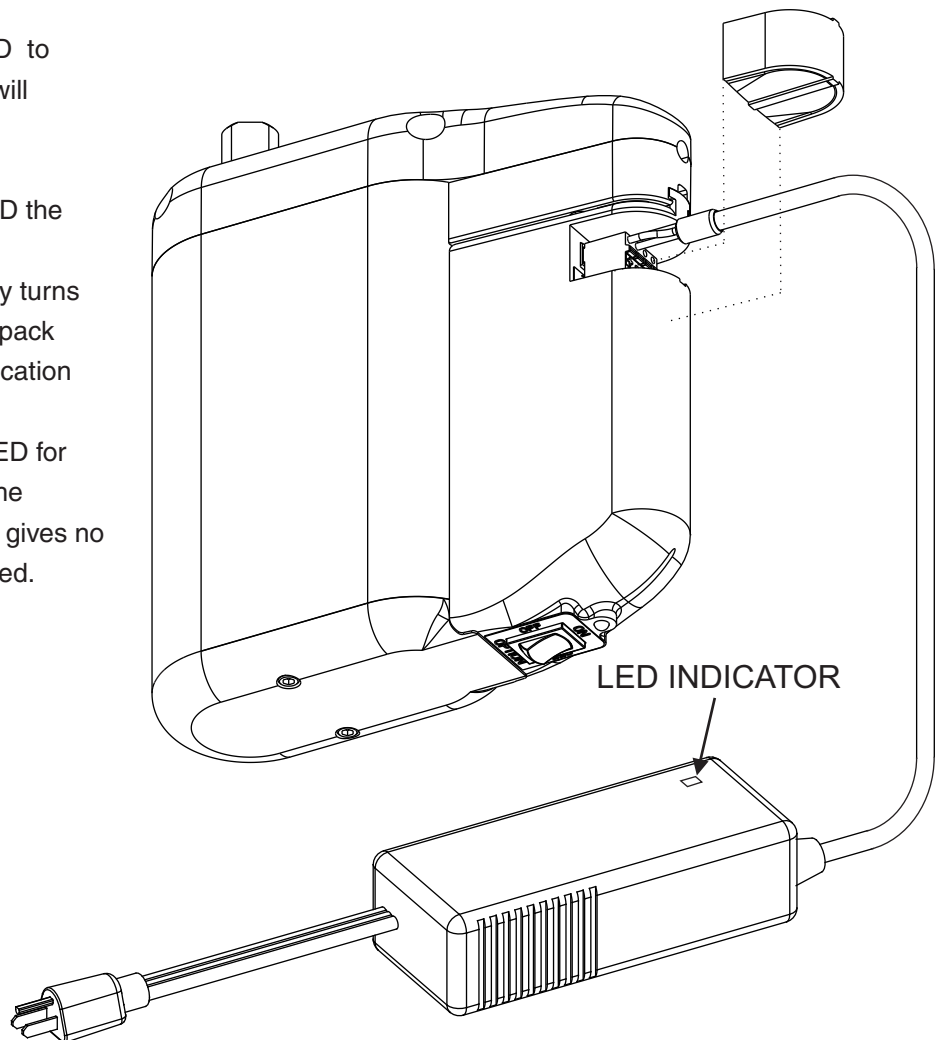

Norton Door Controls
3000 Highway 74 East
Monroe, NC 28112
Tel: (800)-438-1951 ext. 6030
www.nortondoortcontrols.com
support.aadcg@assaabloy.com

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience

Norton is a brand associated with Yale Security Inc., an ASSA ABLOY Group company. Copyright © 2017, Yale Security Inc. All rights reserved. Reproduction in whole or in part without the express written permission of Yale Security Inc. is prohibited.

ASSA ABLOY, the global leader in door opening solutions

700502-Rev E 08/18