

# INSTALLATION INSTRUCTIONS

⚠ Incorrect installation or adjustment  
could cause damage or injury.  
Read and follow instructions carefully.

YDC201  
YDC204



## Option A – Regular Arm Installation



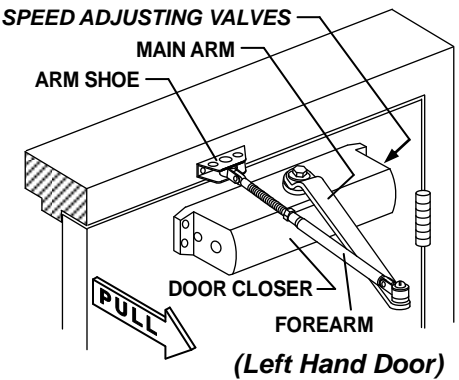


Diagram for Option A

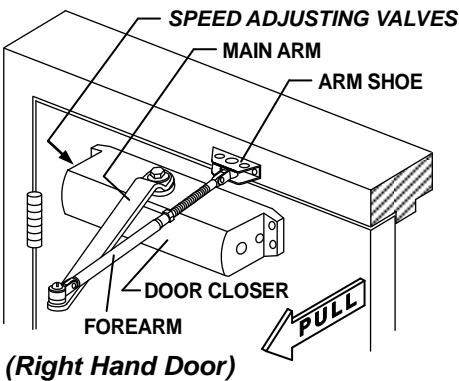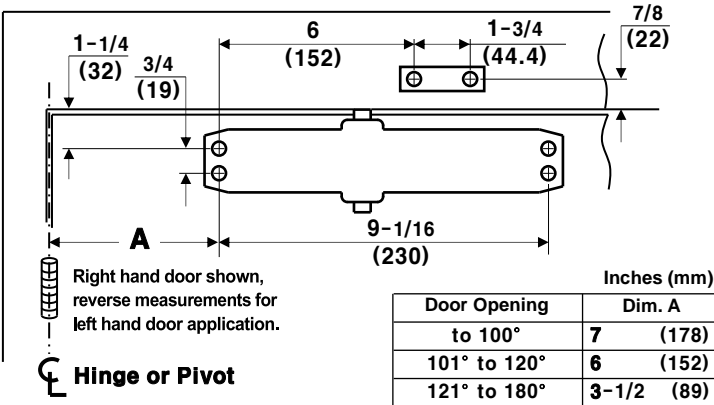

**Option A instructions:** 1. Using the measurements from diagram A, mark screw hole center locations. Mark four (4) hole locations on door for door closer and two (2) hole locations on frame for arm shoe. 2. Drill pilot holes in door and frame, drill 7/32" (5.5mm) diameter holes for wood screws or drill and tap #7 (.201" diameter) for 1/4-20 machine screws. 3. Install adjustable forearm/arm shoe to frame using screws (a) or (b). 4. Mount closer on door using screws (c) or (d). **SPEED ADJUSTING VALVES MUST BE POSITIONED TOWARD HINGE SIDE.** 5. Install main arm to top pinion shaft, perpendicular to door, Secure tightly with arm screw/washer (e). 6. Adjust length of forearm so it is perpendicular to frame when assembled to preloaded main arm. Secure forearm to main arm with screw/washer (f). 7. Adjust closing speed, see page2 for reference. 8. Snap pinion cap over shaft at bottom of closer or install (optional) cover with small screw (j).

## Option B – Top Jamb Installation




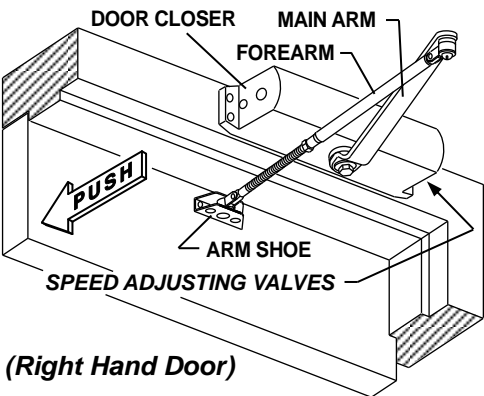


Diagram for Option B

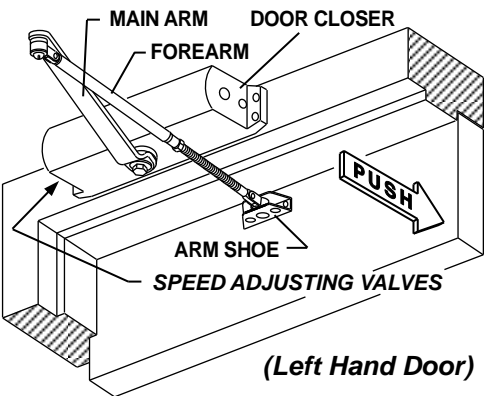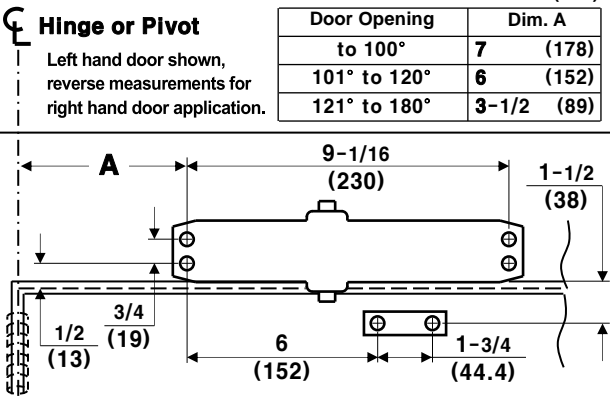


**Option B instructions:** 1. Using the measurements from diagram B, mark screw hole center locations. Mark four (4) hole locations on door for door closer and two (2) hole locations on frame for arm shoe. 2. Drill pilot holes in door and frame, drill 7/32" (5.5mm) diameter holes for wood screws or drill and tap #7 (.201" diameter) for 1/4-20 machine screws. 3. Install adjustable forearm/arm shoe to door using screws (a) or (b). 4. Mount closer on frame using screws (c) or (d). **SPEED ADJUSTING VALVES MUST BE POSITIONED TOWARD HINGE SIDE.** 5. Install main arm to bottom pinion shaft, perpendicular to door, Secure tightly with arm screw/washer (e). 6. Adjust length of forearm so it is perpendicular to door when assembled to preloaded main arm. Secure forearm to main arm with screw/washer (f). 7. Adjust closing speed, see page2 for reference. 8. Snap pinion cap over shaft at bottom of closer or install (optional) cover with small screw (j).

## Option C – Parallel Arm Installation

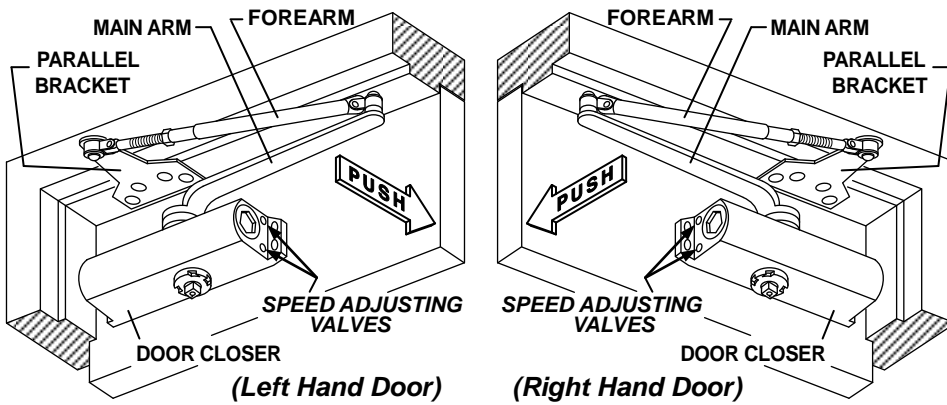


### Components

#### Screw Pack



#### Optional



#### Standard Pinion Cap



#### P-Bracket





Diagram for Option C

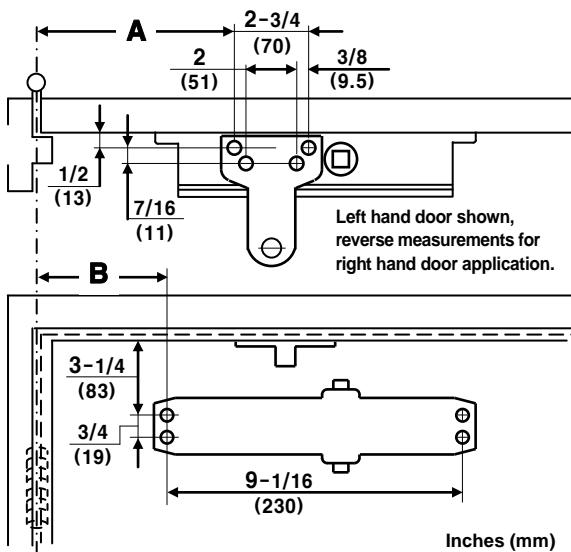

**Option C instructions:** 1. Using the measurements from diagram C, mark screw hole center locations. Mark four (4) hole locations on door for door closer and four (4) hole locations on inside frame for parallel bracket. 2. Drill pilot holes in door and frame, drill 7/32" (5.5mm) diameter holes for wood screws or drill and tap #7 (.201" diameter) for 1/4-20 machine screws. 3. Install Parallel bracket to frame using screws (g) or (h). 4. Mount closer on door using screws (c) or (d). **SPEED ADJUSTING VALVES MUST BE POSITIONED AWAY FROM HINGE SIDE.** 5. Place main arm on closer pinion shaft, index main arm - mark "L" or "R" with pinion flat as shown in Figure 1, Secure tightly with screw/washer (e). 6. Remove arm shoe from forearm (see figure2), install Parallel bracket to end of forearm using the screw (i). 7. With door closed, adjust length of forearm so that the tip of the main arm is approximately 1" (25mm) away from being parallel with door, when connected to the forearm. Secure with screw/washer (f). 8. Adjust closing speed, see below 9. Snap pinion cap over shaft at bottom of closer or install(optional) cover with small screw (j).

Door Opening	Dim. A	Dim. B
To 100°	9-1/4 (235)	7-5/8 (194)
101° to 130°	7-3/4 (197)	6-1/8 (156)
131° to 180°	5-3/4 (146)	4-1/8 (105)

### Hinge or Pivot

Left hand door shown, reverse measurements for right hand door application.


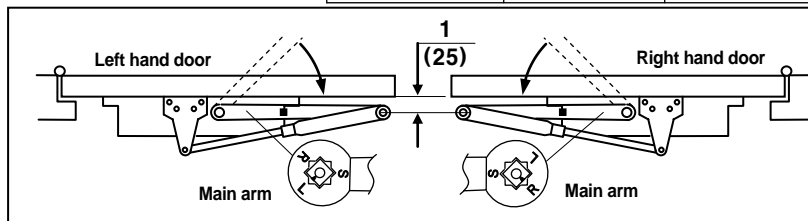


Figure 2



## DOOR CLOSER ADJUSTMENTS

CLOCKWISE FOR FULL NUMBERS (+)

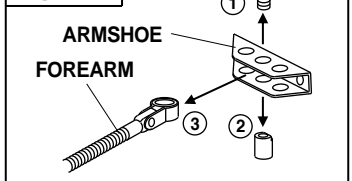

COUNTERCLOCKWISE FOR NEGATIVE NUMBERS (-)

### POWER ADJUSTMENT CHART

DOOR CLOSER SIZE	FULL TURNS OF POWER ADJUSTING SCREW	APPLICABLE DOOR LEAF WIDTH		APPLICABLE DOOR WEIGHT
		INTERIOR	EXTERIOR (SWING OUT)	
BF	-	5 lb-f	-	-
1	- 14	32" (0.81m)	28" (0.71m)	33~56 LBS (15~30 Kg)
2	- 10	36" (0.91m)	32" (0.81m)	56~99 LBS (30~45 Kg)
3	0 (PRESET)	42" (1.07m)	36" (0.91m)	99~143 LBS (45~65 Kg)
4	+ 6	48" (1.22m)	42" (1.07m)	143~187 LBS (65~85 Kg)

Use 4mm Hex For this

Power Adjusting Screw


4mm Wrench

INCREASE  
DECREASE

**CAUTION!!** Do not turn speed adjusting valves more than two (2) full turns counter-clockwise. Do not back valves out of closer or a leak will result.

BACK CHECK  
Adjusting Valve

SLOWER  
FASTER




CLOSING CYCLE

LATCH  
Adjusting Valve

SWEEP  
Adjusting Valve

INCREASE  
DECREASE



OPENING CYCLE



The closing force is adjustable from a size 1 to size 4, as outlined in ANSI Standard A156.4. When these series of door closers are installed and adjusted to conform to ADA reduced opening force requirements (5 lbs max.) for interior doors, they may not have adequate closing force to reliably close and latch door. Power adjustments charted on this page are recommended where possible, to ensure proper door control.



By law the Americans with Disabilities Act (ADA) may require that door closer installation comply with accessibility guidelines.

Yale Locks & Hardware

Product Support Tel 800.438.1951 • [www.yalelocks.com](http://www.yalelocks.com)

Yale Locks & Hardware Is a division of Yale Security Inc., an ASSA ABLOY Group company.