

## The Glazing Supply Company **EXPERIENCE AND INNOVATION**

**GLAZING SUPPLIES** SHOWER DOOR HARDWARE ARCHITECTURAL HARDWARE **RAILING HARDWARE** TRANSACTION HARDWARE METAL EXTRUSIONS


4361 Firestone Blvd. South Gate, CA 90208 | Toll Free: (888) 295-4531 | Fax: (323) 336-8307 | fhc-usa.com

## **FHC Venice Series**

**Frameless Shower Door Hinge** 

ITEM NO. VEN180CH 180 Degree Glass-to-Glass Hinge Standard Closing Position

- Industry Standard Square Body **Profile 3-15/16" Tall**
- Heavy-Duty Design For Heavier and Wider Doors
- Designed For 3/8" to 1/2" **Tempered Glazing**
- Seven Popular Finishes
- Self-Centering Within 15 Degrees of Closing Position
- For Use in Residential Bath and **Commercial Hotel Applications**
- Reversible 5 Degree Pivot Pin that **Doesn't Require Special Tools**
- High Quality Solid Brass Construction With State-of-the-Art Plating Process

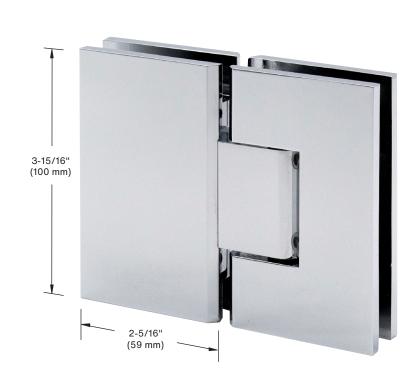

## **MAXIMUM CAPACITY:**

MAXIMUM DOOR CAPACITY	3/8" (10 mm) GLASS Approx. 5 lb/ft <sup>2</sup>	1/2" (12 mm) GLASS Approx. 6.4 lb/ft <sup>2</sup>
	DOOR WEIGHT	DOOR WIDTH
USING 2 HINGES	110 LBS. (50 kg)	36" (914 mm)
USING 3 HINGES	140 LBS. (64 kg)	36" (914 mm)

NOTE: Do not exceed either maximum weight or width when choosing proper quantity of hinges

Cut-Out Required: Specific Cut-Out Templates Available at fhc-usa.com. Includes: Hinge, Glazing Gaskets, Wall Mounting Screws, Allen Head/ Phillips Head Cover Plate Screws, and Fabrication Template.





## **Available Finishes**





ORB OIL

**BRONZE** 







BRUSHED

**BRONZE\*** 

