


## **FALCON 1990 EXIT DEVICE PRODUCT SPECS**

## Tough crossbar design.

The classic look of 1990 has a long history of reliable performance. It is equipped with hardened steel latches and adjustable strike to ensure safety, security and quiet operation.



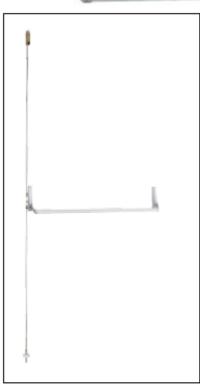

## Positioning retractor as shown for NL or HB functions.

Install retractor as shown below for both RHR and LHR doors; this makes all keys function in the same direction.







Night latch (NL)

## Specifications

Hand:	Field reversible, non handed.		
Functions:	See trim selection chart on this page.		
Finishes:	P28, P13, P35, US26D.		
Strikes:	PB48 top.		
Latches:	Hex bottom latch (standard), RL - rod bottom latch, PL - Pullman bottom latch, ES - electric strike top latch (optional). Device needs to be less bottom rod (LBR).		
Dogging feature:	Hex dogging standard.		
Cylinder:	Rim, key entry (NL) or hold back (HB) available (field selectable)		
Sizes:	Field adjustable width, 41" crossbar standard extra length cross bar available.		
Doors:	1 <sup>3</sup> / <sub>4</sub> " thick metal doors.		
Projections:	4 <sup>3</sup> / <sub>8</sub> " extended, 2 <sup>1</sup> / <sub>2</sub> " depressed.		
Stile:	1 <sup>3</sup> / <sub>4</sub> " minimum.		
Fasteners:	All mounting screws are concealed.		
ANSI:	Certified ANSI A156.3 grade 1 standards.		
UL:	UL305 listed.		
Vertical rods:	7' standard, extension rod kits available up to 10'.		

Model	Trim Package	Туре	Function
1990	No outside trim	6	01
1991	Pull only (9970)	6	02
1992	Cylinder only	6	03/04
1993	Pull and cylinder	6	02/03/04



