


EKU Forte 170/340 Partial Extension

Weight capacity: 170 kg (374 lbs.)

- 3 mm (+2/-1) height adjustment with adjusting screw, permitting alignment of the front panel
- 8 ball bearing mounted plastic covered steel rollers
- 2 friction bearing mounted steel rollers
- 1 friction bearing mounted cylinder steel roller
- Rubber buffers on the rails and runner ensure silent action
- Return guide and retainer provide for the accurate closure of the cabinet pull-out safety stop

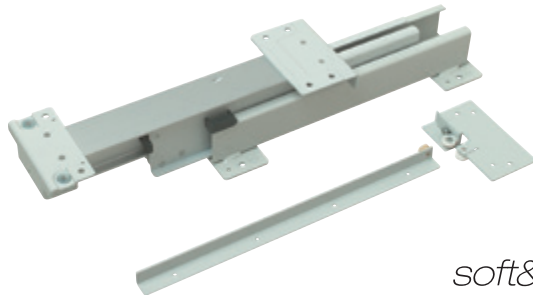

soft&silent)))


Top/Bottom Mounted

Material: Steel; Color: gray RAL 7035

Installed Length	Extension Length	Item No.
*385 (15 3/16")	380 (14 15/16")	421.48.381
435 (17 1/8")	430 (16 15/16")	421.48.431
485 (19 1/16")	480 (18 7/8")	421.48.481
535 (21 1/16")	530 (20 7/8")	421.48.531
585 (23")	580 (22 13/16")	421.48.581
635 (25")	630 (24 13/16")	421.48.631
685 (27")	680 (26 3/4")	421.48.681
785 (30 15/16")	780 (30 11/16")	421.48.781
885 (34 13/16")	880 (34 5/8")	421.48.881
985 (38 3/4")	980 (38 9/16")	421.48.981
1085 (42 3/4")	1080 (42 1/2")	421.48.991

Supplied With

Top runner
Mounting instructions

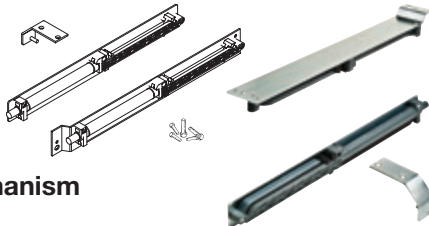

Easy Close Mechanism

Material: Steel, Plastic

Item No.
421.48.021

Note

*Damping is not possible on the shortest length





Connection Set

Weight capacity: 340 kg (748 lbs.)

- For connecting two pull-out cabinet guides
- For internal cabinet heights up to 2400 mm (94 1/2") and internal cabinet widths up to 800 mm (31 1/2")
- Installation height remains the same



Material: Steel, galvanized

Item No.
421.48.001

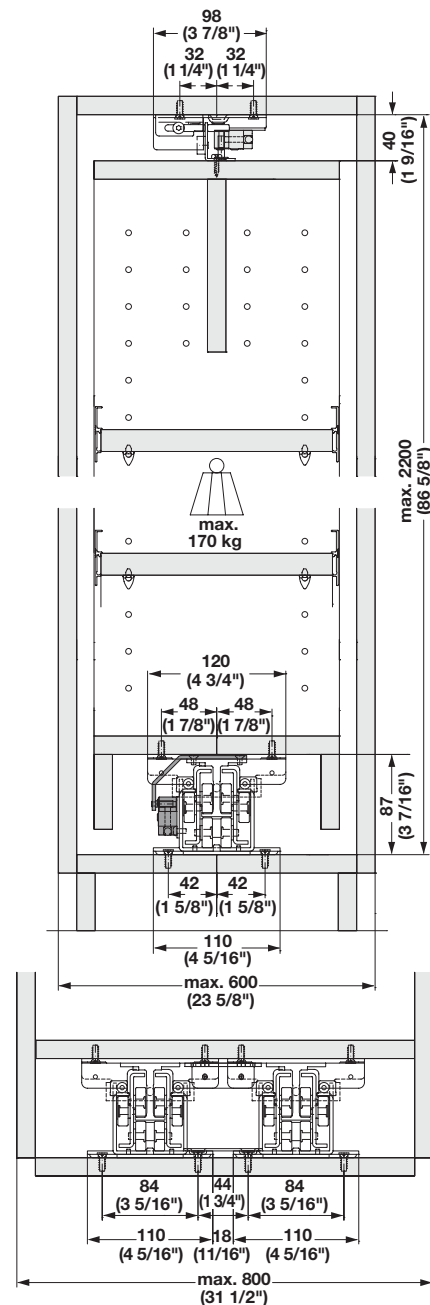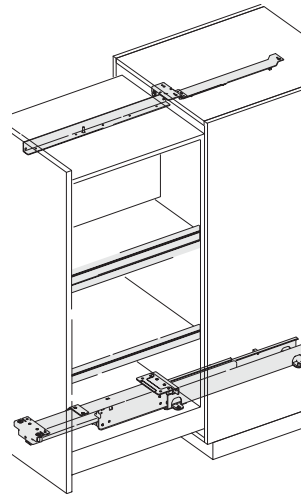

Dimensional data not binding. We reserve the right to alter specifications without notice.

EKU Forte Accessories

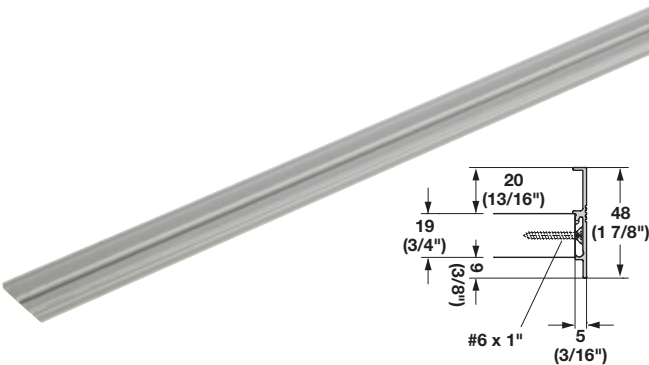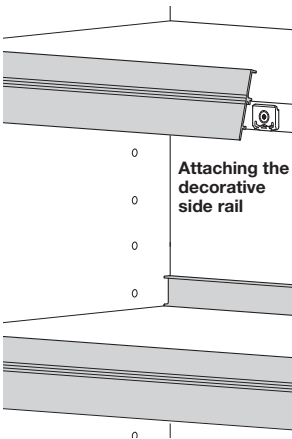


Decorative Side Rail

- For shelf mounting
- Length: 3000 mm (118")

Material: Aluminum, anodized

Item No.
421.48.030



Mounting Jig

Material: Plastic

Color	Item No.
gray	405.44.002

Mounting Clip

- Use every 250 mm (9 3/4")

Material: Plastic

Color	Item No.
gray	405.83.343

Dimensional data not binding. We reserve the right to alter specifications without notice.