



TEMPLATE HIMGES
ELECTRIC THROUGH WIRE

AND MONITOR TYPE ETM
SIZES: 5 x 4, 5 x 4 1/2, 5 x 5

ło.	REVISION	BY	DATE
1	ECO CT05035	RAM	8-15-05


ETM MAXIMUM
ELECTRICAL RATING
SWITCH
VOLTS 30V DC
AMPERES .500A
CONTACT THROUGH WIRE
VOLTS 48V DC
AMPERES
3.5A CONTINUOUS CURRENT
16.0A CURRENT INRUSH
(300 MILLISECONDS)


DRILLING INSTRUCTIONS

NOTE A: DRILL AND DEBURR Ø 1" HOLE IN FRAME REINFORCEMENT FOR THROUGH WIRES.

NOTE B:

- NON-HANDED INSTALLATION-DRILL AND DEBURR TWO (2) 3/4" HOLES IN DOOR REINFORCEMENT PLATE FOR THROUGH WIRES.
- RIGHT HAND INSTALLATION— DRILL AND DEBURR Ø 3/4" HOLE FOR THROUGH WIRES IN DOOR REINFORCEMENT PLATE ON BOTTOM LEFT.
- LEFT HAND INSTALLATION— DRILL AND DEBURR Ø 3/4" HOLE FOR THROUGH WIRES IN DOOR REINFORCEMENT PLATE ON UPPER RIGHT.

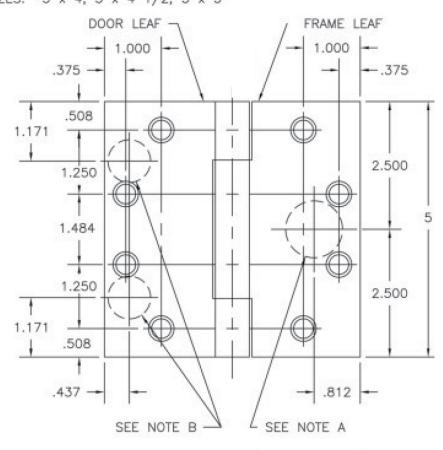



SKU: HAB850







